

Anritsu Advancing beyond

Rubidium™

RF/Microwave Signal Generator

MG36221A
9 kHz to 20 GHz

MG36241A
9 kHz to 43.5 GHz

MG36271A
9 kHz to 70 GHz



Introduction

The Rubidium™ MG362x1A is a microwave signal generator offering industry's lowest phase noise, best in class harmonics and spurious, excellent frequency stability, high output power, upgradability, reliability, and service. Our signal generators are configurable for a broad range of applications from R&D to manufacturing and depot repair. The Rubidium MG362x1A signal generator product line is built to deliver outstanding signal purity and frequency stability across a broad frequency range of 9 kHz to 70 GHz, even at high output power levels. The exceptional frequency stability coupled with low phase noise performance makes the Rubidium MG362x1A the ideal choice for many measurement applications. Anritsu provides a total solution including proven reliability and standard 3 year warranty plus pre-sale and post-sale support that is the best in the industry.

Instrument Highlights

- Frequency range: 9 kHz to 20/43.5/70 GHz
- Operable to 72 GHz
- Frequency resolution: 0.001 Hz
- SSB phase noise: -136 dBc/Hz (typical) and -140 dBc/Hz (measured) at 10 GHz output, 10 kHz offset
- Internal time base stability - Aging: $< \pm 2 \times 10^{-8}$ per year with Option 3
- Frequency range extendable to 1.1 THz
- Reference frequency input/output: 10 MHz, 100 MHz, 1600 MHz
- Up to +30 dBm leveled output power
- Output power:
 - 130 dBm to +20 dBm (20 GHz standard output)
 - 130 dBm to +16 dBm (43.5 GHz, standard output)
 - 100 dBm to +6 dBm (70 GHz, standard output)
- Harmonics: (20/43.5/70 GHz) -55 dBc
- Non-harmonics: (20/43.5/70 GHz) -63 dBc
- Modulation: AM, FM, PM, and Pulse
- Leveled pulse modulation
- Pulse modulation: Rise/Fall times 5 ns (typical)
- Pulse train generator option to simulate complex pulse radar signals.
- LF signal generator waveforms: Sine, square, pulse, triangle, ramp, GN/UN noise, User defined
- Frequency sweep modes: Analog, Step, List
- Frequency sweep width: 9 kHz to full frequency range (step, list), 100 MHz to full frequency range (Analog)
- Power sweep: Step and List
- Power sweep resolution: 0.01 dB/step
- On-site User Level Calibration

Capabilities and Functional Highlights

- The Low Phase Noise option delivers improved close-in phase noise from the standard Rubidium along with better frequency stability.
- The Ultra Low Phase Noise Option provides improved phase noise at higher offsets.
- For CW only applications between 2 GHz to 20 GHz, Rubidium provides even lower phase noise than the Ultra Low Phase Noise option, by another 3 dB on a separate RF output port at the back panel.
- The low noise RF/microwave signal generator Rubidium MG362x1A offers atomic clock frequency stability with an internal rubidium frequency reference option.
- Modulation capabilities include AM, FM, phase, and pulse to address simple to complex signal simulation requirements.
- Comprehensive pulse generation capabilities for testing pulse radar systems.
- On-site user level calibration capabilities helps maintain level accuracy over time, saves time and cost, and improves instrument availability.

MG362x1A Dimensions

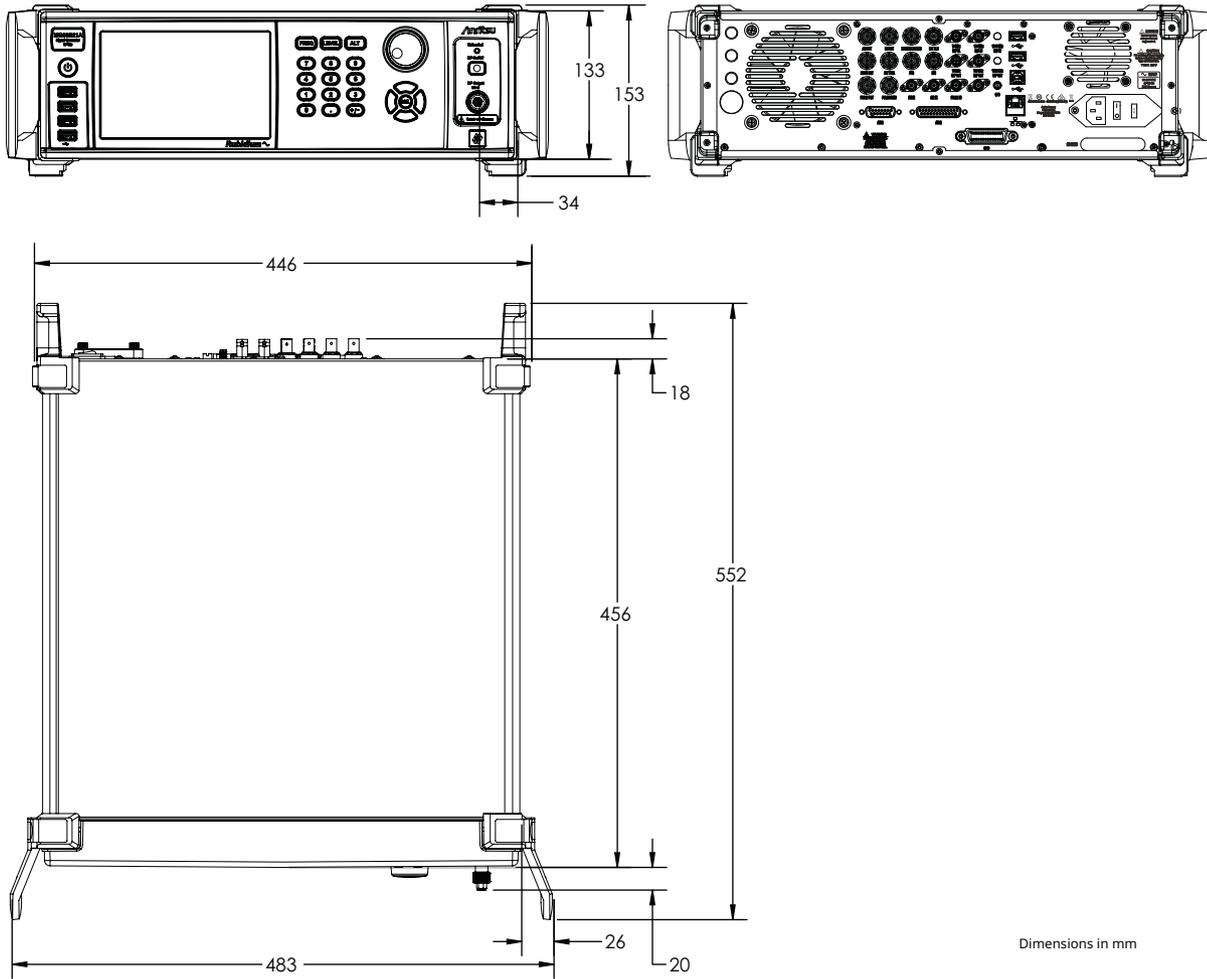


Table of Contents

Definitions.....5

Frequency.....6

 Internal Time Base.....6

 Internal Reference Output.....6

 External Reference Input.....6

 Electronic Frequency Control.....6

Signal Purity.....7

 Harmonic and Harmonic Related (dBc).....7

 Non-harmonic (dBc).....7

 Sub-harmonics (dBc).....7

 Power Line and Fan Rotation Spurious Emissions (dBc).....7

 Residual FM.....7

 Single-Sideband Phase Noise.....8

 Premium Phase Noise, CW (Option 23).....12

 Phase Noise, (Option 23) (dBc/Hz).....12

 Harmonics, (Option 23) (typical).....12

 Output Power Unleveled (Option 23).....12

 Spurious, (Option 23).....12

Output Power.....13

 Maximum Leveled Output Power.....13

Accuracy and Flatness.....16

 Step Sweep and CW Modes.....16

 Minimum Settable Output Power.....16

 Minimum Leveled Output Power.....16

 Unleveled Output Power Range.....16

 Power Level Switching Time.....16

 Step Attenuator (Option 2).....16

 General Output Power Specifications.....16

 On-site User Level Calibration (Option 18).....16

Power Modes.....17

 CW Power Sweep.....17

Frequency Modes.....18

 Phase-Locked Step Sweep.....18

 Analog Sweep Mode (Option 6).....18

 Frequency Switching Time.....18

 Definitions.....18

 Switching Time.....19

 List Sweep.....19

 Frequency Markers (Option 6 required).....19

 Sweep Triggering.....19

AM, FM, Φ M, and Pulse Modulation, Internal/External.....20

 Amplitude Modulation (Option 12).....20

 Frequency/Phase Modulation (Option 12).....20

 Frequency Modulation.....21

 Phase Modulation.....22

 External FM/Phase Mod Input.....22

 Pulse Modulation (Option 26).....22

 Modulation Hardware (Option 27).....23

 Pulse Train (Option 25).....23

 User Defined Modulation (Option 10).....23

Millimeter-wave Frequency Coverage.....24

 Millimeter-wave Multiplier 2000-2087-R Through 2000-2098-R Series.....24

 General Specifications.....25

 Performance Specification.....25

 Output Attenuation.....26

General	27
Remote Operation	27
Environmental (MIL-PRF-28800F, class 3)	27
Regulatory Compliance	27
Rear Panel	28
Rear Panel Connectors	28
Rear Panel Connectors	29
Ordering Information	29
MG36221A Options	29
MG36241A Options	30
MG36271A Options	30
Standard Accessories	30
Upgrades	31
MG362x1A Option Configuration Matrix	31
USB Power Sensors	32
Transit Case	32
Accessories	32
Coaxial Adapters	32
Optional Accessories	33
Adapters	33
Precision Adapters	34
Coaxial Adapters	34
Attenuators	34
Fixed Attenuators	35
Test Port Cables, Flexible, Ruggedized, Phase Stable	36
Phase Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)	36

Definitions

Supplemental characteristics, denoted as (typical), measured, or nominal, provide additional (non-warranted) information, helpful in the application of the product.

Warranted Performance	All specifications and characteristics apply under the stated conditions below, unless otherwise stated: <ul style="list-style-type: none"> • After 30 minutes of warm-up time, where the instrument is left in the on state. • Over the 25 °C ± 5 °C temperature range.
Typical Performance	Typical specifications in parenthesis () describe performance that will be met by a minimum of 80% of all products. They do not include guard bands and are not warranted.
Measured Performance	Represents characteristic performance not warranted, but most likely to occur.
Nominal Performance	Represents representative performance not warranted or statistically derived from measurements, but by design.
Calibration Cycle	Recommended calibration cycle is 2 years from the date of shipment (Standard Warranty). All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com

Frequency

	Model	Frequency Coverage	Output Connector
	MG36221A	9 kHz to 20.0 GHz	2.92 mm K(m)
	MG36241A	9 kHz to 43.5 GHz	2.92 mm K(m)
	MG36271A	9 kHz to 70 GHz	1.85 mm V(m)
	Frequency Resolution	0.001 Hz	
	Frequency Accuracy	Same as internal or external time base	
	Phase Offset	Adjustable in 0.1 degree steps	

Internal Time Base

	Standard	Option 3	Option 56
Time Base Type	OCXO	OCXO	Rubidium
Aging Rate per Year	$< \pm 5 \times 10^{-7}$	$< \pm 2 \times 10^{-8}$	$< \pm 1 \times 10^{-9}$
Temperature Effects from 0 to 55 °C	$< \pm 3 \times 10^{-7}$	$< \pm 2 \times 10^{-9}$	$< \pm 3 \times 10^{-10}$
Short-term Stability (Allan Deviation per 100 s after 2 hours warm up)	NA	NA	$< 8.0 \times 10^{-12}$

Internal Reference Output Provides a sine wave signal derived from the internal time base 50 Ω nominal impedance connectors, rear panel.

	Standard	Option 3 or 13	Option 3 or 13
Frequency (nominal)	10 MHz	100 MHz	1600 MHz
Output Level, ±3 dB	10 dBm	12 dBm	5 dBm

External Reference Input

	Standard	Option 3
Input Frequency	10 MHz	1 Hz (PPS), 10 MHz, 100 MHz, 1600 MHz
10 MHz REF IN	Accepts an external 10 MHz ± 2 ppm (± 0.03 ppm for Option 3), 0 dBm to +10 dBm (+20 dBm damage level) reference signal (50 Ω nominal impedance, BNC type connector, rear panel).	
100 MHz REF IN (Option 3)	Accepts an external 100 MHz ± 2 ppm, +10 to +14 dBm (+20 dBm damage level) reference signal (50 Ω nominal impedance, BNC type connector, rear panel).	
1600 MHz REF IN (Option 3)	Accepts an external 1600 MHz ± 2 ppm, +3 to +7 dBm (+20 dBm damage level) reference signal (50 Ω nominal impedance, SMA, rear panel).	
PPS (Option 3)	Supports +3.3 V CMOS input/output selectable from reference menu. CMOS high-impedance input, BNC type connector, rear panel.	

Electronic Frequency Control Provides the capability to frequency modulate the internal crystal oscillator allowing phase locking of the synthesizer inside an external lock loop. High impedance (1 MΩ nominal), BNC type connector, rear panel. Accepts -4 to +4 VDC input voltage, 30 Hz bandwidth in wide reference PLL mode, 5 Hz/V minimum for standard reference, 0.75 Hz/V minimum for Option 3.

Signal Purity

In CW Mode. All specifications for < 40 GHz at the lesser of +10 dBm output or maximum specified leveled output power unless otherwise noted.

Harmonic and Harmonic Related (dBc)

Frequency Range	Standard + 10 dBm	Standard (Option 15) + 5dBm	(Option 15) +10 dBm	(Option 15) +15 dBm	(Option 15) +20 dBm
9 kHz to < 31.25 MHz	-35	-	-35	-30	-23
31.25 MHz to ≤ 1.3 GHz	-57 ^a	-	-57 ^b	-50	-47
> 1.3 GHz to < 2 GHz	-60	-	-60	-57	-52
≥ 2 GHz to ≤ 20 GHz	-60	-	-60	-60	-58
> 20 GHz to ≤ 24 GHz	-60	-	-20	-20	-15
> 24 GHz to ≤ 40 GHz	-60	-	-35	-35	-30
> 40 GHz to ≤ 43.5 GHz	-60	-55 ^c	-35	-35	-30
> 43.5 GHz to ≤ 70 GHz	-	-55 ^c	-	-	-

a. -55 for MG36241A and MG36271A models

b. -53 for MG36241A and MG36271A models

c. For MG36271A model

Non-harmonic (dBc)

Frequency Range	Standard
9 kHz to < 31.25 MHz	-65
31.25 MHz to ≤ 20 GHz	-70
> 20 GHz to ≤ 43.5 GHz	-63
> 43.5 GHz to ≤ 70 GHz	-63 ^a

a. Measured at + 5 dBm for MG36271A model

Sub-harmonics (dBc) Sub-harmonics are defined as f_{out}/N , where N is an integer.

Frequency Range	MG36221A	MG36241A	MG36271A
9 kHz to ≤ 20 GHz	-83	-83	-83
> 20 GHz to ≤ 32.5 GHz	-	-83	-75
> 32.5 GHz to ≤ 40 GHz	-	-83	-63
> 40 GHz to ≤ 43.5 GHz	-	-52	-63 ^a
> 43.5 GHz to ≤ 70 GHz	-	-	-63 ^a

a. Measured at +5dBm.

Power Line and Fan Rotation Spurious Emissions (dBc) (measured)

Frequency	Offset From Carrier	
	≤ 300 Hz	> 300 Hz to 1 kHz
9 kHz to ≤ 500 MHz	-90	-100
> 500 MHz to < 2 GHz MHz	-80	-100
≥ 2 GHz to ≤ 20 GHz	-60	-90
> 20 GHz to ≤ 43.5 GHz	-53	-83
> 43.5 GHz to ≤ 70 GHz	-50	-79

Residual FM In CW, Step Sweep, and Unlocked FM modes Modes, all specifications apply at the lesser of +10 dBm output or maximum specified leveled output power unless otherwise noted. Residual FM (Hz RMS) (Residual FM spec does not apply to modulation modes)

Frequency Range	Residual FM (kHz RMS)		
	Standard (0.05 to 15 kHz BW)	Low Phase Noise (0.05 to 15 kHz BW)	Ultra Low Phase Noise (0.05 to 15 kHz BW)
9 kHz to ≤ 1 GHz	80 mHz	75 mHz	70 mHz
> 1 GHz to ≤ 10 GHz	360 mHz	350 mHz	280 mHz
> 10 GHz to ≤ 20 GHz	800 mHz	770 mHz	620 mHz
> 20 GHz to ≤ 43.5 GHz	2.5 Hz	2.25 Hz	2.2 Hz
> 43.5 GHz to ≤ 70 GHz	4 Hz	3.6 Hz	3.5 Hz

Single-Sideband Phase Noise

Phase noise is specified and guaranteed only with internal reference. In External Reference mode, the phase noise of the external supplied reference, and the selected external reference bandwidth, will dictate the instrument phase noise performance. Phase noise is not degraded when adding high power Option 15. Phase noise measured at +10 dBm for frequencies ≤ 43.5 GHz; otherwise, measured at +5 dBm or maximum power, whichever is lower.

Standard Phase Noise (typical), (dBc/Hz)			Offset from Carrier					
Frequency	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
100 MHz	-94 (-99)	-123 (-128)	-142 (-147)	-149 (-154)	-150 (-155)	-147 (-153)	-150 (-156)	-150 (-156)
1 GHz	-74 (-79)	-103 (-108)	-132 (-138)	-140 (-146)	-144 (-150)	-145 (-151)	-153 (-159)	-153 (-159)
10 GHz	-54 (-59)	-83 (-88)	-113 (-119)	-127 (-132)	-127 (-132)	-132 (-138)	-151 (-157)	-153 (-159)
20 GHz	-48 (-53)	-77 (-82)	-107 (-113)	-120 (-125)	-118 (-123)	-127 (-133)	-150 (-156)	-153 (-159)
43.5 GHz	-41 (-46)	-71 (-76)	-100 (-106)	-110 (-115)	-111 (-116)	-118 (-124)	-136 (-142)	-137 (-143)
67 GHz	-37 (-42)	-66 (-71)	-96 (-102)	-110 (-115)	-110 (-115)	-115 (-121)	-134 (-140)	-136 (-142)
70 GHz	-36 (-41)	-65 (-70)	-95 (-101)	-109 (-114)	-109 (-114)	-114 (-120)	-133 (-139)	-135 (-141)


Low Phase Noise (Option 3) (typical), (dBc/Hz)			Offset from Carrier					
Frequency	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
100 MHz	-110 (-116)	-126 (-132)	-145 (-151)	-150 (-155)	-151 (-156)	-147 (-153)	-150 (-156)	-151 (-157)
1 GHz	-90 (-96)	-106 (-112)	-133 (-139)	-140 (-146)	-145 (-151)	-145 (-151)	-153 (-159)	-153 (-159)
10 GHz	-70 (-76)	-86 (-92)	-113 (-119)	-128 (-133)	-128 (-133)	-134 (-140)	-151 (-157)	-153 (-159)
20 GHz	-64 (-70)	-80 (-86)	-107 (-113)	-120 (-125)	-120 (-125)	-127 (-133)	-150 (-156)	-153 (-159)
43.5 GHz	-57 (-63)	-73 (-79)	-100 (-106)	-110 (-115)	-113 (-118)	-121 (-127)	-137 (-143)	-140 (-146)
67 GHz	-53 (-59)	-69 (-75)	-96 (-102)	-111 (-116)	-111 (-116)	-117 (-123)	-134 (-140)	-136 (-142)
70 GHz	-52 (-58)	-68 (-74)	-95 (-101)	-110 (-115)	-110 (-115)	-116 (-122)	-133 (-139)	-135 (-141)


Ultra Low Phase Noise (Option 13) (typical), (dBc/Hz)			Offset from Carrier					
Frequency	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
100 MHz	-110 (-116)	-126 (-132)	-145 (-151)	-150 (-155)	-151 (-156)	-148 (-154)	-150 (-156)	-151 (-157)
1 GHz	-90 (-96)	-106 (-112)	-133 (-139)	-141 (-147)	-146 (-152)	-146 (-152)	-153 (-159)	-153 (-159)
10 GHz	-70 (-76)	-86 (-92)	-113 (-119)	-131 (-136)	-132 (-137)	-135 (-141)	-151 (-157)	-153 (-159)
20 GHz	-64 (-70)	-80 (-86)	-107 (-113)	-124 (-129)	-124 (-129)	-129 (-135)	-150 (-156)	-153 (-159)
43.5 GHz	-57 (-63)	-73 (-79)	-100 (-106)	-112 (-117)	-115 (-120)	-122 (-128)	-137 (-143)	-140 (-146)
67 GHz	-53 (-59)	-69 (-75)	-96 (-102)	-114 (-119)	-115 (-120)	-118 (-124)	-134 (-140)	-136 (-142)
70 GHz	-52 (-58)	-68 (-74)	-95 (-101)	-113 (-118)	-114 (-119)	-117 (-123)	-133 (-139)	-135 (-141)


Export Phase Noise (Option 33)

Rubidium instrument providing high quality phase noise without needing Export license.

Option 33 provides the best phase noise performance possible for export to other countries, thereby eliminating the logistics associated with obtaining an export license. Contact your sales representative for details.

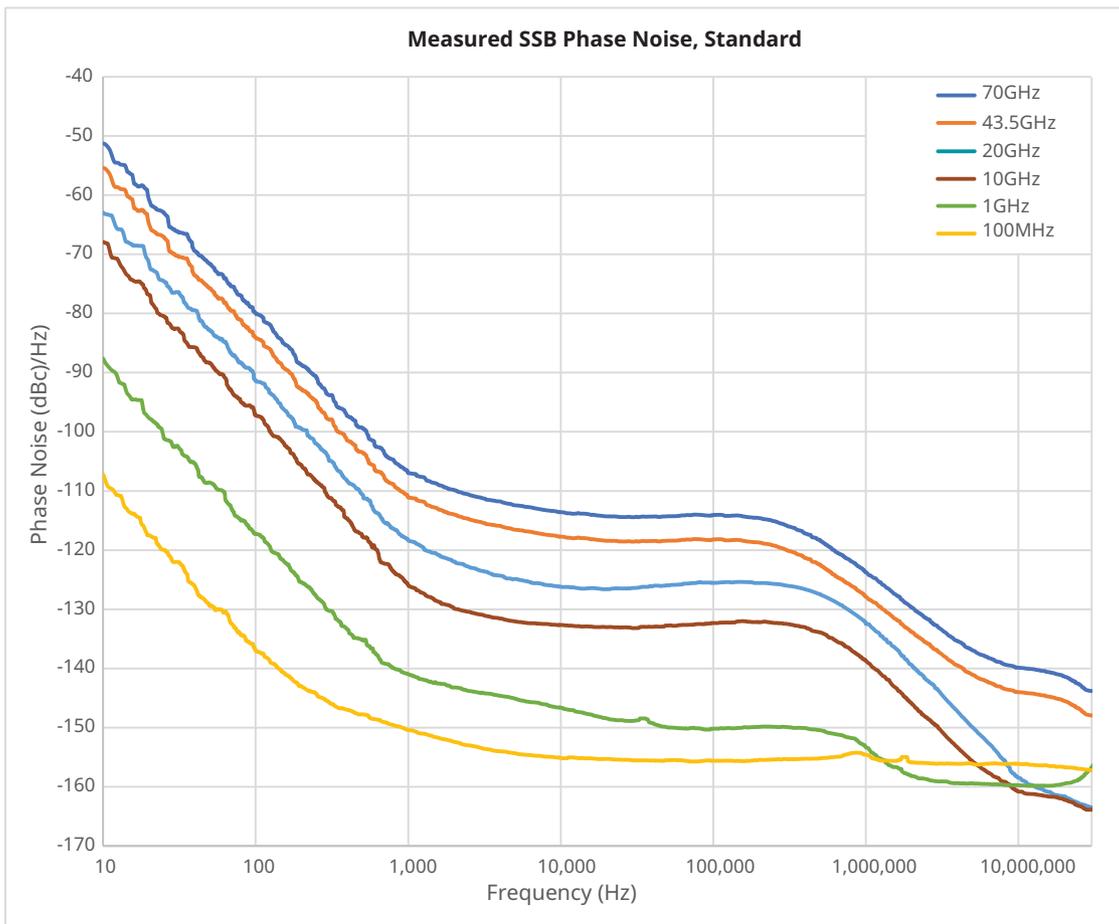

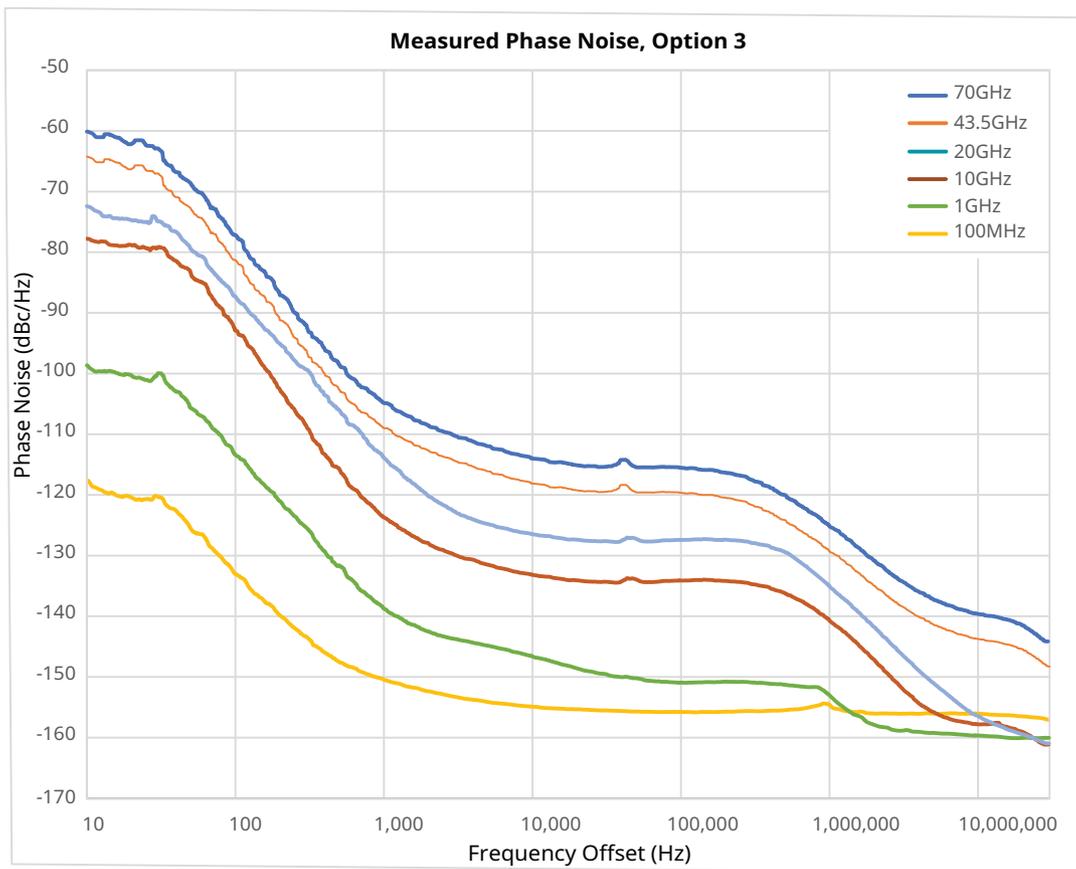

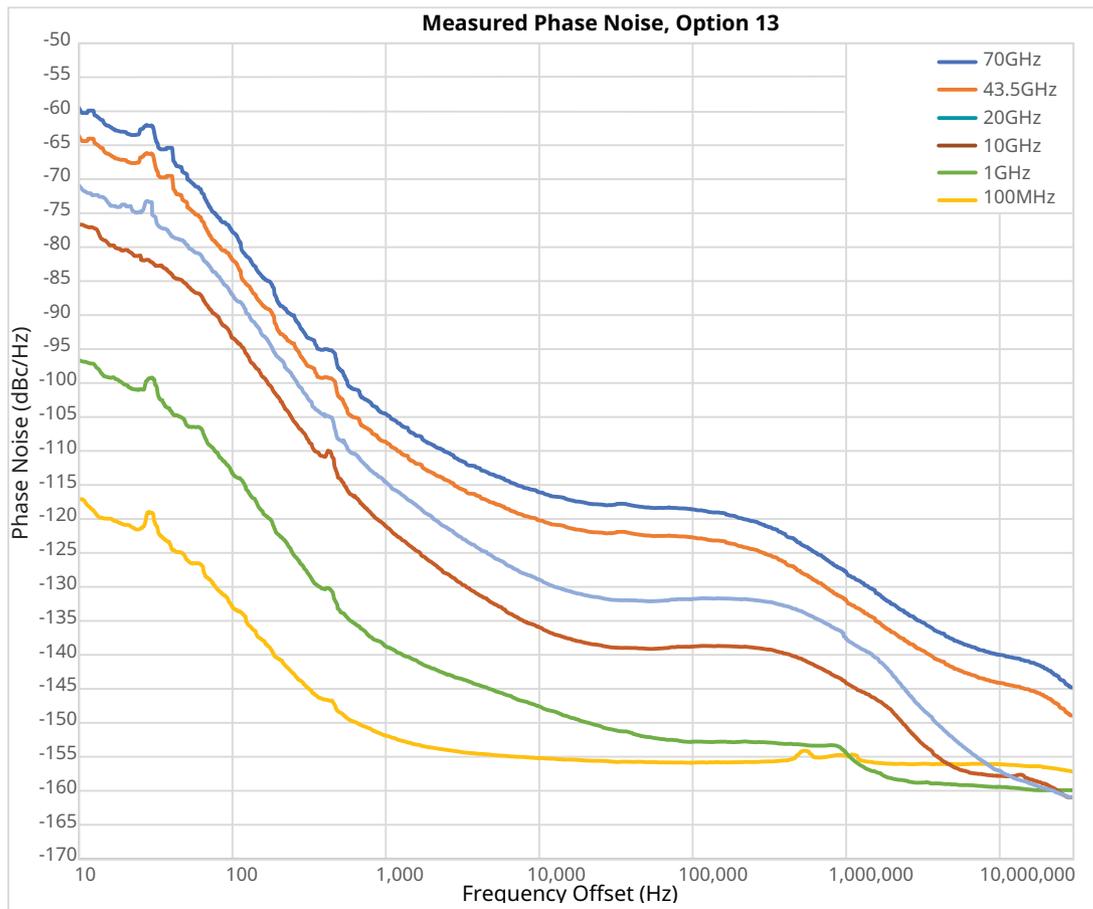

Premium Phase Noise, CW (Option 23)

A user-controlled switch routes signal directly from the synthesizer core to a Rear Panel RF output connector, eliminating the noise contribution of power amplifiers and leveling circuits. Output is 2 GHz to 20 GHz, unlevelled, nominally +14 to +23 dBm. Phase noise at intermediate offsets is reduced by about 3 dB relative to front panel output. (Front panel RF output is disabled while the Rear Panel output is in use).

Phase Noise, (Option 23) (dBc/Hz) measured

Frequency	Offset from Carrier							
	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
2 GHz	-90	-106	-132	-150	-150	-148	-165	-169
10 GHz	-76	-92	-118	-140	-140	-145	-163	-166
20 GHz	-70	-86	-112	-134	-134	-139	-157	-160


Harmonics, (Option 23) (typical)

Frequency	dBc
2 GHz to ≤ 14 GHz	< -10
> 14 GHz to ≤ 20 GHz	< -25

Output Power Unlevelled (Option 23)

Frequency	dBc
2 GHz to ≤ 18 GHz	> 15
> 18 GHz to ≤ 20 GHz	> 14

Spurious, (Option 23) < -70 dBc


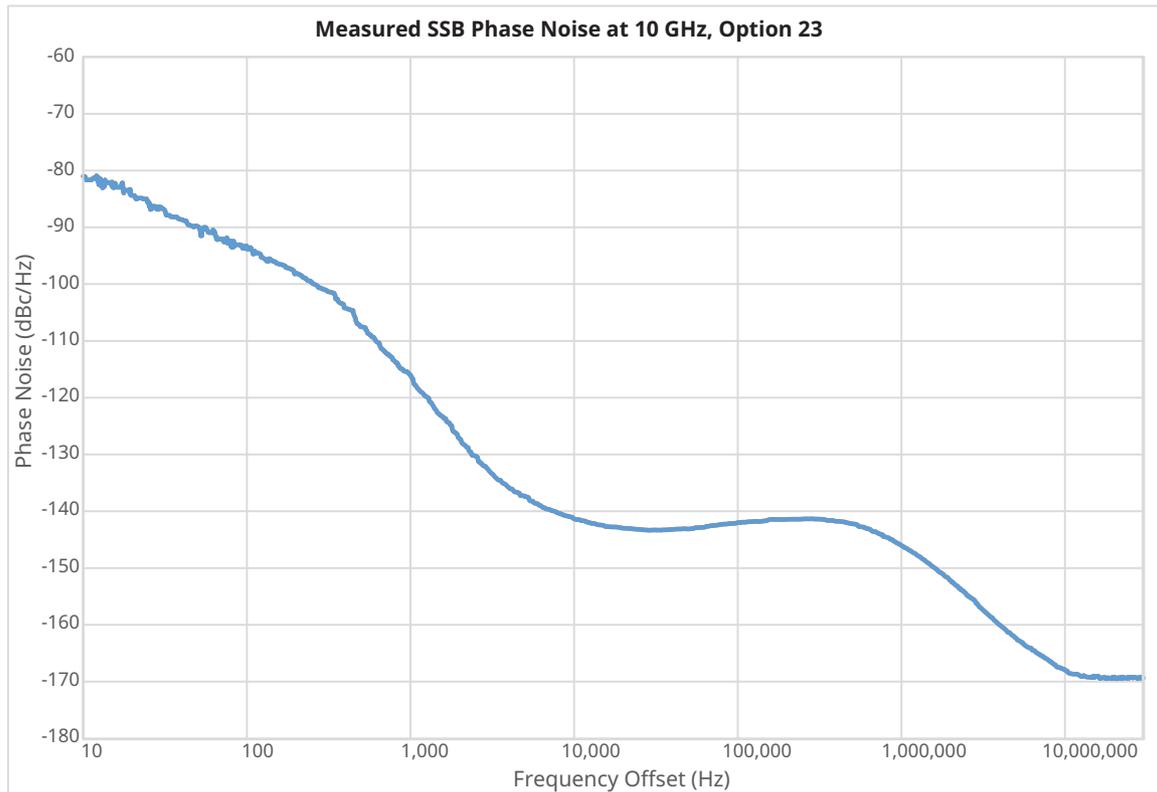



Output Power

Maximum Leveled Output Power

Standard Power	Frequency Range	Output Power (dBm)	Output Power With Step Attenuator (dBm)
MG36221A	9 kHz to < 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+21	+20
	> 10 GHz to ≤ 20 GHz	+20	+19
MG36241A	9 kHz to ≤ 2 GHz	+19	+18
	> 2 GHz to ≤ 10 GHz	+19	+18
	> 10 GHz to ≤ 20 GHz	+16	+15
	> 20 GHz to ≤ 43.5 GHz	+16	+15
MG36271A	9 kHz to ≤ 13 GHz	+18	+18
	> 13 GHz to ≤ 37 GHz	+13.5	+11.5
	> 37 GHz to ≤ 65 GHz	+10.5	+9.5
	> 65 GHz to ≤ 67 GHz	+9	+5
	> 67 GHz to ≤ 70 GHz	+6 (typical)	+3 (typical)

High Power (Option 15)	Frequency Range	Output Power (dBm)	Output Power With Step Attenuator (dBm)
MG36221A	9 kHz to < 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+30	+30
	> 10 GHz to ≤ 18 GHz	+30	+28
	> 18 GHz to ≤ 20 GHz	+28	+27
MG36241A	9 kHz to < 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+29	+27
	> 10 GHz to ≤ 20 GHz	+23	+22
	> 20 GHz to ≤ 25 GHz	+20	+19
	> 25 GHz to ≤ 35 GHz	+23	+21
	> 35 GHz to ≤ 40 GHz	+20	+18
	> 40 GHz to ≤ 43.5 GHz	+20	+15
MG36271A	9 kHz to ≤ 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+27	+21
	> 10 GHz to ≤ 20 GHz	+23	+21
	> 20 GHz to ≤ 37 GHz	+14.5	+11.5
	> 37 GHz to ≤ 42 GHz	+11	+8.5
	> 42 GHz to ≤ 60 GHz	+15	+11.5
	> 60 GHz to ≤ 65 GHz	+13	+9.5
	> 65 GHz to ≤ 67 GHz	+9	+5
	> 67 GHz to ≤ 70 GHz	+9 (typical)	+3 (typical)

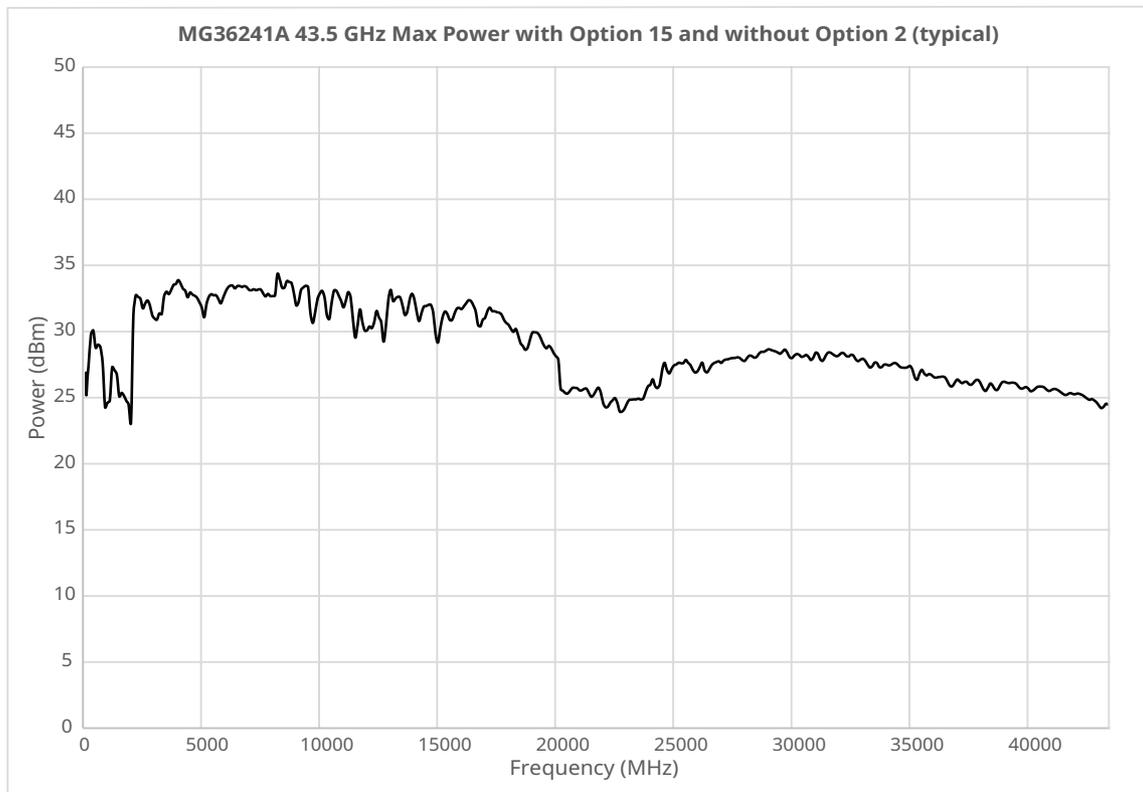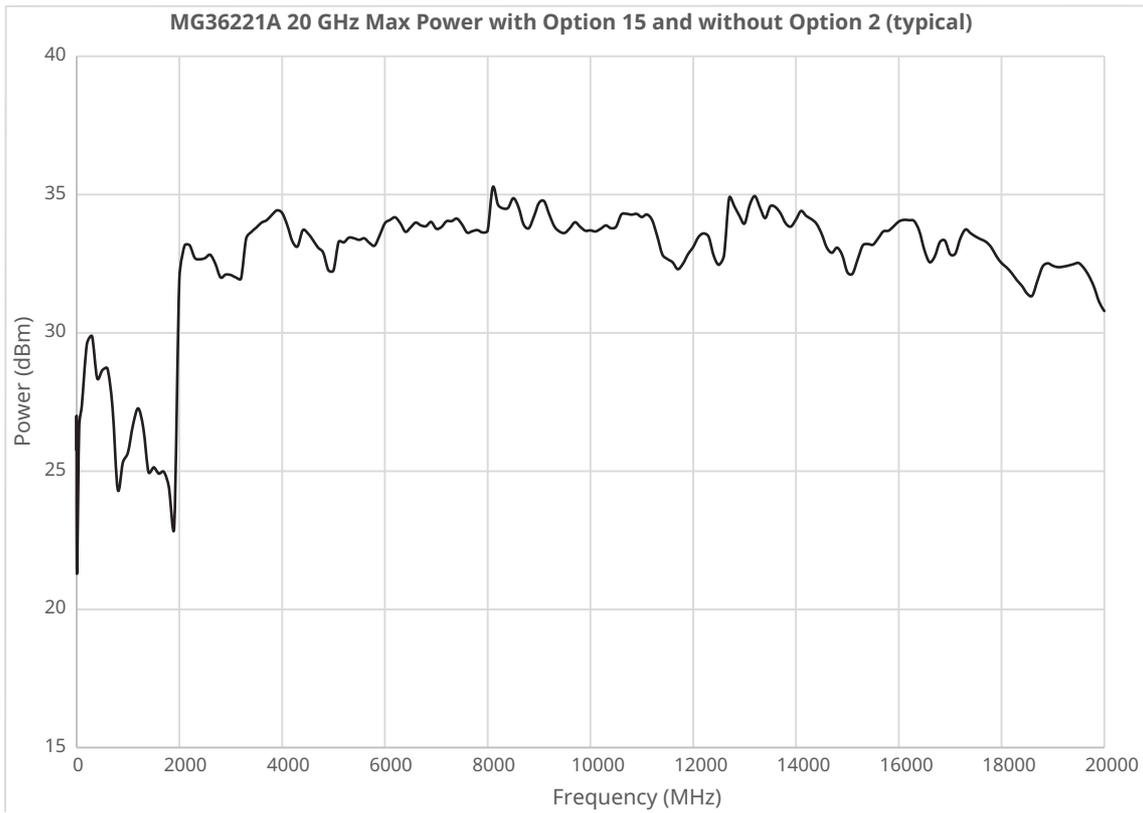

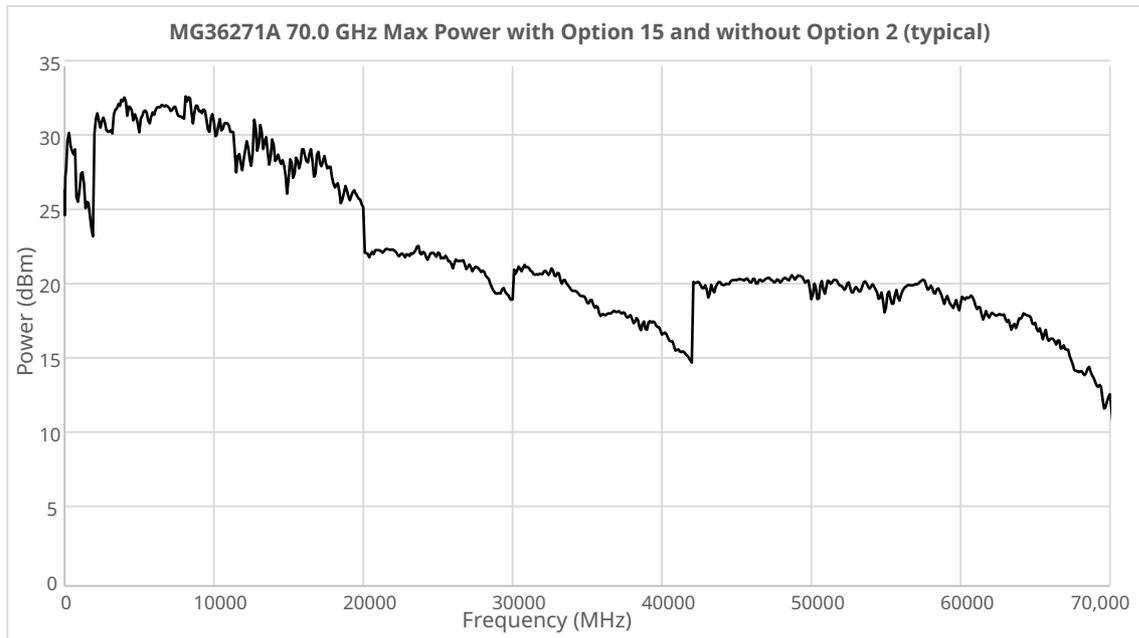

Accuracy and Flatness

Flatness is included within the accuracy specification.

Step Sweep and CW Modes

Model	Power Range	Frequency	Accuracy
MG36221A, MG36241A	To -90 dBm	9 kHz to ≤ 40 GHz	± 1 dB
		> 40 GHz to 43.5 GHz	± 1.4 dB
MG36271A	To -70 dBm	9 kHz to ≤ 40 GHz	± 1 dB
		> 40 GHz to ≤ 67 GHz	± 1.5 dB
		> 67 GHz to 70 GHz	± 1.5 dB (typical)
	<-70 dBm to -90 dBm	9 kHz to ≤ 40 GHz	± 2 dB
		> 40 GHz to ≤ 67 GHz	± 2.5 dB
		> 67 GHz to 70 GHz	± 2.5 dB (typical)

Minimum Settable Output Power

Without an Attenuator	-20 dBm
With an Attenuator	-130 dBm

Minimum Leveled Output Power

Without an Attenuator	-15 dBm (MG36221A and MG36241A)
	-20 dBm (MG36271A)
With an Attenuator	-120 dBm (MG36221A and MG36241A)
	-100 dBm (MG36271A)

Unleveled Output Power Range

(typical)	
Without an Attenuator	> 40 dB below max power
With an Attenuator	> 130 dB below max power

Power Level Switching Time

(to within specified accuracy)	
Without Change in Step Attenuator	< 3 ms (typical)
With Change in Step Attenuator	< 20 ms (typical)

Step Attenuator (Option 2)

Adds a 10 dB/step attenuator
 110 dB range on models ≤ 43.5 GHz
 90 dB range on models > 43.5 GHz to 70 GHz

General Output Power Specifications

Output Units	Selectable units are dBm, dBμV, and V. Selection of V assumes a 50 Ω load. All data entry and display are in the selected units
Output Power Resolution	0.01 dB or 0.000 001 V
Output Impedance	50 Ω nominal
Output SWR (Internal Leveling)	< 2.0 (typical)
Power Level Stability with Temperature	± 0.04 dB/°C
Level Offset	Offsets the displayed power level to establish a new reference level
RF On/Off	Toggles the RF output between an Off and On state
RF On/Off Between Frequency Steps	System menu selection of RF On or RF Off during frequency switching in CW, Step Sweep, and List Sweep modes
RF On/Off During Retrace	System menu selection of RF On or RF Off during retrace
Internal Leveling	Power is leveled at the output connector in all modes

On-site User Level Calibration (Option 18)

The on-site user level calibration option provides an internal level calibration interface with a level and flatness accuracy of ± 1dB (typical). Connecting a MA24330A, MA24340A, or MA24350A USB power sensors to the RF output connector of the Rubidium signal generator and connecting the power sensor USB cable to the front or rear panel Type-C USB ports provides an internal level flatness calibration user interface controlled through the MG362x1A front panel.

Power Modes

CW Power Sweep

Range	Sweeps between any two power levels at a single CW frequency
Operating Modes	Step, List
Triggering Modes	Auto, Single
Triggering Source	Internal Free run, External (pos/neg) through BNC connector, Bus
Resolution	0.01 dB/step (Log) or 0.000 001 V (Linear)
Accuracy	Same as CW power accuracy
Log/Linear Sweep	Power sweep selectable as either log or linear. Log sweep is in dB; linear sweep is in V
Sweep Shape	Sawtooth
Step Size	User-controlled, 0.01 dB (Log) or 0.000 001 V (Linear) to the full power range of the instrument
Step Dwell Time	Variable from 10 μ s to 100 seconds. If the sweep crosses a step attenuator setting, there will be a sweep dwell of approximately 20 ms to allow setting of the step attenuator

Frequency Modes

Phase-Locked Step Sweep

Sweep Width	Independently selected, 9 kHz to full range Every frequency step in sweep range is phase-locked
Accuracy	Same as internal or external time base
Linear/Log Sweep	User-selectable linear or log sweep In log sweep, step size logarithmically increases with frequency
Steps	User-selectable number of steps or the step size
Number of Steps	Variable from 2 to 65535
Step Size	0.001Hz to the full frequency range of the instrument If the step size does not divide into the selected frequency range, the last step is truncated
Resolution (Minimum Step Size)	0.001 Hz
Sweep Mode	Auto, Manual
Triggering Mode	Auto, Single
Trigger Source	Auto, Single, External, Manual
Dwell Time Per Step	Variable from 10 μ S to 100 S


Analog Sweep Mode (Option 6)¹

Sweep Range	Available for MG36221A and MG36241A only. Start frequency during analog sweep is ≥ 100 MHz and Stop frequency is less than or equal to max. frequency. A range error will be displayed if any of these analog sweep start/stop limits are exceeded. Analog sweep is not available < 100 MHz.
Triggering	Auto, Single, External
Sweep Time Range	30 ms to 99 s
Sweep Speed	≤ 50 MHz/ms nominal


Frequency Switching Time

Definitions

Free Running Mode	Step or List Sweep t_{sw} =Switching Time, Unlocked
Lock Status Indicator	Rear Panel AUX I/O connector (pin 11) The lock status indicator goes high when the output is within 1 kHz of the final frequency t_{lk} = Locked Time = 1 ms + t_{dw} t_{dw} = Dwell Time, after locking. Selectable, 1 ms minimum t_{lk} (min) = 2 ms

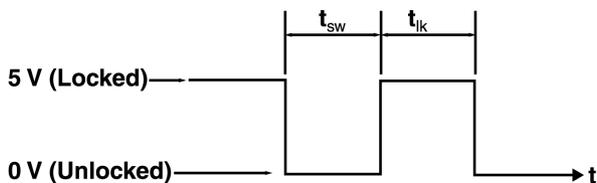

Single Frequency Trigger Mode	(List, non-sequential, and CFx modes) t_r = Trigger Response Time = 2 ms (Applies to GPIB, Ethernet and External TTL triggers)
-------------------------------	--

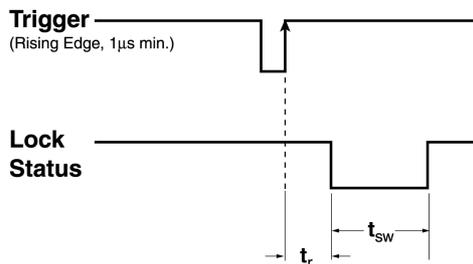

1. Adding Option 6 changes minimum CW frequency of MG362x1A from 9 kHz to 10 MHz.

Switching Time

Switching time is from Unlocked indication to frequency settled to within < 1 kHz of final.

$$T_{msec} = T1 + T2 + \text{abs} [(F1 + K1)*N1 - (F2 + K2)*N2]*1 \text{ msec/GHz, where:}$$

T1 = 7.5 ms

T2 = 3 msec if F2 is < 2 GHz, otherwise T2 = 0

F1 = RF output frequency, GHz, at beginning of the frequency step

F2 = RF output frequency, GHz, at end of the frequency step

Kx = LO frequency, GHz, (internal to the DDC or HET downconverter) for given Fx.

Nx = YIG frequency division ratio, per the chart below, for given Fx

RF Output (GHz)	YIG Divider (N)	Downconverter LO, GHz (K)
> 40 to 70	0.25	0
> 20 to 40	0.5	0
2 to 20	1	0
> 1 to < 2	2	0
> 0.5 to 1	4	0
> 0.25 to 0.5	8	0
> 0.125 to 0.25	16	0
> 0.0625 to 0.125	32	0
0.03125 to 0.0625	64	0
0.000009 to < 0.03125	8	0.3

List Sweep

Manual, GPIB, or Ethernet control, up to 10 tables with 4000 non-sequential frequency/power sets can be stored and then addressed as a phase-locked step sweep. All tables are stored in non-volatile memory. Only one table is exposed on the GUI.

Triggering Mode	Auto, Single, External, Manual
Trigger Source	Internal free run, external through BNC connector, timer, Bus
Rate (list mode switching)	See Frequency Switching Time
Sweep Range	9 kHz to full frequency range and amplitude range
Dwell Time	10 μs to 100 s
Minimum Step Size	0.001 Hz

Frequency Markers (Option 6 required)

Description	Up to 20 independent, settable markers (F0 – F9 and M0 – M9)
Video Markers	+5 V or -5 V marker output, selectable from system menus AUX I/O connector, rear panel
Intensity Markers	Produces an intensity dot on analog display traces, obtained by a momentary dwell in RF sweep, in analog sweeps of < 1 second.
Marker Accuracy	Same as sweep frequency accuracy
Marker Resolution:	Analog Sweep: 1 MHz or Sweep Width/4096, which ever is greater Step Sweep: 0.01 Hz

Sweep Triggering

Auto	Sweep triggering is provided for Step Frequency Sweep, List Frequency Sweep, and CW Power Sweep Triggers sweep automatically
External	Triggers a sweep through BNC connector, Bus
Single Sweep	Triggers, aborts, and resets a single sweep Reset sweep may be selected to be at the top or bottom of the sweep
Single Step	Triggers each step of the sweep and waits for next trigger

AM, FM, ΦM, and Pulse Modulation, Internal/External

Option 12 adds amplitude, frequency and phase modulation. Option 26 adds pulse modulation. Modulation can be driven internally or externally. Internal modulation requires Option 27. External modulation is driven via rear panel 50 ohms BNC connectors, one each for AM and FM/ΦM. External modulation can also be driven from 50 Ω BNC connectors on the front panel with Option 29. AM, FM, ΦM, and Pulse modulation types may be simultaneously enabled except FM with ΦM.

Amplitude Modulation (Option 12) All amplitude modulation specifications apply at 50 % depth, 1 kHz rate, sine wave, leveled ALC, with RF level set 6 dB below maximum specified leveled output power, unless otherwise noted

AM Depth	Linear: 0 % to 90 % (nominal) Log: 0 dB to 20 dB (nominal)
Accuracy	±7 % relative to readout
AM Bandwidth (3 dB)	DC to > 50 kHz (nominal)
Harmonic Distortion	< 5 % at 1 kHz: (nominal)
External AM Input	Log AM or Linear AM input Rear-panel BNC (50 Ω input impedance)
Sensitivity	Log AM: Continuously variable from 0 dB per volt to 25 dB per volt Linear AM: Continuously variable from 0 % per volt to 100 % per volt
External AM Input	±1 Vpk maximum, Rear Panel BNC 50 ohms input impedance (Standard) 600 ohms input impedance (Option 30)
Damage Level	±5 V

Frequency/Phase Modulation (Option 12) In the table below, Nmod and Nrf are multipliers that affect FM deviation at the measured frequency.

Fout (MHz)	Nmod	Fout (MHz)	Nrf
> 0.009 to ≤ 20	0.0625	≥ 0.009 to <31.25	0.125
> 20 to < 31.25	0.125	31.25 to ≤ 62.5	0.015625
31.25 to ≤ 40	0.0078125	> 62.5 to ≤ 125	0.03125
> 40 to ≤ 80	0.015625	> 125 to ≤ 250	0.0625
> 80 to ≤ 160	0.03125	> 250 to ≤ 500	0.125
> 160 to ≤ 320	0.0625	> 500 to ≤ 1,000	0.25
> 320 to ≤ 640	0.125	> 1,000 to ≤ 2,000	0.5
> 640 to ≤ 1,280	0.25	≥ 2,000 to ≤ 20,000	1
> 1,280 to ≤ 2,560	0.5	> 20,000 to ≤ 40,000	2
> 2,560 to ≤ 20,000	1	> 40,000 to ≤ 70,000	4
> 20,000 to ≤ 40,000	2		
> 40,000 to 70,000	4		

Frequency Modulation

Parameter	Modes	Specifications	Conditions, Int or Ext @ 1V pk AC, 0V DC, DC HPF, sinewave, except as noted
Max Deviation	Low Noise	10 MHz *Nmod (see Nmod table)	Rate = 1 kHz to lesser of (8 MHz or 0.03 *RF) RF ≥ 2 MHz
	Wide (unlocked)	100 MHz *Nrf, (typical) (see Nrf table)	Rate = 10 Hz RF ≥ 31.25 MHz With Option 6, RF ≥ 125 MHz
Min Deviation	Low Noise	640 Hz *Nmod, nominal (less if Ext FM < ±1V)	Rate = 1 kHz
	Wide (unlocked)	3.2 kHz *Nrf, nominal, (less if Ext FM < ±1V)	Rate = 10 kHz
Deviation Accuracy	Low Noise	Internal: ±2 %, External: ±3 % of indication	Rate = 1 kHz, Deviation Setting = 2 MHz *Nmod RF > 2 MHz
External Sensitivity	Low Noise	(1.28 kHz/V to 20 MHz/V) *Nmod	
	Wide (unlocked)	(3.2 kHz/V to 105 MHz/V) *Nmod	
External Sensitivity Accuracy	Low Noise	3 % nominal	Rate = 1 kHz
Flatness vs. Modulation Rate	Low Noise	± 1dB, (typical)	1 kHz to 1 MHz rate vs. 1 kHz, for RF ≥ 31.25 MHz
			Deviation setting = 2 MHz *Nmod For RF > 250 MHz
3 dB Bandwidth	Low Noise	DC to 10 MHz	vs. 1 kHz rate, DC couple, Deviation setting = 2 MHz *Nmod
	Wide (unlocked)	DC to > 500 Hz, nominal	For RF > 250 MHz
	Highpass Filter	DC, 63 Hz, 1 kHz, nominal	vs. 10 Hz rate, Deviation setting = 10 MHz *Nrf
Harmonic distortion (THD)	Low Noise	1 %	Rate = 1 kHz, 50 kHz. Deviation = 300 kHz, 50 kHz RF ≤ 160 MHz, RF > 1 MHz
			50 Hz to 15 kHz integration BW, Rate = 1 kHz, Dev = 50 kHz
Incidental AM	Low Noise	≤ 0.3 % rms	50 Hz to 15 kHz integration BW, Rate = 1 kHz, Dev = 50 kHz
Residual FM	Low Noise	≤ 3 kHz rms	50 Hz to 15 kHz integration BW, Rate = 1 kHz, Dev = 50 kHz

Phase Modulation

Parameter	Modes	Specifications	Conditions, except as noted: Int or Ext@1VpkAC, 0VDC, DC HPF, sinewave
Max Deviation	Low Noise	±[lesser of 5 rad or 7 MHz/modrate] *Nmod (see Nmod table)	DC to 7 MHz rate
	Wide Deviation	±[lesser of 640 rad or 7 MHz/modrate] *Nmod	DC to 1 MHz rate
Min Deviation	Low Noise	1 m rad at Nmod = 0.5 to 2, (< 1m rad if Ext ΦM input < 1Vpk), nominal	1 kHz rate
	Wide Deviation	0.1 rad at Nmod = 0.5 to 2, (< 0.1 rad if Ext ΦM input < 1Vpk), nominal (by design, not tested)	100 Hz rate
Deviation Accuracy	Low Noise	Internal: ±5 %, External: ±5 % of indication	1 kHz rate, Phase deviation setting = 5 rad/Nmod
	Wide Deviation	Internal: ±5 %, External: ±5 % of Indication	100 Hz rate, Phase deviation setting = 640 rad/Nmod
Ext Sensitivity	Low Noise	Nmod *6.28 rad/V to (1mrad/V for Nmod = 0.5 to 2), nominal	
	Wide Deviation	Nmod *804 rad/V to (0.1 rad/V for Nmod = 0.5 to 2), nominal	
External Sensitivity Accuracy	Low Noise	±5 %, nominal	1 kHz rate, Phase deviation setting = 5 rad/Nmod
	Wide Deviation	±5 %, nominal	100 Hz rate, Phase deviation setting = 640 rad/Nmod
Flatness vs. Modulation Rate	Low Noise	±1 dB (typical)	1 kHz to 1 MHz rate vs. 1 kHz, dev setting = 0.2 rad *Nmod
	3 dB Bandwidth		
	Low Noise	DC to 10 MHz	vs. 1 kHz rate, Phase deviation setting = 0.2 rad *Nmod
	Wide Deviation	DC to 1 MHz, nominal	vs. 100 Hz rate, Phase deviation setting = 10 rad *Nmod
	Highpass Filter	DC, 63 Hz, 1 kHz, nominal	

External FM/Phase Mod Input

Connector type	BNC
Impedance	50 Ω, nominal
Full-scale Input	± 1Vpk
Damage Level	± 5V

Pulse Modulation (Option 26) Option 26 adds Pulse modulation, driven internally or externally. Requires Option 27. External modulation is driven from a rear panel BNC connector. It can also be driven from a BNC connector on the front panel with Option 29. Pulse modulation is not available for RF < 10 MHz.

On/Off Ratio	> 80 dB (70 dB for frequencies < 2 GHz)
Minimum Leveled Pulse Width	100 ns, ≥ 2 GHz 1 μs, < 2 GHz
Minimum Unleveled Pulse Width	10 ns for 2 GHz to 20 GHz (external) 50 ns for > 20 GHz (external)
Level Accuracy Relative to CW (100 Hz to 1 MHz PRF)	±0.5 dB, ≥ 2 GHz, Pulse widths ≥ 1 μs ±1 dB, ≥ 2 GHz, Pulse widths 100ns to < 1 μs ±1 dB, < 2 GHz, Pulse widths ≥1μs
Pulse Delay	60 ns in External Mode ((typical))
PRF Range	DC to 10 MHz, unleveled 100 Hz to 5 MHz, leveled
External Input	Rear-panel BNC
Drive Level	TTL compatible input
Input Logic	Positive-true or negative-true, selectable from modulation menu

Frequency Range	Rise and Fall Time (10% to 90%)	Overshoot	Video Feedthrough
≥ 10 MHz to < 31.25 MHz	400 ns	33 %	± 70 mV
≥ 31.25 MHz to < 125 MHz	90 ns	22 %	± 130 mV
≥ 125 MHz to < 500 MHz	33 ns	11 %	± 70 mV
≥ 500 MHz to < 2000 MHz	15 ns	10 %	± 50 mV
> 2 GHz	10 ns (5 ns, typical)	10 %	± 30 mV

Modulation Hardware (Option 27)

Description	Modulation hardware that includes an internal pulse generator and two internal waveform generators, one providing a frequency or phase modulating signal and the other an amplitude modulating signal. This modulation hardware option can only be ordered in combination with either FM/ϕM, AM, or Pulse modulation Options 12 and 26, respectively.
Waveforms	Sinusoid, square, triangle, positive ramp, negative ramp, Gaussian noise, uniform noise
Rate	0.1 Hz to 10 MHz sinusoidal 0.1 Hz to 1 MHz square-wave, triangle, ramps
Resolution	0.1 Hz
Waveform Outputs	Two BNC connectors on the rear panel, FM/ϕM OUT and AM OUT
Pulse Modes	Singlet, doublet, triplet, quadruplet
Pulse Triggers	Freerun, triggered, gated, delayed, triggered with delay
Pulse Inputs/Outputs	Video pulse and sync out, rear-panel BNC connectors

Pulse Parameter

Pulse Width	10 ns to 42 s
Pulse Period	100 ns to 42 s (Period must be longer than 10 ns + sum of pulse widths and delays)
Variable Delay: Singlet	20 ns to 42 s
Doublet	20 ns to 42 s
Triplet	20 ns to 42 s
Quadruplet	20 ns to 42 s
Resolution	10 ns
Accuracy	10 ns (5 ns, (typical))

Pulse Train (Option 25)

Description	Pulse train adds ability to generate an arbitrary pulse pattern to simulate complex pulse radar signals. Up to 2048 pulse patterns or bursts can be generated with this option. Requires Option 26 and 27.
Number of pulse patterns/bursts	1 to 2047
No of pulses per burst	1 to 65535
Pulse ON/OFF period range	100 ns to (42 s)
PRF Range	0.024 Hz to 10 MHz
Resolution	10 ns
Accuracy	10 ns, (5 ns typ.)
Triggering mode	Auto, Single Step, Single Sweep, Breakpoint, Multiple Sweep
Triggering source	Single, external, external gate and time
No of Breakpoints	Up to 10

User Defined Modulation (Option 10)

User Defined Modulation option provides the ability to create arbitrary waveforms using Rubidium’s remote GUI client. Waveform created in the remote GUI client can be downloaded into the internal look-up tables of 8191 points in LF generator’s memory. The download files are in Anritsu proprietary wfm format containing integer numbers between 0 and 16383, where 0 corresponds to the minimum modulation level and 4095 the maximum. The arbitrary waveforms can be used for AM, FM/PM modulation. Alternatively, they can also be made available at the rear panel for external use.

In addition to the capability of creating and generating arbitrary waveforms, user defined modulation option enables Rubidium to synchronize between FM modulation and Pulse modulation. The synchronization between FM and Pulse modulation enables generation of linear and non linear chirp signals. Requires Option 12, 26 and 27.

Millimeter-wave Frequency Coverage

Millimeter-wave Multiplier 2000-2087-R Through 2000-2098-R Series


2000-2087-R through 2000-2098-R series of waveguide output multipliers are available for banded frequency coverage from 50 GHz (WR15) to 1.1 THz (WR1.0). These modules offer high test port power, voltage-controlled RF attenuation, and TTL controlled ON/OFF modulation rates to a few kHz as standard. The frequency multiplier modules are intended to be used in CW mode and do not preserve AM.



Frequency multiplier modules have two multipliers that can be configured to allow input signals in two frequency bands:


- Low frequency input for < 20 GHz and 10 dBm input level

In this configuration the RF output from Rubidium is input into the K(f) input port on the rear panel of the multiplier module. The port is designated as RF(L). The low frequency band input configuration uses both N_1 and N_2 multipliers, as shown below.

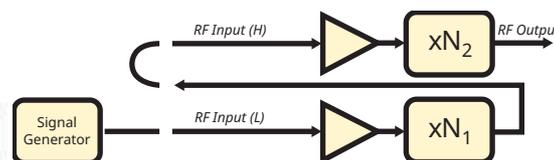

- High frequency input for < 50 GHz and 0 dBm input level

In this configuration the RF output from Rubidium is input into the 2.4 mm(f) input port on the rear panel of the multiplier module. The port is designated as RF(H). The high frequency band input configuration uses an N_2 multiplier, as shown below. This results in a lower multiplication factor and reduces unwanted subharmonic signals within the band.

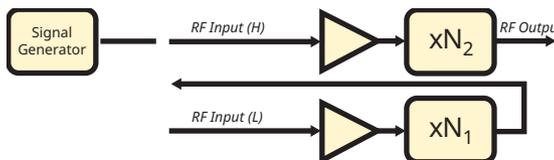

General Specifications

Parameter	Description	Specification	Connector
RF Input ^{a, b}	Low Frequency (typical / damage)	10 dBm ± 3dB / 16 dBm	2.92 mm(f)
	High Frequency (typical / damage)	0 dBm ± 3dB / 6 dBm	2.4 mm(f)
RF Output	VDI Precision Flange		UG-387/U-M
AC Inputs ^c	Single-Volt Power Supply (+9 V/4 A)	100 to 240 VAC, 3.5 A, 50 to 60 Hz	U.S. or E.U.
RF Power Control	User Controlled Attenuation (UCA)	0 V-off, 5 V-full power	BNC (f)
Voltage Bias Port	For Use with External Components	+9 V	LEMO 00
Operating Temperature	Typical / Recommended	25°C / 20-30°C	
Maximum Weight	-	2.0 lb (0.91 kg)	
Dimensions	Typical (Length x Width x Height)	5.00 x 3.50 x 1.50 inches	

- a. For low frequency input operation a K(f) to K(m) RF cable is included as standard.
- b. For high frequency band input operation, a 34VFKF50A V(f) to K(f) adapter and a V120mm RF cable are required and must be ordered separately. The 34VFKF50A adapter is used at Rubidium output to convert to a V(f). This is then connected to 2.4mm (f) input port of multiplier module with a V120MM RF cable.
- c. It is recommended to turn the power ON only after all connections to the multiplier are made, such as RF input, AC inputs, and DC inputs. When turning power OFF, it is recommended to turn OFF the RF input from signal generator first, and then turn OFF/disconnect all other inputs and outputs of the multiplier.

Performance Specification


Parameter	Multiplier Model ^{a, b, c}					
	2000-2087-R	2000-2088-R	2000-2089-R	2000-2090-R	2000-2091-R	2000-2092-R
Frequency Band (GHz)	WR -15	WR-12	WR-10	WR-8.0	WR-6.5	WR-5.1
Output Frequency ^{d, e}	50 GHz to 75 GHz	60 GHz to 90 GHz	75 GHz to 110 GHz	90 GHz to 140 GHz	110 GHz to 170 GHz	140 GHz to 220 GHz
Output Power (dBm (typical)/ Minimum)	20 / 17	20 / 17	20 / 17	19 / 13	18 / 15	10 / 6
Multiplier Factors (Low/High Frequency)	6 / 3	6 / 3	6 / 3	12/6	12/6	12/6
RF input - Low Frequency	8.33 GHz to 12.5 GHz	10 GHz to 15 GHz	12.5 GHz to 18.33 GHz	7.5 GHz to 11.66 GHz	9.166 GHz to 14.166 GHz	11.66 GHz to 18.33 GHz
RF input - High Frequency	16.66 GHz to 25 GHz	20 GHz to 30 GHz	25 GHz to 36.66 GHz	15 GHz to 23.33 GHz	18.33 GHz to 28.33 GHz	23.33 GHz to 36.66 GHz

Parameter	Multiplier Model ^{a, b, c}					
	2000-2093-R	2000-2094-R	2000-2095-R	2000-2096-R	2000-2097-R	2000-2098-R
Frequency Band (GHz)	WR-4.3	WR-3.4	WR-2.8 (WM-710)	WR-2.2 (WM-570)	WR-1.5 (WM-380)	WR-1.0 (WM-250)
Output Frequency ^{d, e}	170 GHz to 260 GHz	220 GHz to 330 GHz	260 GHz to 400 GHz	330 GHz to 500 GHz	500 GHz to 750 GHz	750 GHz to 1100 GHz
Output Power (dBm (typical)/ Minimum)	8 / 3	6 / 3	5 / -1	0 / -6	-7 / -13	-16 / -26
Multiplier Factors (Low/High Frequency)	18 / 6	18 / 9	27 / 9	36 / 18	54 / 18	81 / 27
RF input - Low Frequency	9.44 GHz to 14.44 GHz	12.22 GHz to 18.33 GHz	9.62 GHz to 14.81 GHz	9.16 GHz to 13.88 GHz	9.25 GHz to 13.88 GHz	9.25 GHz to 13.58 GHz
RF input - High Frequency	28.33 GHz to 43.33 GHz	24.44 GHz to 36.66 GHz	28.88 GHz to 44.44 GHz	18.33 GHz to 27.77 GHz	27.77 GHz to 41.66 GHz	27.77 GHz to 40.74 GHz

- a. These millimeter-wave modules are produced by VDI Inc. located in Charlottesville, VA. For detailed and up-to-date specifications, please call VDI, Inc. or visit their website at <http://www.vadiodes.com>.
- b. Multipliers require power from an external power supply (+9 VDC, 4 A typical). The power supply adapter is a standard accessory and included with modules.
- c. Warranty period for 2000-2087-R through 2000-2098-R multiplier modules is one year.
- d. Unwanted harmonic content is better than -20 dBc (typical).
- e. Frequency stability of input is degraded at the output by multiplier factor N (N1 x N2) and phase noise by 20log(N). For high frequency operation N1 = 1.

Output Attenuation

Frequency multiplier modules offer voltage-controlled RF output attenuation capability as standard. Users can input 0 to 5 V a DC voltage from an external source into the BNC connector on the rear panel designated as UCA. The output power can be varied from 90% to 10% through the UCA port. A sample curve of UCA control voltage vs. output power is shown below. The curve is subject to some variation due to measurement conditions, such as temperature and load impedance, and should be considered as representative only.

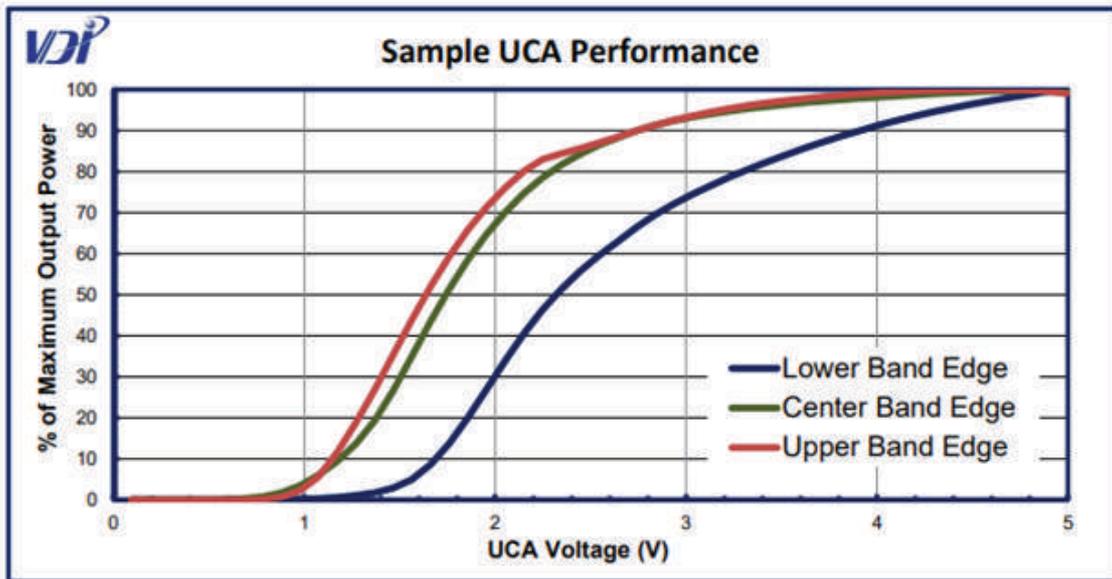

General

Calibration Cycle	Recommended calibration cycle is 2 years from the date of shipment (standard warranty). All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com
Stored Setups	Stores front panel settings in user file system with named set up files. The location of set up files can be internal memory or external pluggable memory. The number of set up files is only limited by memory size. Whenever the instrument is turned on, control settings come on at the same functions and values existing when the instrument was turned off.
Self Test	Instrument self-test is performed when Self-Test under diagnostics in the sandwich menu is selected. If an error is detected, an error message is displayed in a window on the touch screen identifying the probable cause.
Parameter Entry	Instrument-controlled parameters can be entered in multiple ways: touchscreen, keypad, rotary data knob, or the touch pads of the cursor-control key. Keypad entries are terminated by pressing the appropriate key or touchscreen. Edits are terminated by exiting the edit menu.
Reset	Returns all instrument parameters to predefined default states or values. Any pending GPIB or Ethernet I/O is aborted. Selectable from the system menu Five user tables are available with up to 65535 points/table.
Warm Up Time	From Standby: 30 minutes From Cold Start (0 °C): 120 hours to achieve specified frequency stability with aging. Instruments disconnected from AC line power for more than 72 hours require 30 days to return to specified frequency stability with aging.
Power	90 VAC to 264 VAC, 47 Hz to 63 Hz, 350 VA maximum
Standby	With AC line power connected, unit is placed in standby
Weight	20.5 kg
Dimensions (WxHxD)	483 mm x 133 mm x 552 mm
Warranty	3 years from shipment date

Remote Operation

Description	All instrument functions, settings, and operating modes (except for power on/standby) are controllable using commands sent from an external computer via sockets over Ethernet, or GPIB (IEEE-488 interface bus). Note: For users who wish to use a USB control interface, the following USB adapter, available from National Instruments is recommended: NI GPIB-USB-HS		
Ethernet Port	1000 Base-T (Gbit Ethernet)		
Ethernet Address	DHCP or static IP		
Commands	SCPI, Native (MG369xC compatible proprietary command set)		
GPIB Address	Selectable from a system menu		
IEEE -488 Interface Function Subset	Source Handshake: SH1	Service Request: SR1	Device Trigger: DT1
	Acceptor Handshake: AH1	Remote/Local: RL1	Controller Capability: C0, C1, C2, C3, C28
	Talker: T6	Parallel Poll: PP1	Tri-State Driver: E2
	Listener: L4	Device Clear: DC1	
Remote Lockout	While operating on the GPIB, all instrument front panel keys are locked.		
Backward Compatibility	The instrument responds to the published native (Anritsu proprietary) commands and responses of the Anritsu Models 6600, 6700, 6XX00, and MG3690 series signal sources.		
HiSLIP	Support available		

Environmental (MIL-PRF-28800F, class 3)

Storage Temperature Range	-40 °C to +75 °C
Operating Temperature Range	0 °C to +50 °C
Relative Humidity	5 % to 95 % at 40 °C (non-condensing)
Altitude	4,600 m, 43.9 cm-Hg
Vibration	Random, 5 Hz to 500 Hz, 0.015 to 0.0039 g ² /Hz PSD; Sinusoidal, 5 Hz to 55 Hz, 0.33 mm displacement

Regulatory Compliance


European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS directives 2011/65/EU and 2015/863
United Kingdom	EMC SI 2016/1091; BS EN 55011 & BS EN 61000-4-2/3/4/5/6/8/11 Consumer Protection (Safety) SI 2016/1101; BS EN 61010-1:2010 Environmental Protection SI 2012/3032; 2011/65/EU & 2015/863
Canada	ICES-1(A)/NMB-1(A)
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	R-R-A2J-1004

Rear Panel



Rear Panel Connectors (may be present but not active if option is not ordered)

Aux1 I/O Pin Descriptions

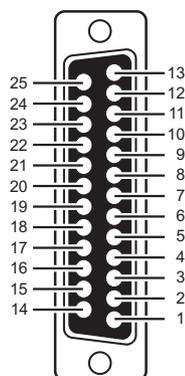

Pin	Description	Pin	Description
1	Horizontal Output	14	V/GHz Output
2	Chassis Ground	15	N/C
3	Sequential Sync Output	16	N/C
4	N/C	17	N/C
5	N/C	18	Sweep Dwell Input
6	Retrace Blanking Output	19	N/C
7	N/C	20	Bandswitch Blanking Output
8	Chassis Ground	21	N/C
9	N/C	22	N/C
10	Sweep Dwell Output	23	N/C
11	Lock Status Output	24	Chassis Ground
12	N/C	25	N/C
13	N/C		

Inputs and Outputs

Inputs and Outputs	Description
AM OUT	Provides the amplitude modulation waveform from the internal LF generator. Enabled with Option 27. BNC type, rear panel.
HORIZ OUT	Requires Option 6 (available for MG36221A only). Horizontal Sweep Output provides a 0V at beginning and +10 V at end of sweep for all sweep modes, regardless of sweep width. In CW mode, the voltage is proportional to frequency between 0 V at low end and +10V at the high end of range. In CW mode, if CW Ramp is enabled, a repetitive 0V to +10V ramp is provided. The ramp speed is adjusted by the Sweep Time function. BNC type, rear panel.
PULSE OUT	Provides a video modulating signal from the internal pulse generator. Enabled with Option 27. BNC type, rear panel.
FM OUT	Provides the frequency or phase modulation waveform from the internal LF generator. Enabled with Option 27. BNC type, rear panel.
PULSE SYNC	Provides a TTL compatible signal, synchronized to the internal pulse modulation output. Enabled with Option 26. BNC type, rear panel.
LOCKED/LEVELLED	TTL high/low output signal when in internal ALC mode that is a logical AND of frequency locked condition and output leveled condition. When in Fixed Gain mode this signal indicates only frequency locked/unlocked condition. BNC type, rear panel.
PPS	1PPS input/output from either GNSS/GPS atomic clock receiver or internal rubidium reference option. 3.3V CMOS I/O. BNC type, rear panel.
FM IN	Accepts an external signal to frequency or phase modulate the RF output signal. Enabled with Option 12. 50 Ω impedance. BNC type, rear panel.
EXT ALC	Provides for leveling the RF output signal externally with either a detector or power meter. Signal requirements are shown in the RF Output specifications. BNC type, rear panel.
EFC	±4 VDC 30 Hz bandwidth in wide reference PLL mode 1 MEG Ohm input impedance. Provides the capability to frequency modulate the internal crystal oscillator, allowing phase locking of the synthesizer inside an external lock loop. BNC type, rear panel.
AM IN	Accepts an external signal to amplitude modulate the RF output signal. Enabled with Option 12. 50 Ω impedance. BNC type, rear panel.
10 MHZ REF IN	Accepts an external 10 MHz ± 3 Hz, 0 dBm to +10 dBm (20 dBm no-damage level) time-base signal. Automatically disconnects the internal high-stability time-base option, if connected. 50 Ω impedance BNC type, rear panel.
10 MHZ REF OUT	Provides a 10 dBm, AC coupled, signal derived from the internal frequency standard. 50 Ω impedance BNC type, rear panel.
PULSE IN	Accepts an external TTL compatible signal to pulse modulate the RF output signal or to trigger or to gate the optional internal pulse generator. Enabled with Option 26. BNC type, rear panel.
100 MHZ REF IN	Accepts an external 100 MHz ± 200 Hz or 2 ppm 12 ± 1 dBm (20 dBm no-damage level) reference signal. Enabled with Option 3 or 13. Automatically disconnects the internal high-stability time-base option, if connected. 50 Ω impedance BNC type, rear panel.
100 MHZ REF OUT	Provides a 12 dBm, AC coupled, 100 MHz signal derived from the internal frequency standard. Enabled with Option 3 or 13. 50 Ω impedance BNC type, rear panel.

Rear Panel Connectors (continued)

1600 MHz REF IN	Accepts an external 1600 MHz \pm 3.2 kHz or 2 ppm, 4 \pm 1 dBm (20 dBm no-damage level) reference signal. Enabled with Option 3 or 13. Automatically disconnects the internal high-stability time-base option, if connected. 50 Ω impedance SMA type, rear panel.
1600 MHz OUT	Provides a 5 dBm, AC coupled, 1600 MHz signal derived from the internal frequency standard. Enabled with Option 3 or 13. 50 Ω impedance SMA type, rear panel.
GPS	Accepts GNSS/GPS antenna input. Requires Option 66.
RF OUTPUT	Provides for RF output from 50 Ω source impedance. Option 9 moves the RF Output connector from the front to the rear panel. K Connector (male) fmax \leq 43.5 GHz. V Connector (male) fmax 70 GHz.
ETHERNET (1000 Base-T)	Provides input/output connections for a Gigabit Ethernet interface. Accepts RJ45 type connectors, rear panel.
GPIOB (IEEE-488)	Provides input/output connections for the General Purpose Interface Bus.
USB	Two USB 3.0 Type-A for peripherals such as memory device.
SD CARD	Accepts an external SDIO memory card.
AC POWER INPUT	AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 Hz to 63 Hz.
AUX 1	Future capability
AUX 2	Future capability

Ordering Information

MG36221A Options

MG36221A-0001	Option 1, Rack Mount with Slides (Cannot be ordered with Option 11)
MG36221A-0002	Option 2, Mechanical Step Attenuator, 110 dB
MG36221A-0003	Option 3, Low Phase Noise and High Stability
MG36221A-0006	Option 6, Analog Sweep, Frequency
MG36221A-0009	Option 9, Rear Panel K(m)-Connector RF Output
MG36221A-0010	Option 10, User Defined Modulation (Requires Option 12, 26 and 27)
MG36221A-0011	Option 11, Rack Mount without Slides (Shelf Mount)
MG36221A-0012	Option 12, Amplitude, Frequency, and Phase Modulation, Internal/External (Requires Option 27)
MG36221A-0013	Option 13, Ultra Low Phase Noise (Requires Option 3)
MG36221A-0015	Option 15, High Power Output
MG36221A-0018	Option 18, On-site User Level Calibration (Requires accessory kit 2000-2166-R, and MA24330A or MA24350A USB power sensor, each sold separately)
MG36221A-0023	Option 23, Premium Phase Noise, CW (Requires Option 3 and 13)
MG36221A-0025	Option 25, Pulse Train Modulation (Requires Option 26 and 27)
MG36221A-0026	Option 26, Pulse Modulation, Internal/External (Requires Option 27)
MG36221A-0027	Option 27, Modulation Hardware (Requires Option 12 or 26, or both for functionality)
MG36221A-0029	Option 29, Front Panel Modulation Input Output Access (Option 27 required when ordering Option 12 or 26, or both)
MG36221A-0030	Option 30, 600 Ohms External AM/FM Input Impedance (Requires Option 12 and 27)
MG36221A-0033	Option 33, Phase Noise, Export Option (Cannot be ordered with Options 3, 13, 23 and 56)
MG36221A-0037	Option 37, Removable SDIO memory
MG36221A-0056	Option 56, Ultra Stability Time Base (Requires Option 3 or 13)
MG36221A-0066	Option 66, GNSS Atomic Clock Receiver (Requires Option 3 or 13)
MG36221A-0097	Accredited Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data
MG36221A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate
MG36221A-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data

MG36241A Options

MG36241A-0001	Option 1, Rack Mount with Slides (Cannot be ordered with Option 11)
MG36241A-0002	Option 2, Mechanical Step Attenuator, 110 dB
MG36241A-0003	Option 3, Low Phase Noise and High Stability
MG36241A-0006	Option 6, Analog Sweep, Frequency
MG36241A-0009	Option 9, Rear Panel K(m)-Connector RF Output
MG36241A-0010	Option 10, User Defined Modulation (Requires Option 12, 26 and 27)
MG36241A-0011	Option 11, Rack Mount without Slides (Shelf Mount)
MG36241A-0012	Option 12, Amplitude, Frequency, and Phase Modulation, Internal/External (Requires Option 27)
MG36241A-0013	Option 13, Ultra Low Phase Noise (Requires Option 3)
MG36241A-0015	Option 15, High Power Output
MG36241A-0018	Option 18, On-site User Level Calibration (Requires accessory kit 2000-2166-R and MA24350A USB power sensor, each sold separately)
MG36241A-0025	Option 25, Pulse Train Modulation (Requires Option 26 and 27)
MG36241A-0026	Option 26, Pulse Modulation, Internal/External (Requires Option 27)
MG36241A-0027	Option 27, Modulation Hardware (Requires Option 12 or 26, or both for functionality)
MG36241A-0029	Option 29, Front Panel Modulation Input Output Access (Option 27 required when ordering Option 12 or 26, or both)
MG36241A-0030	Option 30, 600 Ohms External AM/FM Input Impedance (Requires Option 12 and 27)
MG36241A-0033	Option 33, Phase Noise, Export Option (Cannot be ordered with Options 3, 13, and 56)
MG36241A-0037	Option 37, Removable SDIO memory
MG36241A-0056	Option 56, Ultra Stability Time Base (Requires Option 3 or 13)
MG36241A-0066	Option 66, GNSS Atomic Clock Receiver (Requires Option 3 or 13)
MG36241A-0097	Accredited Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data
MG36241A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate
MG36241A-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data

MG36271A Options

MG36271A-0001	Option 1, Rack Mount with Slides (Cannot be ordered with Option 11)
MG36271A-0002	Option 2, Mechanical Step Attenuator, 90 dB
MG36271A-0003	Option 3, Low Phase Noise and High Stability
MG36271A-0010	Option 10, User Defined Modulation (Requires Option 12, 26 and 27)
MG36271A-0011	Option 11, Rack Mount without Slides (Shelf Mount)
MG36271A-0012	Option 12, Amplitude, Frequency, and Phase Modulation, Internal/External (Requires Option 27)
MG36271A-0013	Option 13, Ultra Low Phase Noise (Requires Option 3)
MG36271A-0015	Option 15, High Power Output
MG36271A-0025	Option 25, Pulse Train Modulation (Requires Option 26 and 27)
MG36271A-0026	Option 26, Pulse Modulation, Internal/External (Requires Option 27)
MG36271A-0027	Option 27, Modulation Hardware (Requires Option 12 or 26, or both for functionality)
MG36271A-0029	Option 29, Front Panel Modulation Input Output Access (Option 27 required when ordering Option 12 or 26 or both)
MG36271A-0030	Option 30, 600 Ohms External AM/FM Input Impedance (Requires Option 12 and 27)
MG36271A-0033	Option 33, Phase Noise, Export Option (Cannot be ordered with Options 3, 13, and 56)
MG36271A-0037	Option 37, Removable SDIO memory
MG36271A-0056	Option 56, Ultra Stability Time Base (Requires Option 3 or 13)
MG36271A-0066	Option 66, GNSS Atomic Clock Receiver (Requires Option 3 or 13)
MG36271A-0097	Accredited Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data
MG36271A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate
MG36271A-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data

Standard Accessories (included)

11410-00976	Getting Started with Anritsu Products and Services Flier.
2000-1732-R	CAT-7 shielded, twisted-pair, Ethernet cable, 10 ft.
Miscellaneous	Power cord with plug-type and rating determined by destination country. 3-year Factory Warranty Options and Accessories.

Upgrades

Economical upgrades are available to upgrade any model to any higher performing model. Consult Anritsu for details.

MG362x1A Option Configuration Matrix

Models	Options											
	1 ^a	2	3	6	9	10 ^b	11 ^a	12 ^c	13 ^d	15	18	23 ^e
MG36221A	X	X	X	X	X	X	X	X	X	X	X	X
MG36241A	X	X	X	X	X	X	X	X	X	X	X	
MG36271A	X	X	X		X	X	X	X	X	X		
	25 ^f	26 ^c	27 ^g	29 ^h	30 ⁱ	33 ^j	37	56 ^k	66 ^l	97	98	99
MG36221A	X	X	X	X	X	X	X	X	X	X	X	X
MG36241A	X	X	X	X	X	X	X	X	X	X	X	X
MG36271A	X	X	X	X	X	X	X	X	X	X	X	X

- a. Options 1 and 11 cannot be ordered together
- b. Must be ordered with options 12, 26 and 27
- c. Requires Option 27 (Modulation Hardware)
- d. Must be ordered with Option 3
- e. Must be ordered with Option 3 and 13
- f. Must be ordered with options 26 and 27
- g. Requires Option 12 or 26, or both for functionality
- h. Requires Option 27
- i. Must be ordered with option 12 and 27
- j. Cannot be ordered with Options 3, 13, 23, and 56
- k. Must be ordered with Option 3 or 13

USB Power Sensors

Accessory	Description
	MA24330A USB Power Sensor, CW Avg, 10 MHz to 33 GHz USB Power Sensor, 10 MHz, -70 dBm to +20 dBm.
	MA24340A USB Power Sensor, CW Avg, 10 MHz to 40 GHz USB Power Sensor, 10 MHz, -70 dBm to +20 dBm.

Accessory	Description
	MA24350A USB Power Sensor, CW Avg, 10 MHz to 50 GHz USB Power Sensor, 10 MHz, -70 dBm to +20 dBm.

Transit Case

Accessory	Description
	760-297-R Transit case (16 kg, 79.4 cm x 61.5 cm x 44.4 cm, roll-away on four wheels)

Accessory	Description
-----------	-------------

Accessories

Accessory	Description
	2000-2166-R MG36221A/41A Opt 18 kit includes: 110-145-R, DC to 43.5 GHz, 50 Ω, 5W, K(f) to K(m) attenuator 33KFKF50C, DC to 43.5 GHz, 50 Ω, K(f) to K(f) adapter (Use with the MG36221A) 34VFKF50A, DC to 43.5 GHz, 50 Ω, V(f) to K(f) adapter (Use with the MG36241A)
	01-200 Calibrated Torque End Wrench, GPC-7 and Type N
	01-201 Torque End Wrench, 5/16 in, 0.9 N.m (8 lbf-in) (for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors)

Accessory	Description
	01-203 Torque End Wrench, 13/16 in, 0.9 N.m (8 lbf-in) (for tightening ruggedized SMA, 2.4 mm, K and V test port connectors)
	01-204 End Wrench, 5/16 in, Universal, Circular, Open-ended (for SMA, 3.5 mm, 2.4 mm, K, and V connectors)

Coaxial Adapters

Accessory	Description
	34NK50 Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω
	34NKF50 Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
	34NFK50 Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
	34NFKF50 Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω
	34VFKF50A DC to 43.5 GHz, 50 Ω, V(f)-K(f)

Accessory	Description
	34VFK50A DC to 43.5 GHz, V(f) to K(m), 50 Ω
	34VFKF50A DC to 43.5 GHz, V(f) to K(f), 50 Ω
	34VKF50A Precision Adapter, V(m) to K(f), DC to 43.5 GHz, 50 Ω
	34VK50A Precision Adapter, V(m) to K(m), DC to 43.5 GHz, 50 Ω

Optional Accessories

Adapters Accessory	Description	Accessory	Description
	1091-26-R SMA(m) to N(m), DC to 18 GHz, 50 Ω		510-102-R N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle
	1091-27-R SMA(f) to N(m), DC to 18 GHz, 50 Ω		510-90-R 7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω
	1091-80-R SMA(m) to N(f), DC to 18 GHz, 50 Ω		510-91-R 7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω
	1091-81-R SMA(f) to N(f), DC to 18 GHz, 50 Ω		510-92-R 7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω
	1091-172-R BNC(f) to N(m), DC to 1.3 GHz, 50 Ω		510-93-R 7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω
	1091-315-R DC to 18 GHz, TNC(m) to N(f), 50 Ω		510-96-R 7/16 DIN(m) to 7/16 DIN(m), DC to 7.5 GHz, 50 Ω
	1091-317-R DC to 18 GHz, TNC(m) to SMA(f), 50 Ω		510-97-R 7/16 DIN(f) to 7/16 DIN(f), DC to 7.5 GHz, 50 Ω
	1091-318-R DC to 18 GHz, TNC(m) to SMA(m), 50 Ω		1091-318-R DC to 18 GHz, TNC(m) to SMA(m), 50 Ω
	1091-323-R DC to 18 GHz, TNC(m) to TNC(f), 50 Ω		1091-324-R DC to 18 GHz, TNC(f) to N(m), 50 Ω
	1091-325-R DC to 18 GHz, TNC(m) to N(m), 50 Ω		1091-326-R DC to 8 GHz, TNC(m) to TNC(m), 50 Ω
	1091-465-R DC to 6 GHz, 4.3-10(f) to N(f), 50 Ω		1091-467-R DC to 6 GHz, 4.3-10(m) to N(f), 50 Ω
	71693-R DC to 18 GHz, Ruggedized adapter, K(f) - N(f), 50 Ω		33KK50C Calibration Grade Adapter, K(m) to K(m), DC to 43.5 GHz, 50 Ω
			33KKF50C Calibration Grade Adapter, K(m) to K(f), DC to 43.5 GHz, 50 Ω
			33KFK50C Calibration Grade Adapter, K(f) to K(f), DC to 43.5 GHz, 50 Ω

Precision Adapters

Accessory	Description
	34NN50A N(m) to N(m), DC to 18 GHz, 50 Ω
	K220B DC to 40 GHz, K(m) to K(m), 50 Ω
	K224B DC to 40 GHz, K(m) to K(f), 50 Ω

Accessory	Description
	34NFnF50 N(f) to N(f), DC to 18 GHz, 50 Ω
	K222B DC to 40 GHz, K(f) to K(f), 50 Ω

Coaxial Adapters

Accessory	Description
	34VV50 DC to 65 GHz, V(m) to V(m), 50 Ω
	34VVF50 DC to 65 GHz, V(f) to V(m), 50 Ω
	34VVFV50 DC to 65 GHz, V(f) to V(f), 50 Ω

Accessory	Description
	2000-1880-R DC to 18 GHz, N(m) to V(f), 50 Ω
	2000-1881-R DC to 18 GHz, N(f) to V(f), 50 Ω

Attenuators (up to 18 GHz)

Accessory	Description
	1010-121-R 40 dB, 100 W, D to 18 GHz, N(f) to N(m), Uni-directional
	3-1010-122 20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
	3-1010-123 30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
	3-1010-124 40 dB, 100 W, DC to 8.5 GHz, N(f) to N(m), Uni-directional

Accessory	Description
	42N50-20 20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
	42N50A-30 30 dB, 50 W, DC to 18 GHz, N(m) to N(f)
	1010-127-R 30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
	1010-128-R 40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

**Need
Image**

ANO 62-0502-20
Attenuator 1.85mm Female to 1.85mm Female, 5W Bi
Directional, DC - 67 GHz

Technical Data

Rubidium Signal Generator

Fixed Attenuators		Accessory	
Accessory	Description	Accessory	Description
	41KB-3 Precision, K(m) to K(f), 3 dB, DC to 26.5 GHz, 50 Ω		41VA-3 DC to 70 GHz, 1W, 3 dB, V(m) to V(f)
	41KB-6 Precision, K(m) to K(f), 6 dB, DC to 26.5 GHz, 50 Ω		41VA-6 DC to 70 GHz, 1W, 6 dB, V(m) to V(f)
	41KB-10 Precision, K(m) to K(f), 10 dB, DC to 26.5 GHz, 50 Ω		41VA-10 DC to 70 GHz, 1W, 10 dB, V(m) to V(f)
	41KB-20 Precision, K(m) to K(f), 20 dB, DC to 26.5 GHz, 50 Ω		41VA-20 DC to 70 GHz, 1W, 20 dB, V(m) to V(f)
	41KC-3 Precision, K(m) to K(f), 3 dB, DC to 40 GHz, 50 Ω		43KC-3 DC to 26.5 GHz, 1W, 3 dB, K(m) to K(f)
	41KC-6 Precision, K(m) to K(f), 6 dB, DC to 40 GHz, 50 Ω		43KC-6 DC to 26.5 GHz, 1W, 6 dB, K(m) to K(f)
	41KC-10 Precision, K(m) to K(f), 10 dB, DC to 40 GHz, 50 Ω		43KC-10 DC to 26.5 GHz, 1W, 10 dB, K(m) to K(f)
	41KC-20 Precision, K(m) to K(f), 20 dB, DC to 40 GHz, 50 Ω		43KC-20 DC to 26.5 GHz, 1W, 20 dB, K(m) to K(f)

Test Port Cables, Flexible, Ruggedized, Phase Stable

Accessory	Description
	N120-6 RF Cables, Semi-Rigid, 0.01 to 18 GHz, N(m) to N(m), 15 cm (5.9 in), 50 Ω, 1 each
	NS120MF-6 RF Cables, Semi-Rigid, 0.01 to 18 GHz, N(f) to N(f), 15 cm (5.9 in), 50 Ω, 1 each
	15NNF50-1.0B Test Port Cable, Flexible, Phase Stable, DC to 18 GHz, N(m) to N(f), 1.0 m (39 in), 50 Ω
	15NNF50-1.5B Test Port Cable, Flexible, Phase Stable, DC to 18 GHz, N(m) to N(f), 1.5 m (59 in), 50 Ω
	15NN50-1.0B Test Port Cable, Flexible, Phase Stable, DC to 18 GHz, N(m) to N(m), 1.0 m (39 in), 50 Ω
	15LLF50-1.0A Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m (39 in), 50 Ω
	15KKF50-1.0A Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m (39 in), 50 Ω
	3671KFS50-60 Test Port Cable, Flexible, Phase Stable, DC to 26.5 GHz, K(f) to 3.5 mm (m), 63.5 cm (25 in), 50 Ω

Accessory	Description
	3671KFK50-60 Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(m), 63.5 cm (25 in), 50 Ω
	3671KFKF50-60 Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(f), 63.5 cm (25 in), 50 Ω
	3671KFK50-100 Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(m), 1 m (38 in), 50 Ω
	806-206-R Cable, Flexible, Phase Stable, DC to 70 GHz, V(m) to V(f), 61 cm (24 in), 50 Ω
	806-209-R Cable, Flexible, Phase Stable, DC to 70 GHz, V(m) to V(f) 91.5 cm (36 in), 50 Ω
	806-304-R Cable, Flexible, Phase Stable, DC to 40 GHz, K(m) to K(f), 91.5 cm (36 in), 50 Ω
	806-396-R Cable, Flexible, Low Loss, Phase Stable, DC to 70 GHz, V(m) to V(f), 91.5 cm (36 in), 50 Ω

Phase Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)

Accessory	Description
	3670K50A-1 0.3 m (12 in), DC to 40 GHz, K(f) to K(m), 50 Ω
	3670K50A-2 0.6 m (24 in), DC to 40 GHz, K(f) to K(m), 50 Ω
	3670NN50-1 0.3 m (12 in), DC to 18 GHz, N(m) to N(m), 50 Ω
	3670NN50-2 0.6 m (24 in), DC to 18 GHz, N(m) to N(m), 50 Ω

Accessory	Description
	3670N50-1 0.3 m (12 in), DC to 18 GHz, N(f) to N(m), 50 Ω
	3670N50-2 0.6 m (24 in), DC to 18 GHz, N(f) to N(m), 50 Ω

Notes

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Americas Sales Company
450 Century Parkway, Suite 190,
Allen, TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.
Americas Sales and Support
450 Century Parkway, Suite 190,
Allen, TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Brazil

Anritsu Elettronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada, Mexico, Ciudad de Mexico,
11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Ltd.
200 Capability Green,
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711
List Revision Date: 20230901

• Sweden

Anritsu AB
Kistagångan 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• Denmark

Anritsu A/S
c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Spain

Anritsu EMEA Ltd.
Representation Office in Spain
Paseo de la Castellana, 141.
Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• Austria

Anritsu EMEA GmbH
Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• United Arab Emirates

Anritsu EMEA Ltd.
Anritsu A/S
Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• India

Anritsu India Private Limited
6th Floor, Indigube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road,
Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.
1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre
Singapore 159303
Phone: +65-6282-2400
Fax: +65-6282-2533

• Vietnam

Anritsu Company Limited
16th Floor, Peakview Tower, 36 Hoang Cau Street,
O Cho Dua Ward, Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.
Room 2701-2705, Tower A, New Caohejing
International Business Center No. 391 Gui Ping Road
Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.
Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Ltd.
8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,
Gyeonggi-do, 13840, Republic of Korea
Phone: +82-2-6259-7300
Fax: +82-2-6259-7301

• Australia

Anritsu Pty. Ltd.
Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.
7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817