

Multichannel Optical Component Analyzer

OCA-1000

The OCA-1000 is a multi-channel optical component analyzer capable of performing simultaneous insertion loss (IL), polarization dependent loss (PDL), and Power (P) measurements on multiple optical paths. The measurement is based on Mueller Matrix method, which offers fast characterization of wavelength dependent optical parameters that are critical in today's optical communication systems. The base model can have up to 8 channels, and the system is expandable to additional sets of channels for maximum flexibility.



The instrument comes with a user-friendly control program with built-in functions to display measured power, IL, and PDL vs. wavelength or to monitor time variation of power/IL for all channels simultaneously to determine their stability performance. Other functions available after post processing the data which calculate the isolation between wavelength channels (adjacent and distant), pass band center frequency, bandwidth, and ripple as well as noise floor.

This OCA-1000 is an ideal solution for easy, accurate characterization of components and modules of multiple outputs, including DWDMs, ROADMs, AWGs and PLCs. It can be used with various tunable lasers, such as those from Keysight or Santec. This flexibility offers the user the opportunity to make full use of his/her laser resources and reduce the cost of making such measurements. Its fast measurement speed reduces the time for the characterizations of devices with large number of ports and increases the production throughput.

Specifications:

Number of channels	8 channels in base unit; Can be expanded to more channels
Wavelength range	1260 ~ 1360 nm (O-band), and 1480 ~ 1620 nm (C + L bands)
Optical power range ¹	-60dBm to +8 dBm
Optical power accuracy ¹	± 0.5 dB
Optical power variation for different channels ¹	± 0.1 dB
Integration time of power meter	0.5 ~ 1000 ms
PDL measurement range ²	0 ~ 20 dB
PDL measurement uncertainty ²	± (0.02 + 2% of PDL) dB @PDL<10dB ± (0.02 + 5% of PDL) dB @10<PDL<20dB
PDL resolution	0.01 dB
PDL repeatability ²	± 0.02 dB
IL measurement range ³	0 to 60 dB (single point or stepped wavelength sweep mode) 0 to 55 dB (continuous wavelength sweep mode)
IL measurement uncertainty ³	± (0.01 + IL × 0.5%) dB
IL resolution	0.002 dB
IL repeatability ²	± 0.005 dB
Sweep period of 6-state PDL/IL measurement (typ.)	(2+ wavelength sweep range (nm)/40) × 6 seconds when laser sweep speed is 40 nm/s
Communication	USB (USB 2.0), GPIB (IEEE 488.2)
Operating temperature	10 ~ 40 °C
Storage temperature	-20 ~ 60 °C
Operating humidity	< 80 %, non-condensing
Mechanical Dimensions (One unit)	1U 19" rack mountable enclosure, 12" depth

Note:

1. At 23 ± 5 °C.
2. With DUT input power > -10dBm, DUT IL < 20dB, and integration time = 10ms.
3. With DUT input power > 5dBm, integration time = 100ms.
4. Recommended laser brands:
 - Any tunable laser of Agilent/ Keysight with trigger output.
 - Santec 5 and 7 series tunable lasers with trigger output (confirm with GP)

Applications:

- PDL vs. wavelength measurement
- IL vs. wavelength measurement
- IL/Power vs. Time
- Pass band parameters: center frequency, BW, ripple, noise floor
- Fiber optic component characterization
- Network component characterization (DWDM, ROADM, ect.)
- Planar Lightwave Circuits (PLC)
- Photonics Integrated Circuit (PIC)

Unique Features:

- Wide wavelength range
- High PDL accuracy
- High channel-to-channel uniformity
- User-friendly control program

General Photonics Corp.
5228 Edison Ave.
Chino, CA 91710

Tel: 909.590.5473
Fax: 909.902.5536

Email:
info@generalphotonics.com

Website:
www.generalphotonics.com

Ordering Information:

OCA - 1000 - XX

of Channels: ←
8 standard

Typical Performance Data

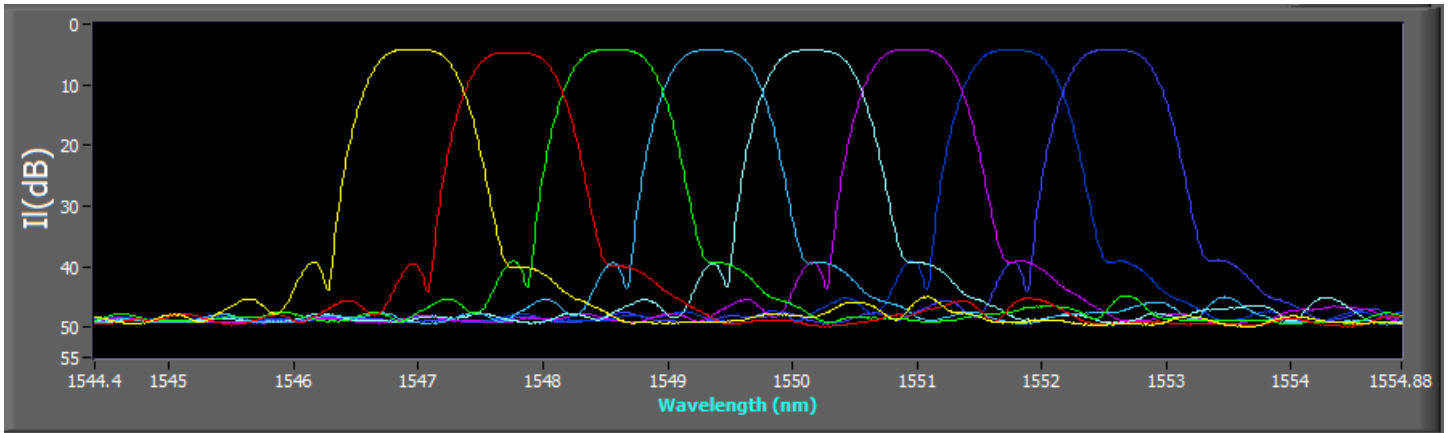


Figure 1. IL vs. wavelength for 8 channels of an arrayed waveguide grating (AWG). Pass bands for each channel are clearly visible.

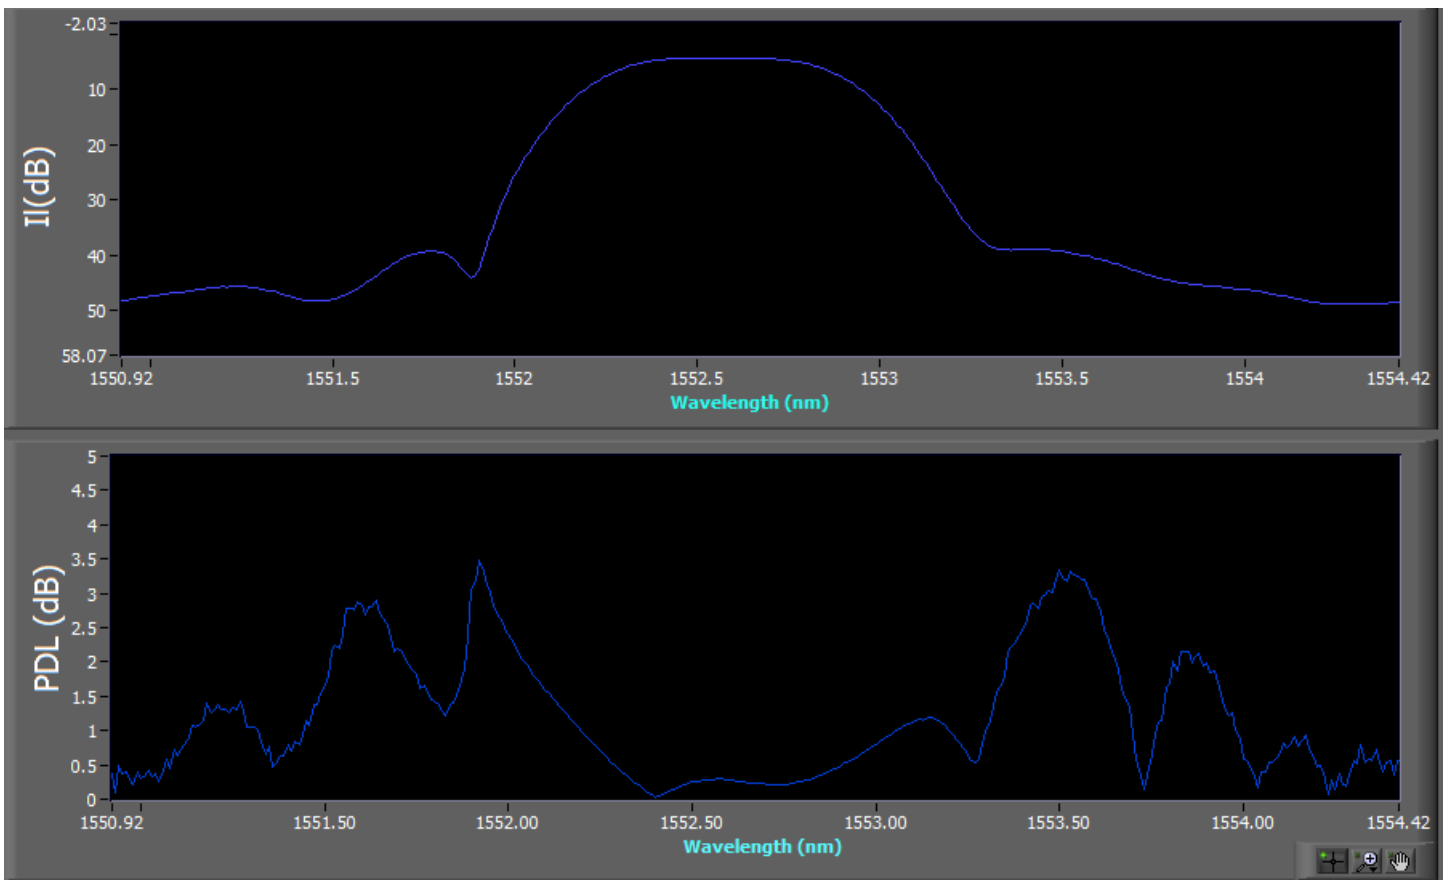


Figure 2. IL and PDL vs. wavelength for one channel of the AWG. PDL is relatively flat over the passband of this channel.

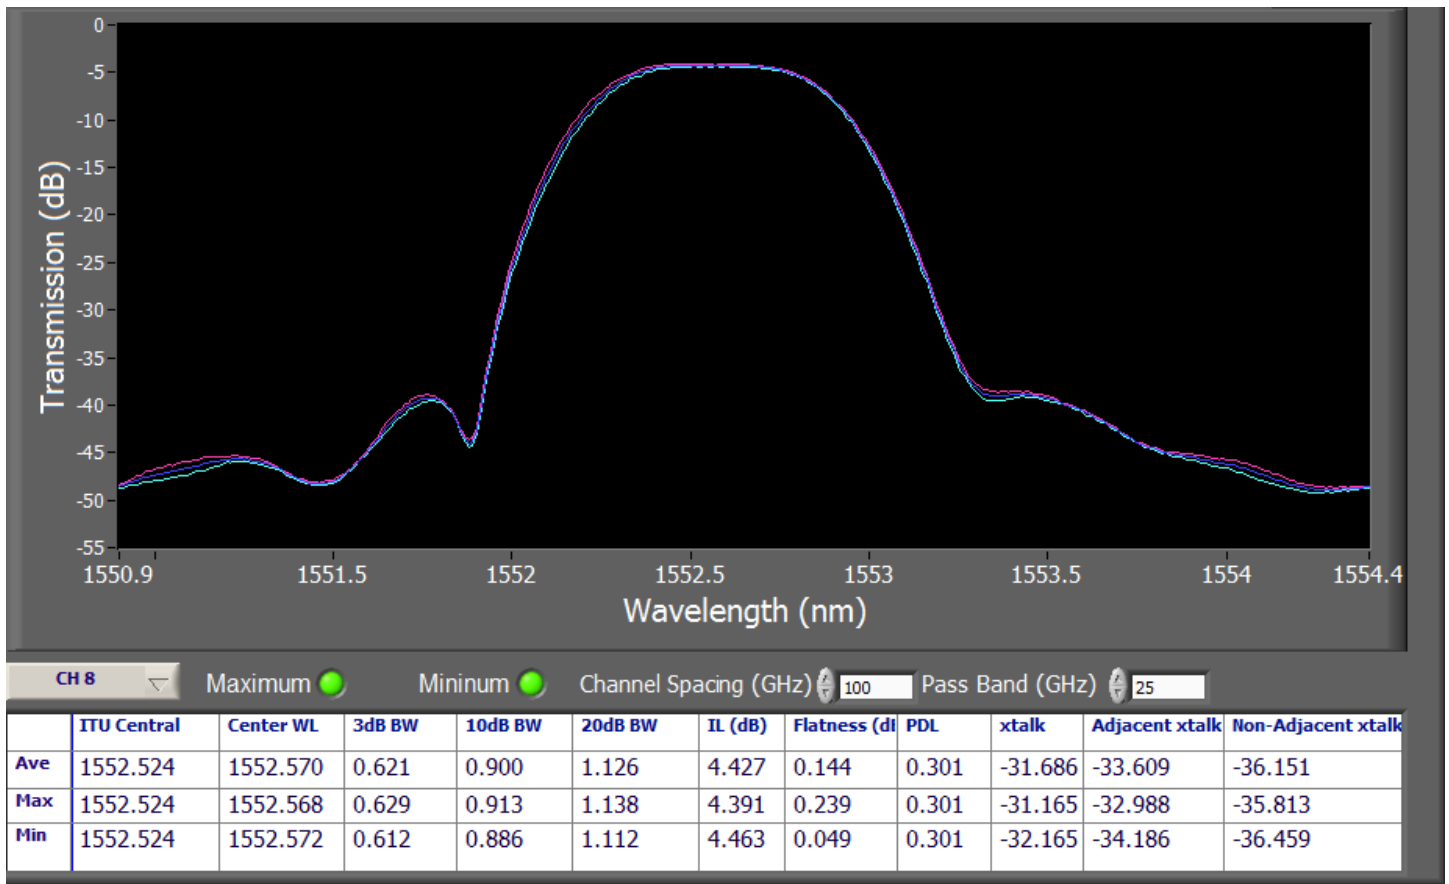


Figure 3 Detailed transmission vs. wavelength data for one channel of the same AWG. The plot shows the maximum, minimum, and average transmission vs. wavelength. The difference between maximum and minimum is an indication of the polarization dependent behavior for this device. The table shows the passband, flatness, and crosstalk information for this channel.

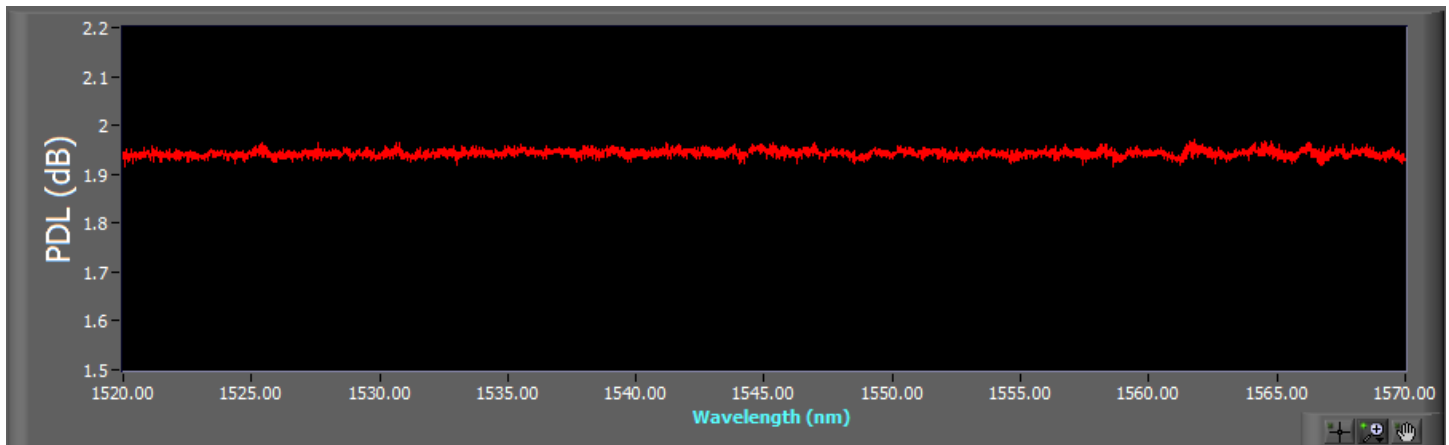


Figure 4. PDL vs. wavelength for a 1.96dB PDL artifact. The data indicates that the PDL of this device is relatively flat over the tested wavelength range.