

Anritsu envision : ensure

ShockLine™ Performance Vector Network Analyzers

MS46522B

50 kHz to 43.5 GHz, E-Band



Introduction

The MS46522B is part of the ShockLine family of Vector Network Analyzers from Anritsu. It is a series of high performance, 3U tall, 2-port VNAs available in five different models: Three frequency models from 50 kHz to 43.5 GHz, and two E-band options with either one meter or five meter tethers. The MS46522B series is optimized for measuring S-parameters and time domain characteristics of passive RF and microwave devices.

The VNA supports SCPI command programming and has software driver support for the most common programming environments. The MS46522B uses industry standard LAN communications for robust remote control in test applications. ShockLine VNAs also provide a powerful graphical user interface for manual testing of devices. A full-featured user interface is enabled by attaching a (user-supplied) touchscreen monitor, keyboard, and mouse.

This document provides detailed specifications for the MS46522B Vector Network Analyzers (VNAs) and related options.

Instrument Models and Operating Frequencies

Base Model


- MS46522B, 2-Port ShockLine VNA

Requires one Frequency Option

- MS46522B-010, 50 kHz to 8.5 GHz
- MS46522B-020, 50 kHz to 20 GHz
- MS46522B-043, 50 kHz to 43.5 GHz
- MS46522B-082, 55 GHz to 92 GHz, one meter tethers
- MS46522B-083, 55 GHz to 92 GHz, five meter tethers

Principal Options

- MS46522B-002, Time Domain
- MS46522B-022, Advanced Time Domain
- MS46522B-024, Universal Fixture Extraction
- MS46522B-061, Bias Tee (Only available with Option 10)

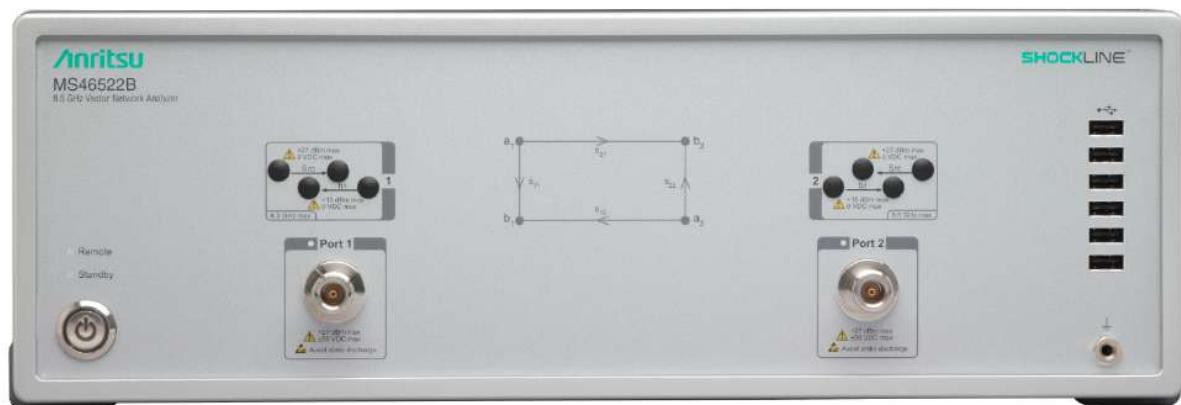

MS46522B ShockLine Performance VNA (8.5 GHz model shown)

Table of Contents

Definitions 4

System Dynamic Range 5

Receiver Compression Levels 5

High Level Noise 5

Output Power Range 6

Output Default Power 7

Power Accuracy 7

Power Setting Resolution 7

Measurement Stability 7

Frequency Resolution, Accuracy, and Stability 7

Source Harmonics and Non-Harmonics (Spurious) 7

Uncorrected (Raw) Port Characteristics 7

MS46522B-010 VNA System Performance with Manual Cal Kits 8

MS46522B-020 VNA System Performance with Manual Cal Kits 9

MS46522B-043 VNA System Performance with Manual Cal Kits 10

MS46522B-043 VNA System Performance with Manual Cal Kits 11

MS46522B-010 VNA System Performance with SmartCal™ 12

MS46522B-010 VNA System Performance with SmartCal™ 13

MS46522B-010 and MS46522B-020 VNA System Performance with SmartCal™ 14

MS46522B-010 and MS46522B-020 VNA System Performance with SmartCal™ 15

MS46522B-043 VNA System Performance with Precision AutoCal™ 16

MS46522B E-Band VNA System Performance 17

MS46522B-082 and MS46522B-083 E-Band VNA System Performance with Waveguide Cal Kit 19

Measurement Throughput Summary 20

Standard Capabilities 20

Calibration and Correction Capabilities 22

Optional Capabilities 23

Remote Operability 23

Front Panel Connections 24

Rear Panel Connections 25

CPU, Memory, and Security Features 26

Mechanical 26

Regulatory Compliance 26

Environmental 26

Warranty 26

Ordering Information 27

Definitions

| | |
|----------------------------------|--|
| | This technical data sheet applies to the following hardware revisions: MS46522B base model, revision 3 MS46522B-010 8.5 GHz option, revision 5 MS46522B-020 20 GHz option, revision 5 MS46522B-043 43.5 GHz option, revision 1 MS46522B-082 E-band 1m tethers option, revision 4 MS46522B-083 E-band 5m tethers option, revision 2 |
| | All specifications and characteristics apply under the following conditions, unless otherwise stated: |
| Warm-Up Time | After 45 minutes of warm-up time, where the instrument is left in the ON state. |
| Temperature Range | Over the 25 °C ± 5 °C temperature range. |
| Frequency Range | Unless otherwise noted, the instrument operates in the following frequency ranges without any implied or warranted specifications: 55 GHz to 60 GHz, and from 90 GHz to 92 GHz. |
| Specifications | Error-corrected specifications are valid over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. Specifications are warranted and include guard-bands, unless otherwise stated. |
| Frequency Bands in Tables | When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band. |
| User Cables | Specifications do not include effects of any user cables attached to the instrument. |
| Discrete Spurious Responses | Specifications may exclude discrete spurious responses. |
| Internal Reference Signal | All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal. |
| Interpolation Mode | All specifications are with Interpolation Mode Off. |
| Standard | Refers to instruments with mandatory frequency option only. |
| Typical Performance | Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical. |
| Characteristic Performance | Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty. |
| Recommended Calibration Cycle | 12 months (Residual specifications also require calibration kit calibration cycle adherence.) |
| Specifications Subject to Change | All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com |

System Dynamic Range

System dynamic range is calculated as the difference between the test port maximum source power and the RMS noise floor at 10 Hz IF Bandwidth with ports terminated, averaging off, and smoothing on after calibrating the instrument for transmission frequency response and isolation. Measurement uncertainty and interfering signals must be taken into account when determining effective dynamic range.

MS46522B 8.5 GHz Model

| Frequency Range | Standard (dB) | Typical (dB) |
|--------------------|---------------|--------------|
| 50 kHz to 1 MHz | 90 | 101 |
| > 1 MHz to 50 MHz | 100 | 108 |
| > 50 MHz to 2 GHz | 140 | 144 |
| > 2 GHz to 4 GHz | 137 | 142 |
| > 4 GHz to 6 GHz | 130 | 137 |
| > 6 GHz to 8 GHz | 128 | 130 |
| > 8 GHz to 8.5 GHz | 120 | 127 |

MS46522B 20 GHz and 43.5 GHz Models

| Frequency Range | Standard (dB) | Typical (dB) |
|----------------------|---------------|--------------|
| 50 kHz to 1 MHz | 90 | 101 |
| > 1 MHz to 50 MHz | 100 | 108 |
| > 50 MHz to 2 GHz | 140 | 144 |
| > 2 GHz to 4 GHz | 137 | 142 |
| > 4 GHz to 6 GHz | 130 | 137 |
| > 6 GHz to 8 GHz | 122 | 124 |
| > 8 GHz to 8.5 GHz | 118 | 122 |
| > 8.5 GHz to 12 GHz | 114 | 120 |
| > 12 GHz to 25 GHz | 117 | 122 |
| > 25 GHz to 40 GHz | 119 | 126 |
| > 40 GHz to 43.5 GHz | 110 | 120 |

Receiver Compression Levels

Port power level beyond which the response may be compressed more than 0.2 dB relative to the normalization level. Measured at 300 Hz IF bandwidth. Match not included. Characteristic performance.


| Frequency Range | Level (dBm) |
|---------------------------------|-------------|
| 50 kHz to 300 kHz | +10 |
| > 300 kHz to 8 GHz ^a | +15 |
| > 8 GHz to 43.5 GHz | +10 |

a. 8.5 GHz for Option 10

High Level Noise

Measured at 100 Hz IF bandwidth and at default power level, RMS.

| Frequency | Magnitude (dB) | Phase (deg) |
|----------------------|------------------------|----------------------|
| 50 kHz to 300 kHz | 0.02 (0.01, typical) | 0.15 (0.08, typical) |
| > 300 kHz to 1 GHz | 0.004 (0.003, typical) | 0.04 (0.02, typical) |
| > 1 GHz to 25 GHz | 0.004 (0.002, typical) | 0.05 (0.02, typical) |
| > 25 GHz to 43.5 GHz | 0.004 (0.002, typical) | 0.05 (0.04, typical) |

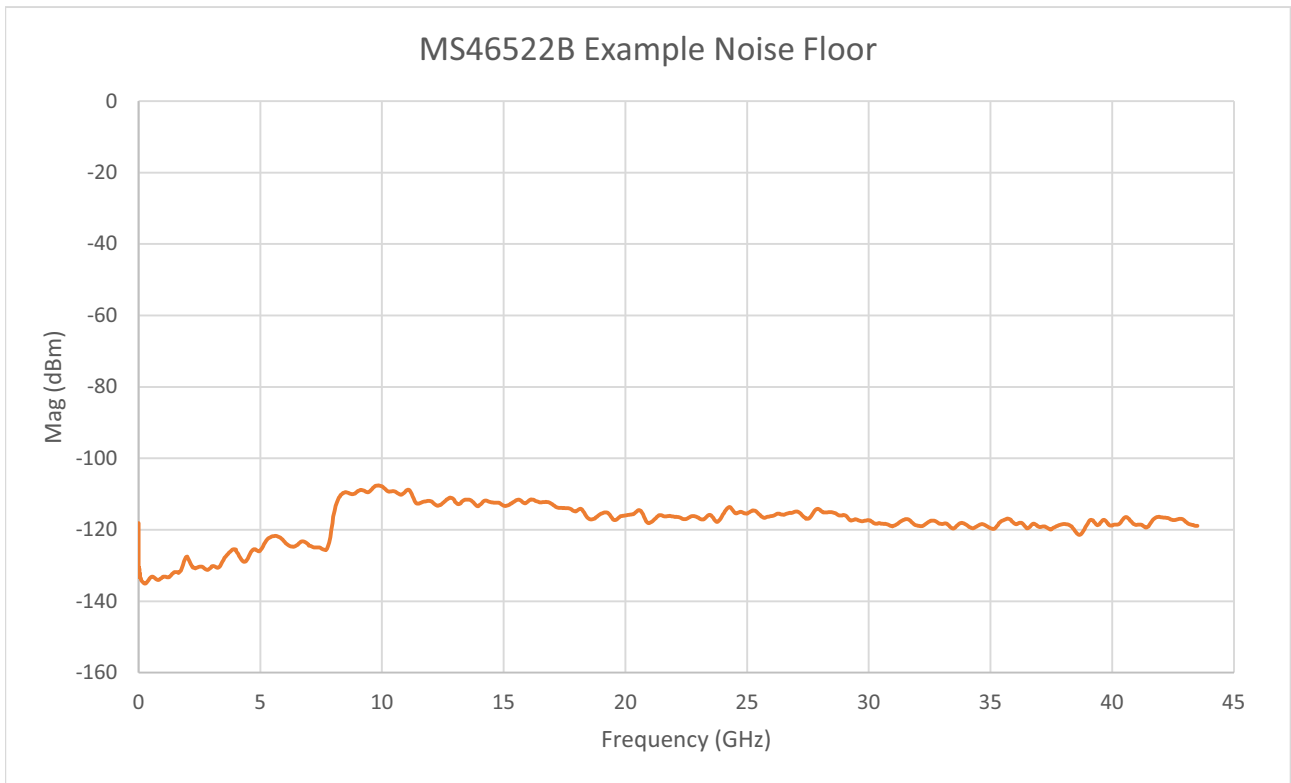


Output Power Range

Minimum to maximum rated power level.

| Frequency | Standard (dBm) | Typical (dBm) |
|----------------------|-------------------------|---------------|
| 50 kHz to 300 kHz | -30 to +9 | -30 to +12 |
| > 300 kHz to 6 GHz | -30 to +15 | -30 to +17 |
| > 6 GHz to 8 GHz | -30 to +12 ^a | -30 to +13 |
| > 8 GHz to 8.5 GHz | -30 to +10 | -30 to +11 |
| > 8.5 GHz to 40 GHz | -30 to +6 | -30 to +9 |
| > 40 GHz to 43.5 GHz | -30 to +2 | -30 to +4 |

a. Maximum power degrades by 2 dB for Options 20 and 43.

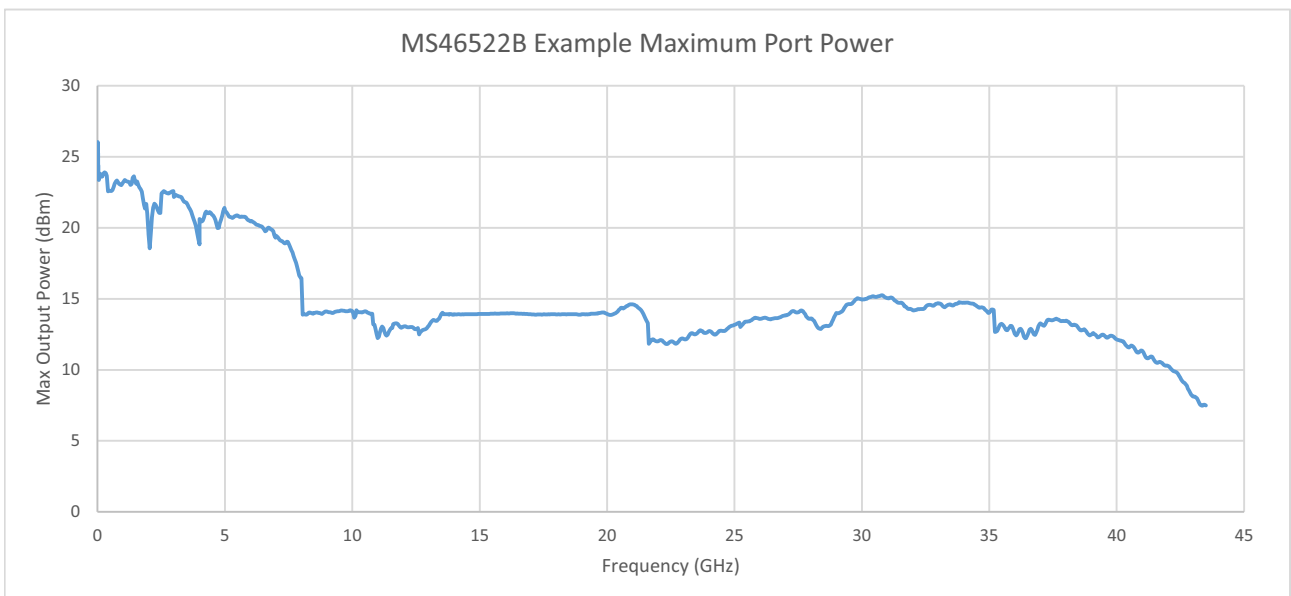

Output Default Power

Instrument default power is 0 dBm. For maximum rated power, refer to Output Power Range above. Not applicable to MS46522B-08x.

Power Accuracy

Not applicable to MS46522B-08x.

| Output Power | 50 kHz to 8.5 GHz (dB) | > 8.5 GHz to 25 GHz (dB) | > 25 GHz to 40 GHz (dB) | > 40 GHz to 43.5 GHz (dB) |
|-------------------------|---------------------------|--------------------------|-------------------------|---------------------------|
| At 0 dBm | $\pm 1.5^a$ (± 0.5) | ± 2.0 (± 0.5) | ± 2.5 (± 0.5) | ± 3.0 (± 1.0) |
| At -30 dBm ^b | ± 3.0 | ± 3.0 | ± 3.0 | ± 3.0 |

a. Source is open loop below 300 kHz. ± 2 dB typical.

b. Performance is typical.

Power Setting Resolution

| Output Power | Setting Resolution (dB) |
|--------------------|-------------------------|
| 50 kHz to 43.5 GHz | 0.01 |

Measurement Stability

Ratioed measurement, with ports shorted. Typical.

| Frequency | Magnitude (dB/°C) | Phase (deg/°C) |
|----------------------|-------------------|----------------|
| 50 kHz to 8.5 GHz | 0.02 | 0.5 |
| > 8.5 GHz to 40 GHz | 0.01 | 1.0 |
| > 40 GHz to 43.5 GHz | 0.02 | 1.5 |

Frequency Resolution, Accuracy, and Stability

Applies to all MS46522B frequency models except frequency options 82 and 83 (E-band models).

| Resolution | Accuracy (ppm) | Stability/Temperature ^a | Stability ^a |
|------------|---------------------------------------|------------------------------------|---|
| 1 Hz | ± 0.1 (at time of calibration) | ± 0.1 ppm/10 °C to 50 °C | ± 0.02 ppm/24 hours ± 0.2 ppm/1 month ± 1.0 ppm/1 year ± 2.0 ppm/3 years |

a. Typical

Source Harmonics and Non-Harmonics (Spurious)

Measured at 0 dBm. All specifications typical.

| Frequency | Harmonics (second and third) (dBc) | Non-Harmonic Spurious (dBc) | Phase Noise @ 10 kHz Offset (dBc/Hz) |
|--------------------------------|------------------------------------|-----------------------------|--------------------------------------|
| 50 kHz to 8 GHz ^{a,b} | < -30 | < -30 | < -60 |
| > 8 GHz to 15 GHz ^c | < -12 | < -30 | < -60 |
| > 15 GHz to 22 GHz | < -15 | < -30 | < -60 |
| > 22 GHz to 43.5 GHz | < -20 | < -30 | < -60 |

a. 50 kHz to 8.5 GHz for Option 10.

b. 50 kHz to 300 kHz: <-8 dBc harmonics, <-20 dBc Non-Harmonic Spurious.

c. In High Fidelity mode for Frequency Options 20 and 43.

Uncorrected (Raw) Port Characteristics

User correction off. System correction on. All specifications typical.

| Frequency Range | Directivity (dB) | Port Match (dB) ^a |
|-----------------------|------------------|------------------------------|
| 50 kHz to 1 GHz | > 21 | > 17 |
| > 1 GHz to 4 GHz | > 21 | > 17 |
| > 4 GHz to 8.5 GHz | > 15 | > 15 |
| > 8.5 GHz to 43.5 GHz | > 15 | > 15 |

a. Port Match is defined as the worst of source and load match.

MS46522B-010 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLN50A-18 N Type Connector Calibration Kit.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 50 kHz to 50 MHz | > 40 | > 35 | > 38 | ±0.15 | ±0.09 |
| > 50 MHz to 6 GHz | > 40 | > 35 | > 38 | ±0.08 | ±0.05 |
| > 6 GHz to 8 GHz | > 36 | > 35 | > 34 | ±0.08 | ±0.05 |
| > 8 GHz to 8.5 GHz | > 36 | > 35 | > 34 | ±0.10 | ±0.08 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

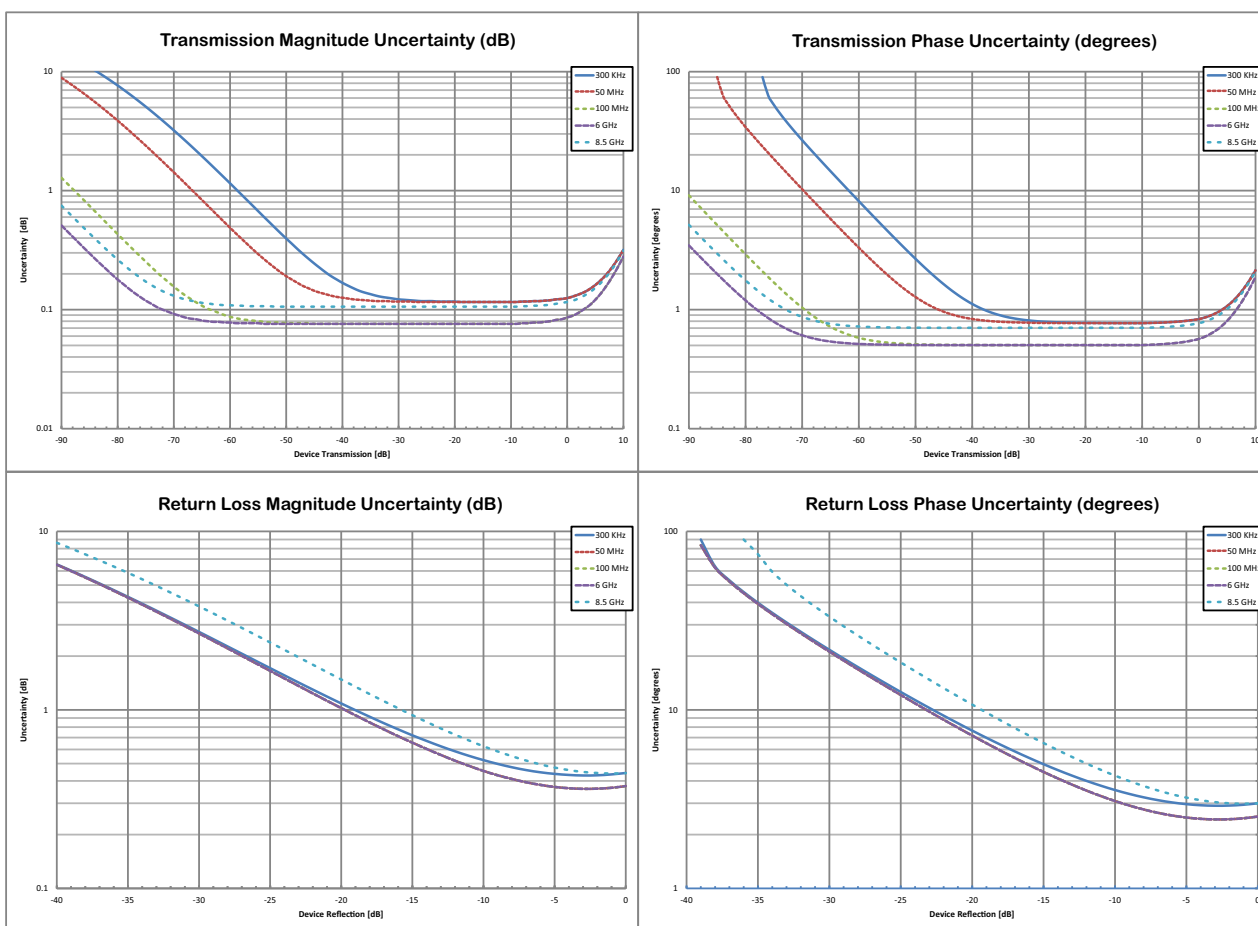

MS46522B-020 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLKF50A-40 K Type Connector Calibration Kit.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 50 kHz to 50 MHz | > 42 | > 35 | > 42 | ±0.10 | ±0.09 |
| > 50 MHz to 10 GHz | ≥ 42 | ≥ 35 | ≥ 42 | ±0.10 | ±0.05 |
| > 10 GHz to 20 GHz | ≥ 36 | ≥ 26.5 | ≥ 36 | ±0.10 | ±0.05 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

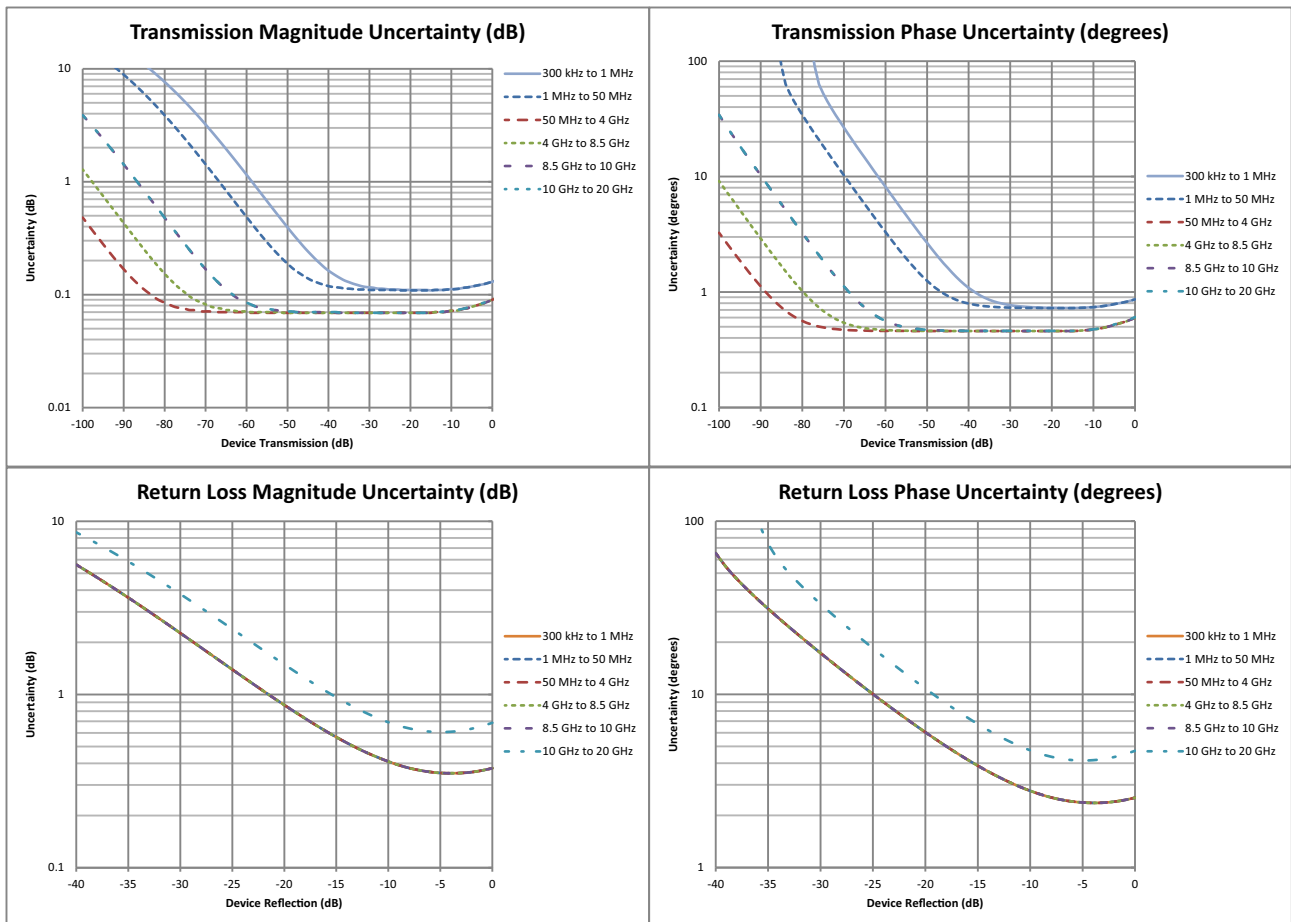

MS46522B-043 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLK50A-43.5 or TOSLKF50A-43.5 K Type Connector Calibration Kit with generic calibration coefficients.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|----------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 50 kHz to 50 MHz | > 42 | > 35 | > 42 | ±0.10 | ±0.09 |
| > 50 MHz to 10 GHz | ≥ 42 | ≥ 35 | ≥ 42 | ±0.10 | ±0.05 |
| > 10 GHz to 20 GHz | ≥ 36 | ≥ 26.5 | ≥ 36 | ±0.10 | ±0.05 |
| > 20 GHz to 30 GHz | ≥ 32 | ≥ 22.5 | ≥ 32 | ±0.10 | ±0.05 |
| > 30 GHz to 40 GHz | ≥ 30 | ≥ 20 | ≥ 30 | ±0.10 | ±0.05 |
| > 40 GHz to 43.5 GHz | ≥ 28 | ≥ 20 | ≥ 28 | ±0.10 | ±0.05 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

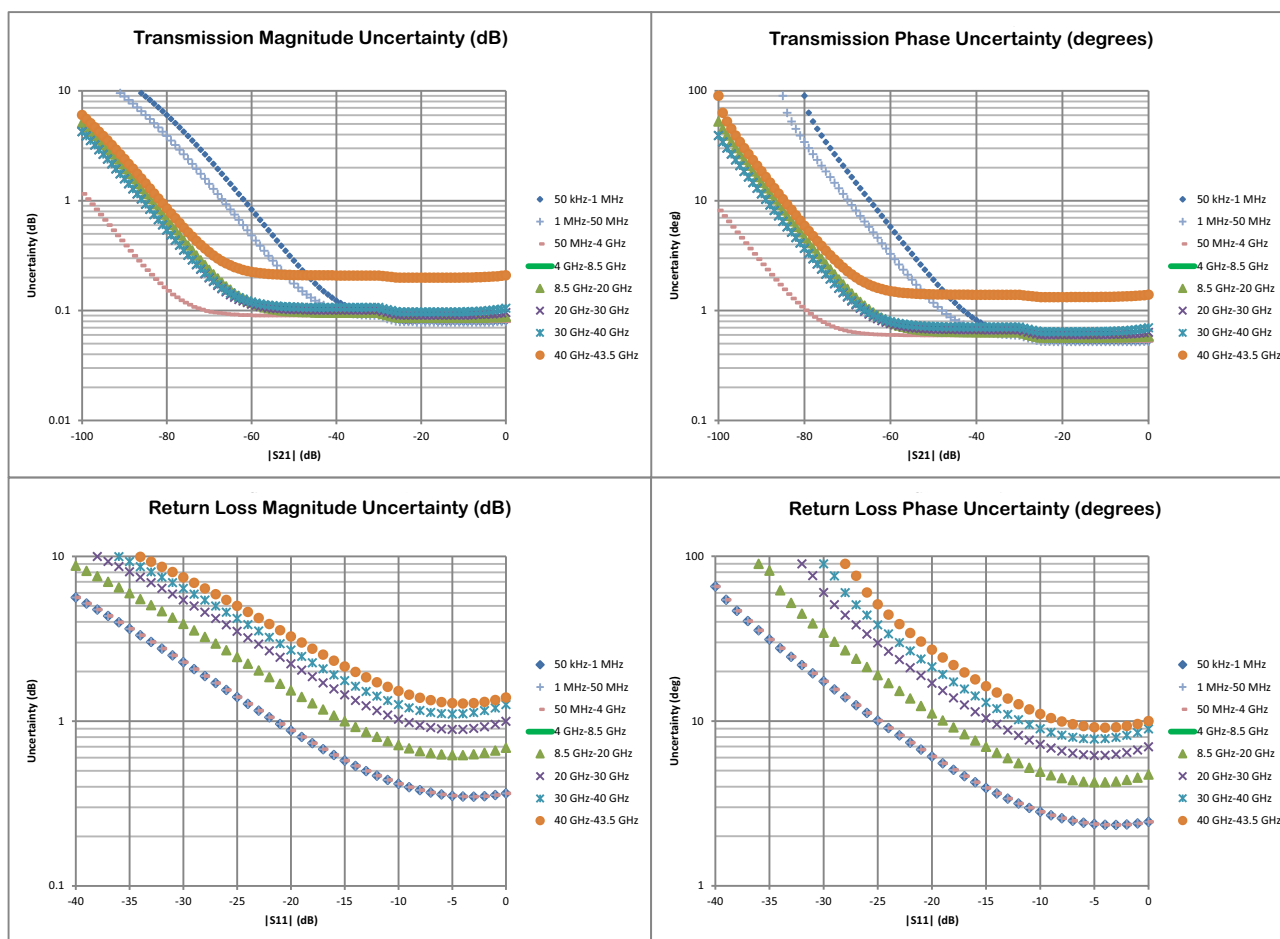

MS46522B-043 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLK50A-43.5 or TOSLKF50A-43.5 Type Connector Calibration Kit with .s1p definitions.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|----------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| < 50 MHz | > 45 | > 45 | > 44 | ±0.10 | ±0.05 |
| > 0.05 GHz to 10 GHz | ≥ 45 | ≥ 45 | ≥ 44 | ±0.10 | ±0.05 |
| > 10 GHz to 20 GHz | ≥ 45 | ≥ 45 | ≥ 44 | ±0.10 | ±0.05 |
| > 20 GHz to 30 GHz | ≥ 45 | ≥ 44 | ≥ 44 | ±0.10 | ±0.05 |
| > 30 GHz to 40 GHz | ≥ 45 | ≥ 42 | ≥ 44 | ±0.10 | ±0.05 |
| > 40 GHz to 43.5 GHz | ≥ 42 | ≥ 41 | ≥ 41 | ±0.175 | ±0.15 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

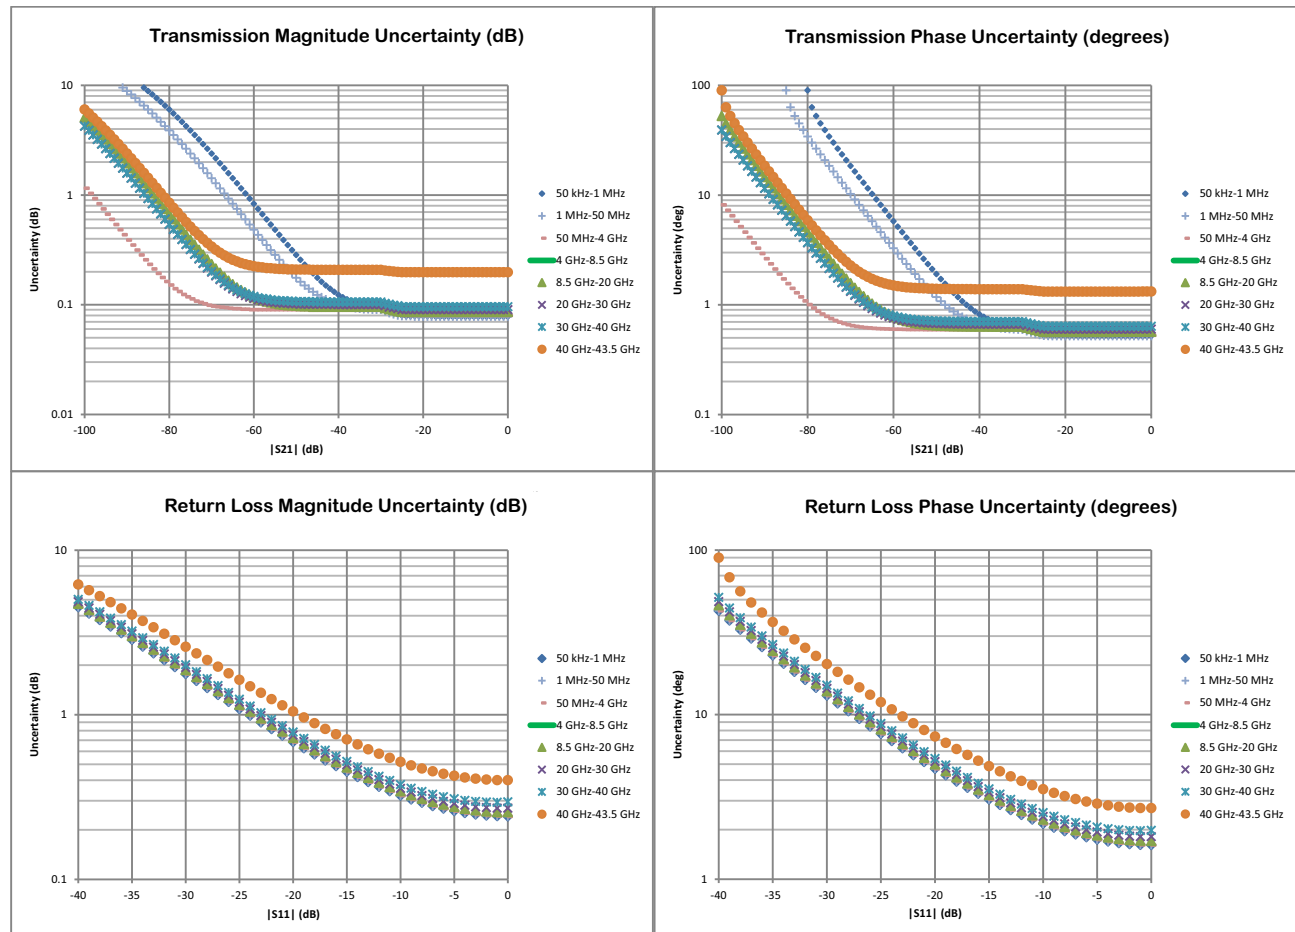

MS46522B-010 VNA System Performance with SmartCal™

Error-Corrected Specifications


With 12-term calibration using the MN25208A SmartCal™ automatic calibration kit with connector options MN25208A-001, -002, -003

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 300 kHz to 1 GHz | > 42 | > 35 | > 38 | ±0.15 | ±0.08 |
| > 1 GHz to 5 GHz | > 42 | > 35 | > 38 | ±0.08 | ±0.08 |
| > 5 GHz to 8.5 GHz | > 36 | > 35 | > 33 | ±0.10 | ±0.08 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

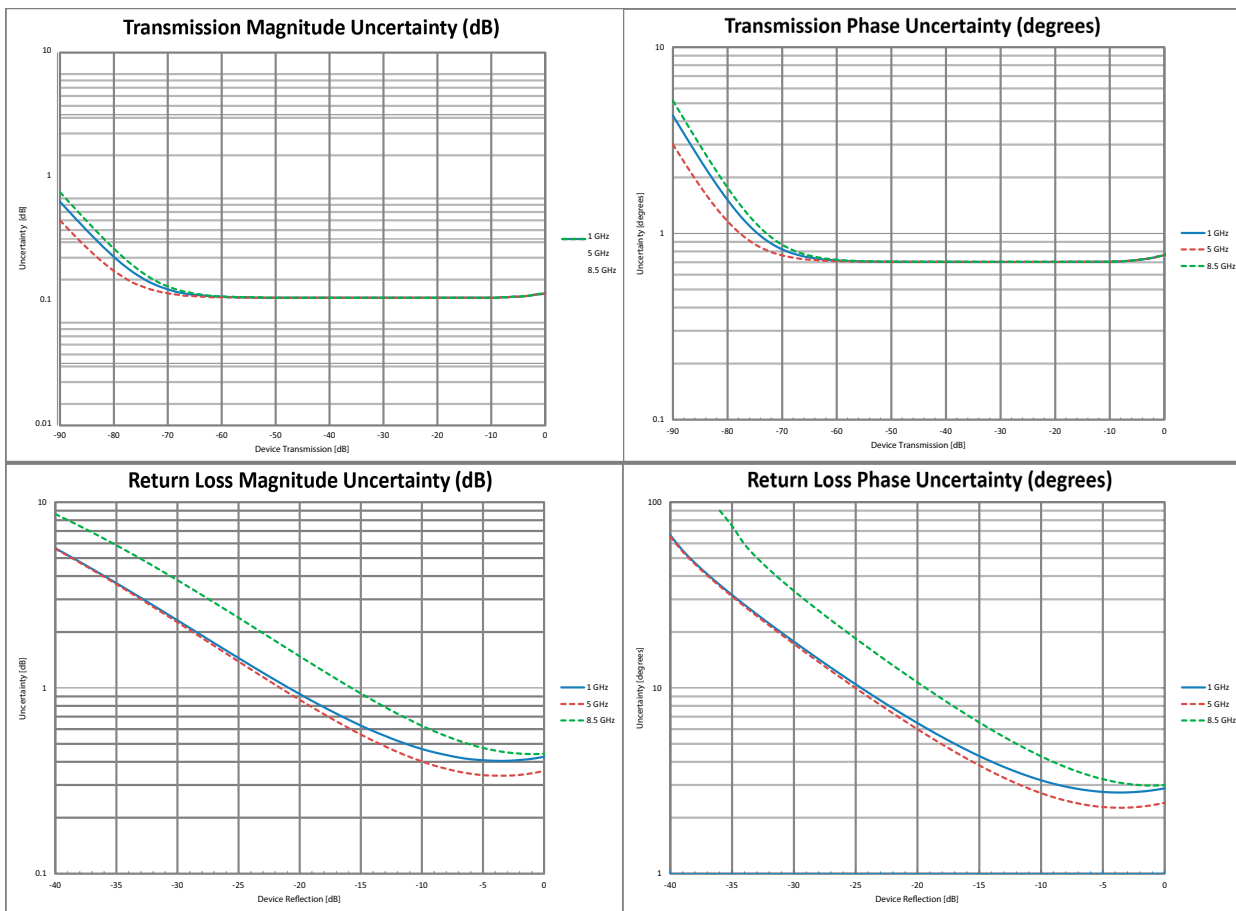

MS46522B-010 VNA System Performance with SmartCal™

Error-Corrected Specifications


With 12-term calibration using the MN25408A SmartCal™ automatic calibration kit with option MN25408A-001, -002, -003

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 300 kHz to 1 GHz | > 42 | > 35 | > 38 | ±0.15 | ±0.2 |
| > 1 GHz to 5 GHz | > 40 | > 35 | > 38 | ±0.08 | ±0.2 |
| > 5 GHz to 8.5 GHz | > 33 | > 32 | > 33 | ±0.10 | ±0.2 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

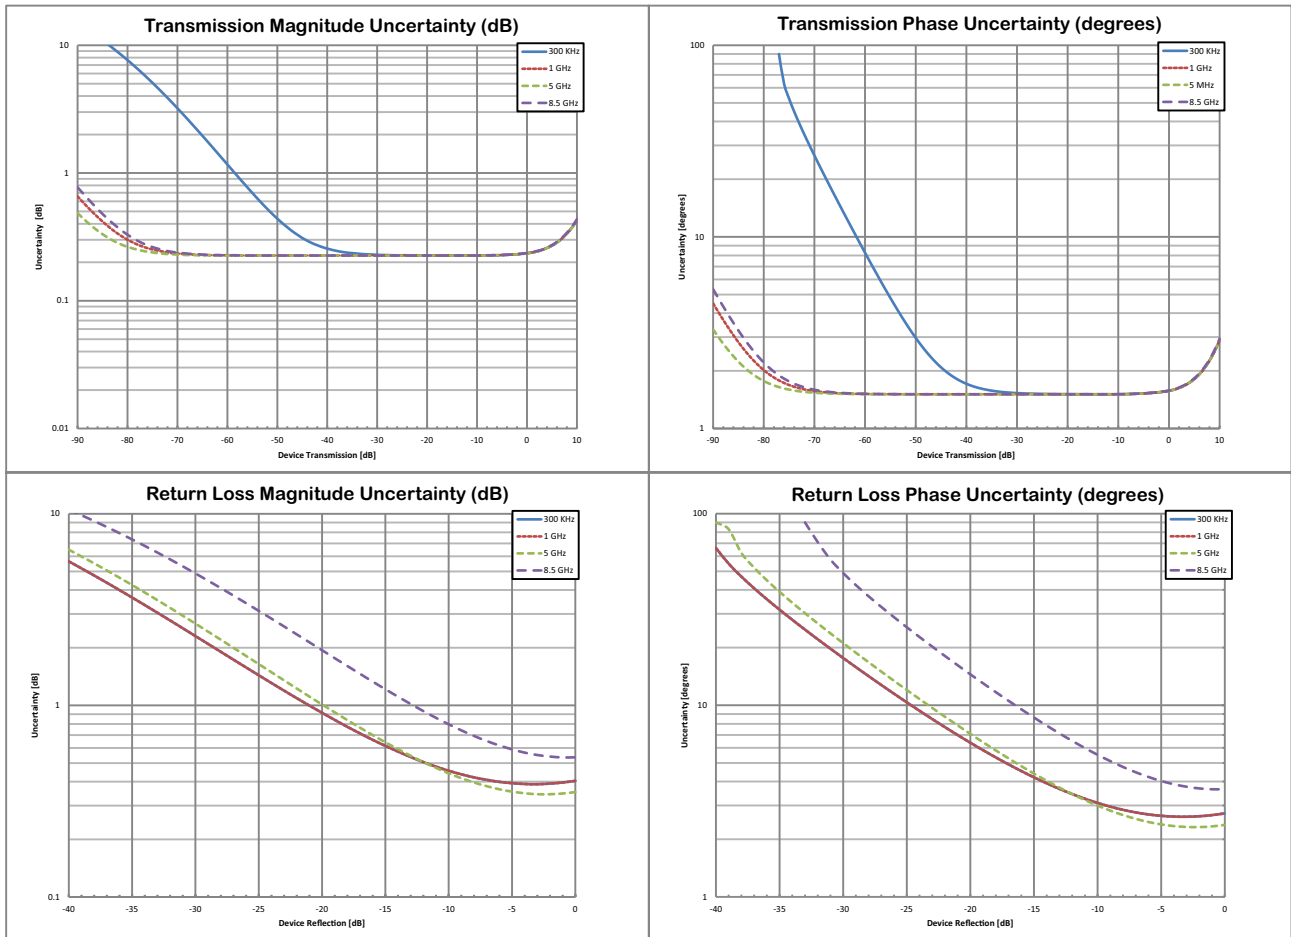

MS46522B-010 and MS46522B-020 VNA System Performance with SmartCal™

Error-Corrected Specifications

With 12-term calibration using the 2-port MN25218A SmartCal™ automatic calibration kit.


| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|-------------------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 300 kHz to 1 GHz ^b | > 42 | > 33 | > 42 | ±0.15 | ±0.06 |
| > 1 GHz to 10 GHz | > 37 | > 33 | > 42 | ±0.15 | ±0.06 |
| > 10 GHz to 18 GHz | > 37 | > 33 | > 37 | ±0.15 | ±0.10 |
| > 18 GHz to 20 GHz | > 37 | > 33 | > 37 | ±0.20 | ±0.20 |

a. Characteristic performance

b. Applies to Rev 2 SmartCal Modules. MN25218A with serial numbers <1817999 operate from 1 MHz to 20 GHz.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

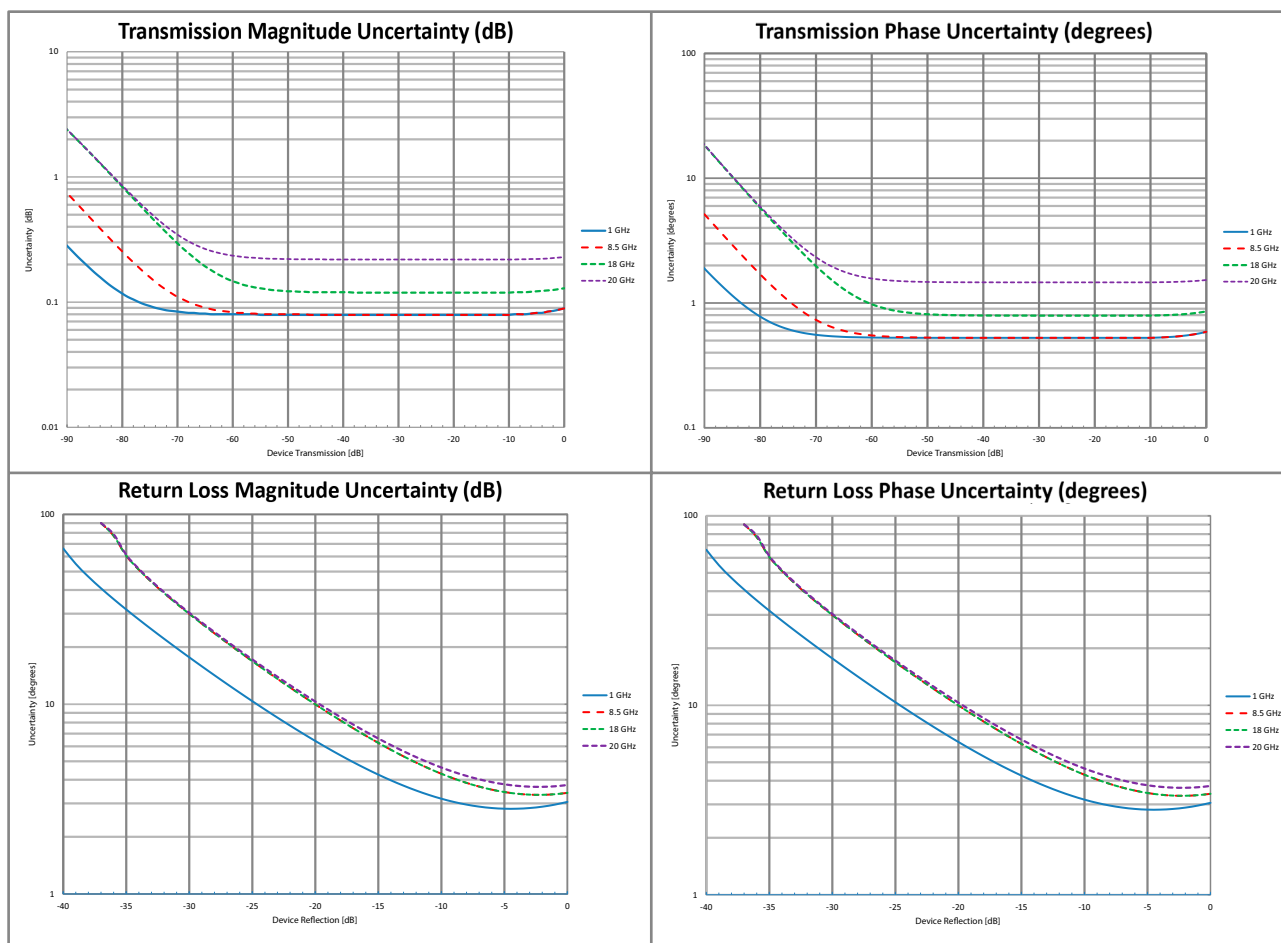

MS46522B-010 and MS46522B-020 VNA System Performance with SmartCal™

Error-Corrected Specifications


With 12-term calibration using the 4-port MN25418A SmartCal™ automatic calibration kit.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 300 kHz to 6 GHz | ≥ 40 | ≥ 31 | ≥ 42 | ±0.15 | ±0.15 |
| > 6 GHz to 18 GHz | ≥ 35 | ≥ 31 | ≥ 37 | ±0.20 | ±0.20 |
| > 18 GHz to 20 GHz | ≥ 35 | ≥ 31 | ≥ 34 | ±0.20 | ±0.25 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

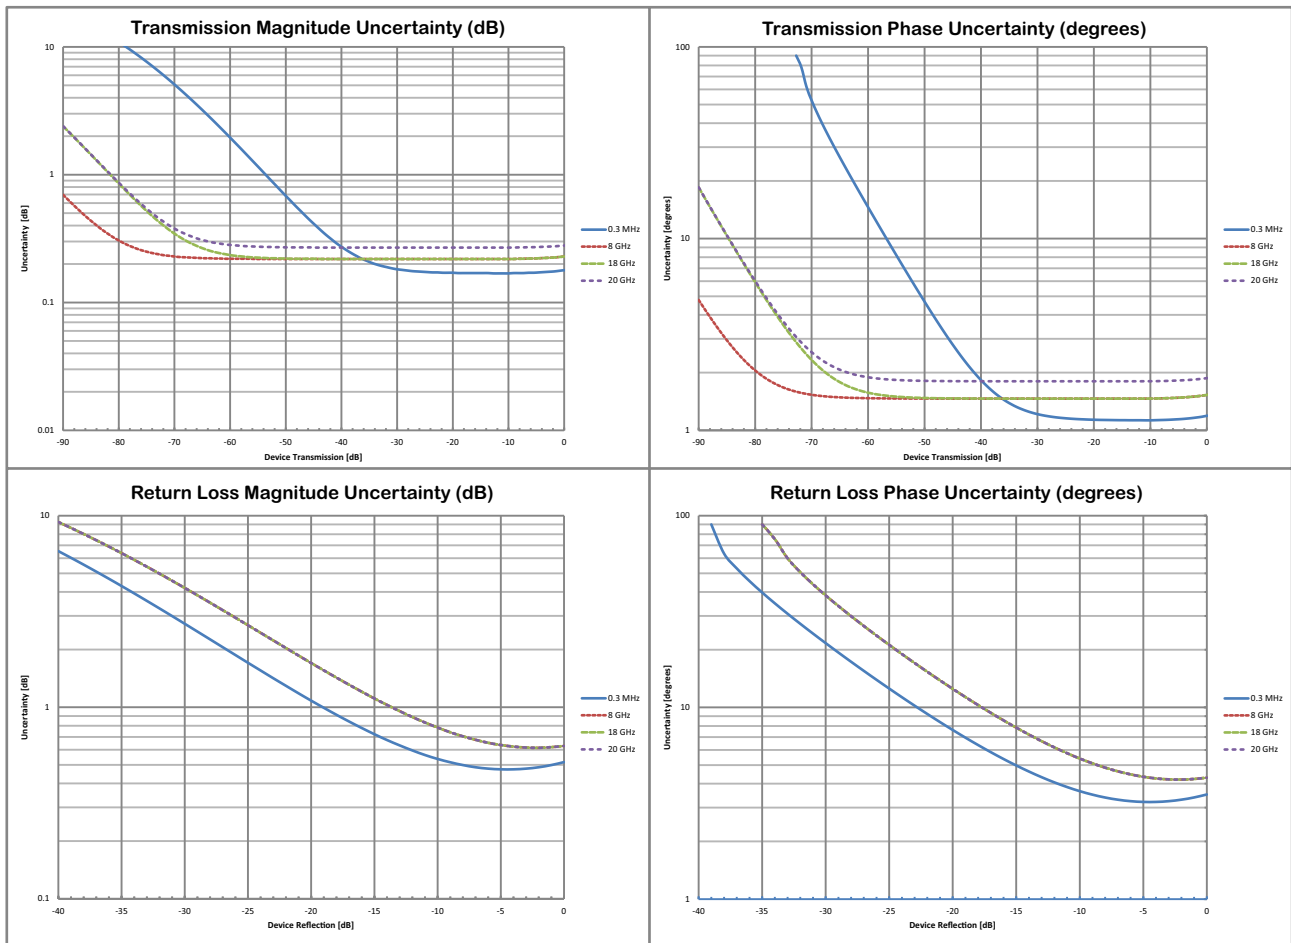

MS46522B-043 VNA System Performance with Precision AutoCal™

Error-Corrected Specifications


With 12-term calibration using the 2-port 36585K automatic calibration kit with type K connectors.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|---------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 70 kHz to < 10 MHz | ≥ 40 | ≥ 40 | ≥ 40 | ±0.10 | ±0.20 |
| 10 MHz to < 2.5 GHz | ≥ 43 | ≥ 47 | ≥ 43 | ±0.20 | ±0.20 |
| 2.5 GHz to < 4 GHz | ≥ 50 | ≥ 47 | ≥ 50 | ±0.20 | ±0.20 |
| 4 GHz to < 8 GHz | ≥ 50 | ≥ 47 | ≥ 50 | ±0.30 | ±0.20 |
| 8 GHz to < 11 GHz | ≥ 50 | ≥ 47 | ≥ 50 | ±0.40 | ±0.20 |
| 11 GHz to < 20 GHz | ≥ 50 | ≥ 47 | ≥ 50 | ±0.30 | ±0.20 |
| 20 GHz to 40 GHz | ≥ 48 | ≥ 47 | ≥ 48 | ±0.40 | ±0.20 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

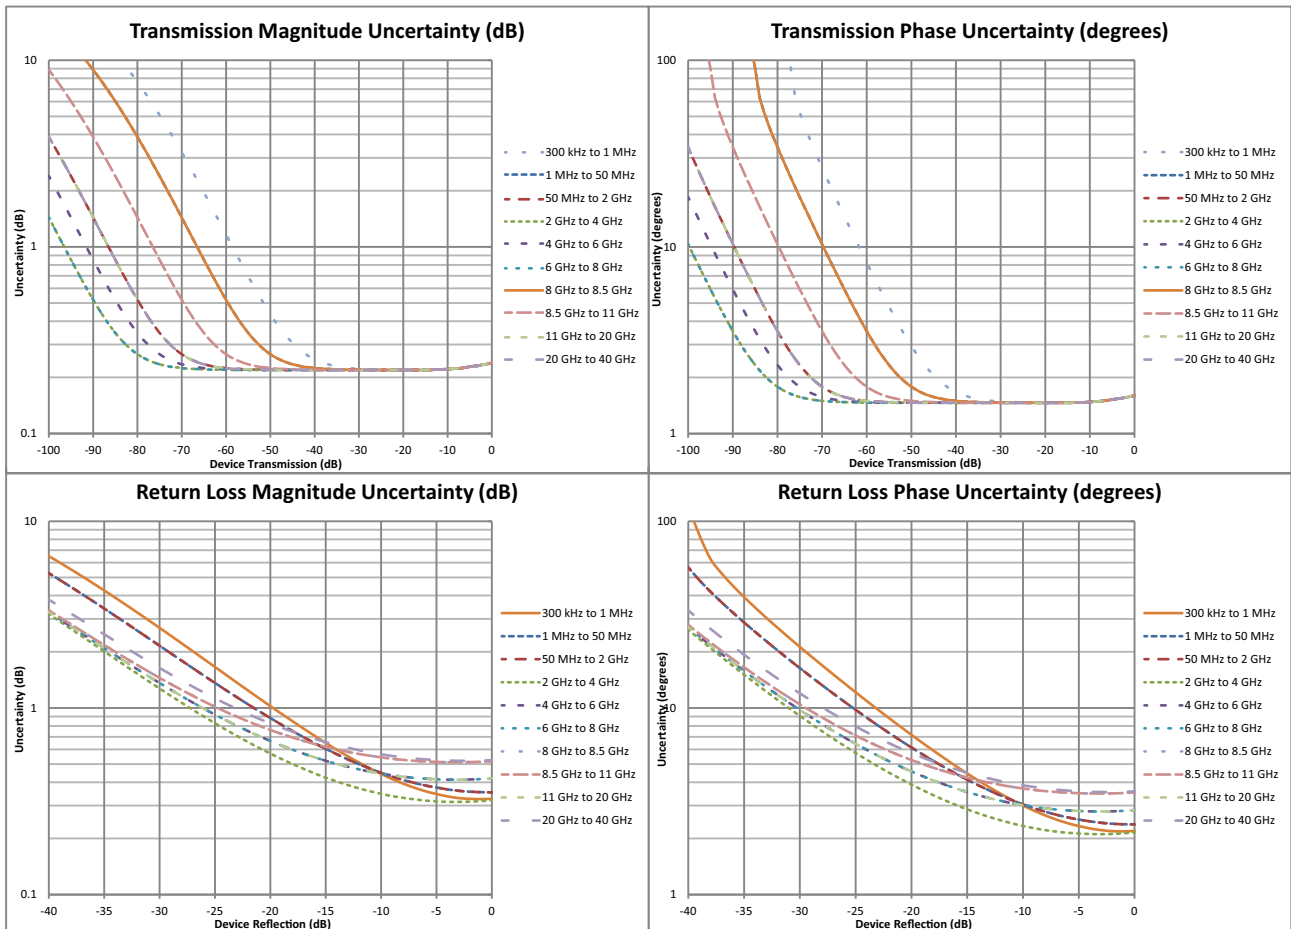

MS46522B E-Band VNA System Performance

Introduction

The E-band Option 82 and Option 83 consist of the MS46522B Series VNA base chassis and small source/receiver modules. The modules are attached to the chassis through one meter (Option 82) or five meter (Option 83) flexible tethers that are permanently attached to the unit. Units must have options 82 and 83 ordered and installed new by the factory. Those options are not interchangeable nor upgradeable on existing units.

| Band | Frequency Range | Waveguide Flange |
|-----------------|------------------|------------------|
| Extended E-Band | 55 GHz to 92 GHz | WR-12 |



MS46522B E-Band VNA with E-band Option MS46522B-082



MS46522B E-Band VNA with E-band Option MS46522B-083

System Dynamic Range

System dynamic range is calculated as the difference between the test port maximum source power and the RMS noise floor at 10 Hz IF Bandwidth with averaging off and smoothing on after calibrating the instrument for transmission frequency response and isolation.¹

| Frequency | Option -082, 1 meter tethers (dB) | | Option -083, 5 meter tethers (dB) | |
|--------------------|-----------------------------------|---------|-----------------------------------|---------|
| | Standard | Typical | Standard | Typical |
| 55 GHz to 60 GHz | - | 97 | - | 97 |
| > 60 GHz to 67 GHz | 106 | 112 | 106 | 111 |
| > 67 GHz to 83 GHz | 110 | 118 | 110 | 118 |
| > 83 GHz to 87 GHz | 110 | 118 | 98 | 104 |
| > 87 GHz to 90 GHz | 98 | 111 | 98 | 104 |
| > 90 GHz to 92 GHz | - | 102 | - | 102 |

High Level Noise

Measured at 100 Hz IF bandwidth and at default power level, RMS. Performance is typical.

| Frequency | Magnitude (dB) | Phase (deg) |
|------------------|----------------|-------------|
| 60 GHz to 90 GHz | 0.004 | 0.06 |

Output Power Range

Minimum to maximum rated leveled output power. Performance is typical

| Frequency | Standard (dBm) |
|--------------------|----------------|
| 60 GHz to 69 GHz | -55 to -5 |
| > 69 GHz to 88 GHz | -50 to 0 |
| > 88 GHz to 90 GHz | -60 to -10 |

Power Accuracy



Accuracy is defined at maximum rated power -5 dB. Performance is typical

| Frequency | Accuracy (dB) | Resolution (dB) |
|------------------|---------------|-----------------|
| 60 GHz to 90 GHz | ±2.0 | 0.01 |

Mechanical Stability

Ratioed measurement, with ports connected. Tested with pictured fixture ~18 inches in front of chassis with modules moving 100 mm and 15 degrees as shown. Applies to MS46522B-082 >= revision 3 and MS46522B-083 >= revision 1. Typical.

| Frequency | Magnitude | Phase |
|--------------|-----------|--------------|
| 60 to 90 GHz | ±0.1 dB | ±3.0 degrees |

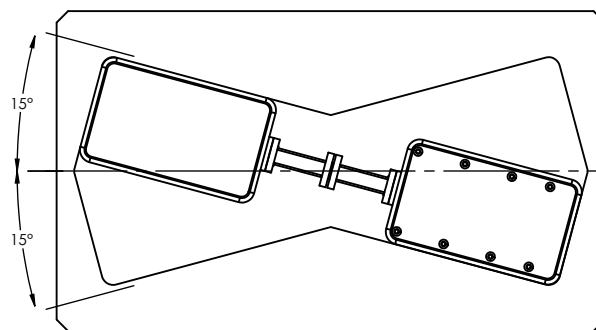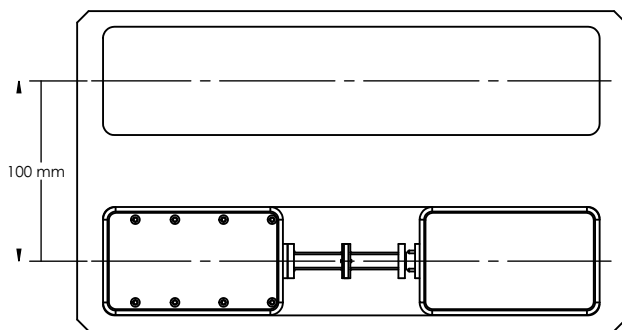

1. Option -082 supports the ability to turn off the unused test receiver during s-parameter measurements (Spur Reduction) to reduce spurious signals reflected back from highly reflective DUTs like deep stop-band filters. Option -083 does not support this functionality.

MS46522B-082 and MS46522B-083 E-Band VNA System Performance with Waveguide Cal Kit

Error-Corrected Specifications


With 12-term SSLT Calibration using the 3655E WR12 Waveguide Calibration Kit. Typical.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 60 GHz to 63 GHz | > 36 | > 31 | > 36 | ±0.10 | ±0.10 |
| > 63 GHz to 67 GHz | ≥ 45 | ≥ 29 | ≥ 45 | ±0.10 | ±0.10 |
| > 67 GHz to 71 GHz | ≥ 47 | ≥ 31 | ≥ 47 | ±0.10 | ±0.10 |
| > 71 GHz to 75 GHz | ≥ 42 | ≥ 33 | ≥ 42 | ±0.10 | ±0.10 |
| > 75 GHz to 79 GHz | ≥ 40 | ≥ 36 | ≥ 40 | ±0.10 | ±0.10 |
| > 79 GHz to 83 GHz | ≥ 44 | ≥ 36 | ≥ 44 | ±0.10 | ±0.10 |
| > 83 GHz to 87 GHz | ≥ 44 | ≥ 42 | ≥ 44 | ±0.10 | ±0.10 |
| > 87 GHz to 90 GHz | ≥ 41 | ≥ 40 | ≥ 41 | ±0.10 | ±0.10 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

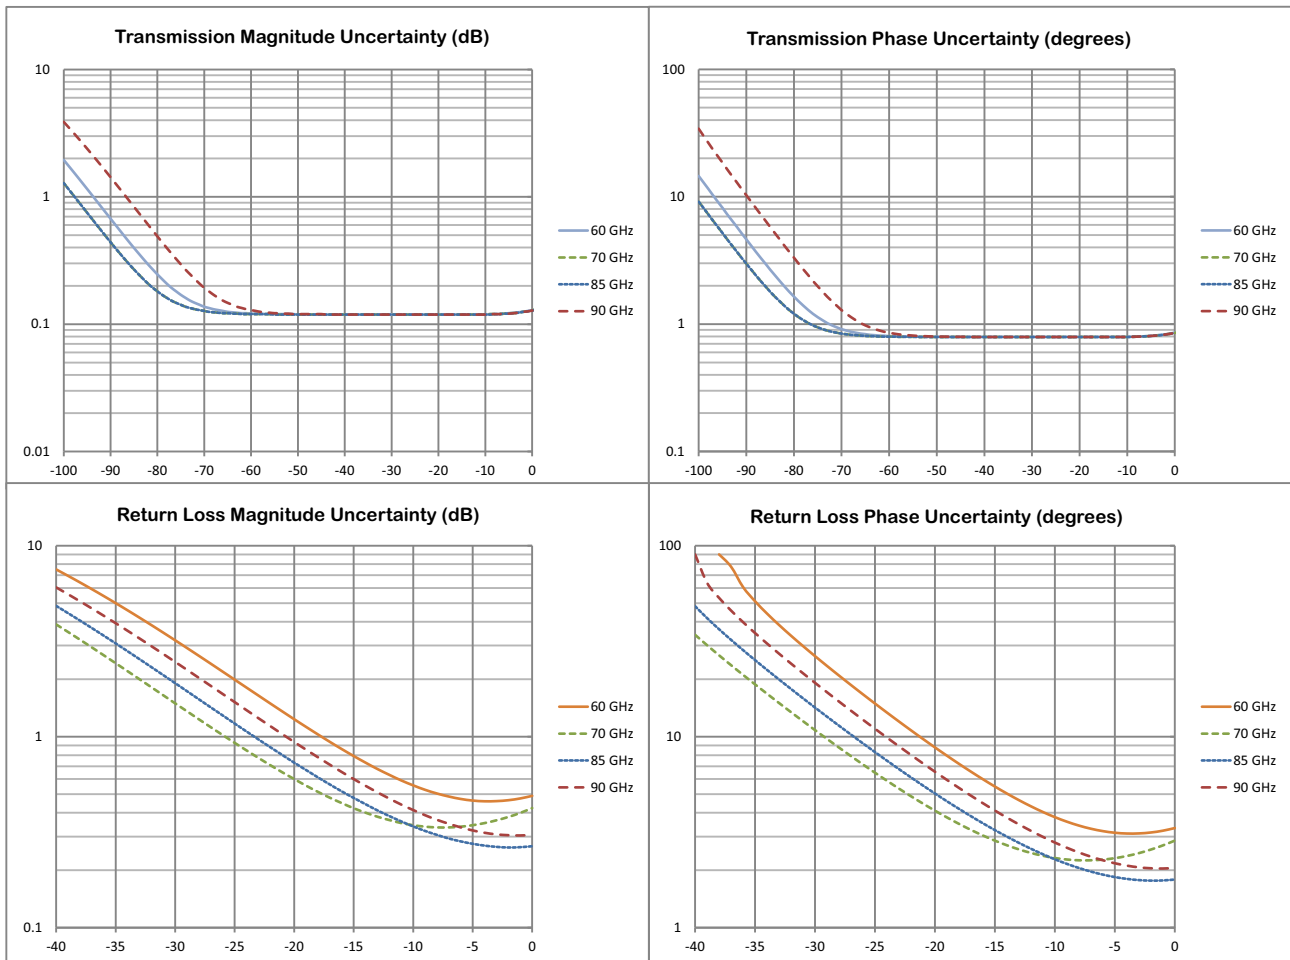

Measurement Throughput Summary

Cycle Time for Measurement Completion (ms)

Number of traces = 1; system error correction on. Includes retrace time. Typical performance data.

| Number of Points | 500 kHz IF Bandwidth | | | | 1 kHz IF Bandwidth | | | |
|------------------------------------|----------------------|-----|-----|------|--------------------|-----|-----|------|
| | 51 | 201 | 401 | 1601 | 51 | 201 | 401 | 1601 |
| Start 1 GHz, stop 1.2 GHz | | | | | | | | |
| Uncorrected | 2 | 4 | 8 | 33 | 56 | 213 | 422 | 1679 |
| 2-Port Cal | 4 | 12 | 25 | 90 | 114 | 427 | 846 | 3360 |
| Start 50 kHz, stop 8 GHz | | | | | | | | |
| Uncorrected | 4 | 7 | 12 | 37 | 57 | 215 | 424 | 1681 |
| 2-Port Cal | 8 | 16 | 26 | 94 | 118 | 431 | 851 | 3367 |
| Start 19 GHz, stop 20 GHz | | | | | | | | |
| Uncorrected | 2 | 7 | 14 | 52 | 56 | 216 | 431 | 1720 |
| 2-Port Cal | 14 | 24 | 38 | 114 | 121 | 440 | 865 | 3440 |
| Start 50 kHz, stop 43.5 GHz | | | | | | | | |
| Uncorrected | 44 | 51 | 60 | 106 | 97 | 267 | 471 | 1753 |
| 2-Port Cal | 89 | 104 | 120 | 214 | 197 | 515 | 948 | 3520 |

Data Transfer Time (ms)

Transferred complex S11 data, using "CALC:DATA:SDATA?" command. Typical performance data.^a

| Number of Points | 51 | 201 | 401 | 1601 |
|----------------------|----|-----|-----|------|
| SCPI over LAN | | | | |
| REAL 64 | 4 | 4 | 4 | 8 |
| REAL 32 | 4 | 4 | 4 | 8 |
| ASCII | 4 | 4 | 4 | 16 |

a. Data transfer time varies depending on the PC and control software used with the VNA.

Standard Capabilities

Operating Frequencies

| | |
|--------------|--------------------------------------|
| MS46522B-010 | 50 kHz to 8.5 GHz |
| MS46522B-020 | 50 kHz to 20 GHz |
| MS46522B-043 | 50 kHz to 43.5 GHz |
| MS46522B-082 | 55 GHz to 92 GHz, one meter tethers |
| MS46522B-083 | 55 GHz to 92 GHz, five meter tethers |

Measurement Parameters

| | |
|---------------------|--|
| 2-Port Measurements | S_{11} , S_{21} , S_{22} , S_{12} , and any user-defined combination of a_1 , a_2 , b_1 , b_2 , 1 Maximum Efficiency Analysis, Mixed-mode SDD, SDC, SCD, SCC |
| Domains | Frequency Domain, Time (Distance) Domain (Option 2), Power Domain |

Sweeps

| | |
|-----------------------|---|
| Sweep Configurations | Standard or Simultaneous (MS46522B-010 option only) |
| Frequency Sweep Types | Linear, Log, CW, or Segmented |
| Power Sweep Types | Linear |

Display Graphs

| | |
|--------------------------------|---|
| Single Rectilinear Graph Types | Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, Impedance, KQ and η Max |
| Dual Rectilinear Graph Types | Log Mag and Phase, Linear Mag and Phase, Real and Imaginary, KQ and η Max |
| Circular Graph Types | Smith Chart (Impedance), Polar |

Measurements Data Points

| | |
|---------------------|--------------------|
| Maximum Data Points | 2 to 20,001 points |
|---------------------|--------------------|

Limit Lines

| | |
|-----------------------|--|
| Limit Lines | Single or segmented. 2 limit lines per trace. 50 segments per trace. |
| Single Limit Readouts | Uses interpolation to determine the intersection frequency. |
| Test Limits | Both single and segmented limits can be used for PASS/FAIL testing. |

Ripple Limit Lines

| | |
|--------------|--|
| Limit Lines | Single or segmented. 2 limit lines per trace. 50 segments per trace. |
| Ripple Value | Absolute Value or Margin |
| Test Limits | Both single and segmented limits can be used for PASS/FAIL testing. |

| | | | |
|--------------------------------------|----------------------|--|--|
| Averaging | | Point-by-Point Sweep-by-Sweep | Point-by-point (default), maximum number of averages = 4096 Sweep-by-sweep, maximum number of averages = 4096 |
| IF Bandwidth | | | 10, 20, 30, 50, 70, 100, 200, 300, 500, 700 Hz 1, 2, 3, 5, 7, 10, 20, 30, 70, 100, 200, 300, 500 kHz |
| Reference Plane | | Line Length or Time Delay | The reference planes of a calibration or other normalization can be changed by entering a line length or time delay. |
| | Dielectric Constants | | Dielectric constants may be entered for different media so the length entry can be physically meaningful. |
| | Dispersion Modeling | | Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities. |
| | Attenuation | | Attenuation (with frequency slope) and constant phase offsets can be entered to better describe any reference plane distortions. The frequency dependence exponent is changeable. |
| | Auto Modes | | Automatic reference plane finding tools are available for phase alone or phase + magnitude. These routines do a fitting process on phase or phase and magnitude to estimate the reference plane location and enter correcting values. |
| | De-embedding | | For more complete reference plane manipulation, the full de-embedding system can also be used. |
| Measurement Frequency Range | | Frequency Range Change CW Mode Interpolation Not Activated Interpolation Activated | Frequency range of the measurement can be narrowed within the calibration range without recalibration. CW mode permits single frequency measurements also without recalibration. If interpolation is not activated, the subset frequency range is forced to use calibration frequency points. If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error. |
| Group Delay | | Group Delay Aperture Aperture Minimum Aperture Group Delay Range | Defined as the frequency span over which the phase change is computed at a given frequency point. The aperture can be changed without recalibration. The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range. < 180° of phase change within the aperture |
| Channels, Display, and Traces | | Channels and Traces Display Colors Trace Memory Trace Math | 16 channels, each with up to 16 traces Unlimited colors for data traces, memory, text, markers, graticules, and limit lines A separate memory for each trace can be used to store measurement data for later display or comparison, with current measurement data. Up to 20 data traces per channel can be saved and recalled. Any two traces within the same or different channels can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace. An equation editor mode is also available that allows the combination of trace data, trace memory and S-parameter data in more complex equations. Over 30 built-in functions are available. Simple editing tools and the ability to save/recall equations are also provided. |
| Scale Resolution | | Log Magnitude Linear Magnitude Phase Group Delay Time Distance SWR Power | Minimum per division, varies with graph type. 0.001 dB 10 μU 0.01° 0.1 ps 0.0001 ps 0.1 μm 10 μU 0.001 dB |
| Markers | | Markers Marker Coupling Marker Overlay Marker Data Reference Marker Marker Statistics Marker Search and Tracking | 12 markers + 1 reference marker per trace Coupled or decoupled Display markers on active trace only or on all traces when multiple trace responses are present on the same trace Data displayed in graph area or in table form Additional marker per trace for reference Mean, maximum, minimum, standard deviation Per trace or over a marker region Search and/or track for minimum, maximum, peak, or target value. Multiple marker search ranges per trace are available. |
| Other | | Filter Parameters S-Parameter Conversion | Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors. Z Reflection Impedance Z Transmission Impedance Y Reflection Admittance Y Transmission Admittance 1/S |

Calibration and Correction Capabilities

| | |
|---|--|
| Calibration Methods | <p>Short-Open-Load-Through (SOLT) Short-Open-Load-Reciprocal (SOLR) Offset-Short-Offset-Short-Load-Through (SSLT) Triple-Offset-Short-Through (SSST) Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM) Source Calibration Receiver Calibration SmartCal™, AutoCal™ Thru Update available Secondary match correction available for improved low insertion loss measurements</p> |
| Correction Models | <p>2-Port (Forward, Reverse, or both directions) 1-Port (S_{11}, S_{22}, or both) Transmission Frequency Response (Forward, Reverse, or both directions) Reflection Frequency Response (S_{11}, S_{22}, or both)</p> |
| Coefficients for Calibration Standards | <p>Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files. Use predefined coefficients for Anritsu calibration kits in ShockLine software. Enter coefficients into user-defined locations. Use complex load models.</p> |
| Interpolation | Allows interpolation between calibration frequency points. |
| Adapter Removal Calibration | Characterizes and “removes” an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices. |
| Dispersion Compensation | Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip |
| Power | |
| Power Meter Correction | Different power meter calibrations are available to enhance power accuracy at the desired reference plane. The source power will match the target calibration power, as read by the power meter, to within ~0.1 dB for short periods of time (determined by thermal drift of the system and the power meter). The absolute accuracy of the calibrated power will be dependent on the power meter and sensor used. |
| Flat Power Calibrations | A flat power calibration (when in frequency sweep mode) is available at a user-selectable power level, if it is within the power adjustment range of the internal source. The flat power correction is applied to other power levels. |
| Linear Power Calibrations | A linear power calibration is performed over a range of power levels for use in power sweep mode and is performed at a specified frequency or frequency range. |
| External Power Meter | Both calibrations are performed using an external USB power sensor (Anritsu MA24106A, MA24108A, MA24118A, MA24126A, MA24330A, MA24340A, MA24350A) over a USB 2.0 port. |
| Embedding/De-embedding | The MS46522B is equipped with an Embedding/De-embedding system. |
| De-embedding | De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements. |
| Embedding | Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement. |
| Multiple Networks | Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily. |
| Extraction Utility | An extraction utility is part of this package that allows easier computation of de-embedding files based on additional calibration steps and measurements. |
| Optical/Electrical Conversion | |
| O/E, E/O, & O/O | O/E, E/O, and O/O setup wizards are provided |
| Impedance Conversion | Allows entry of different reference impedances (complex values) for different ports |

Optional Capabilities


| | |
|--|---|
| Time Domain Measurements, Option 2 | Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate. |
| Advanced Time Domain Measurements, Option 22 | The ATD option has two basic elements. The first element is an Eye Diagram automatically created from a stored .SnP data file after launching the ADK software. The second element accesses the following functions: Check Passivity and Causality, Combine .SnP Files, Plot Eye Diagram, Plot Crosstalk, Plot TDT/TDR/Skew, and Perform Compliance Test. Option 2 recommended with Option 22, but is not required. |
| Universal Fixture Extraction, Option 24 | Provides a suite of additional network extraction techniques for different de-embedding problems, particularly those when only partial interface information is available at the DUT plane. These are often useful for on-wafer and fixtured environments with more complex DUT interfaces where traditional standards may not be available. In most cases, .s1p definition/model of reflect standards is allowed and generally automatic fixture length detection is available. In addition, a sequential extraction (peeling) of isolated fixture defects is possible and allows one to generate sNp files for portions of the fixture for design analysis. |

Remote Operability

ShockLine supports several remote operability options.

| Communication Type | Data Format | Performance | Description |
|--------------------|---|------------------------------------|-------------------|
| Via LAN | Using VXI-11 Protocol | Gigabit Data Transfer Speed | Use SCPI commands |
| Drivers for LAN | IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python programming environments. | | |
| Triggering | Start Trigger | Software and digital edge | |
| | Input Range | +3.3 V logic level (+5 V tolerant) | |
| | Minimum Trigger Width | 50 ns | |
| | Trigger Delay | 6 μs, typical | |

Front Panel Connections

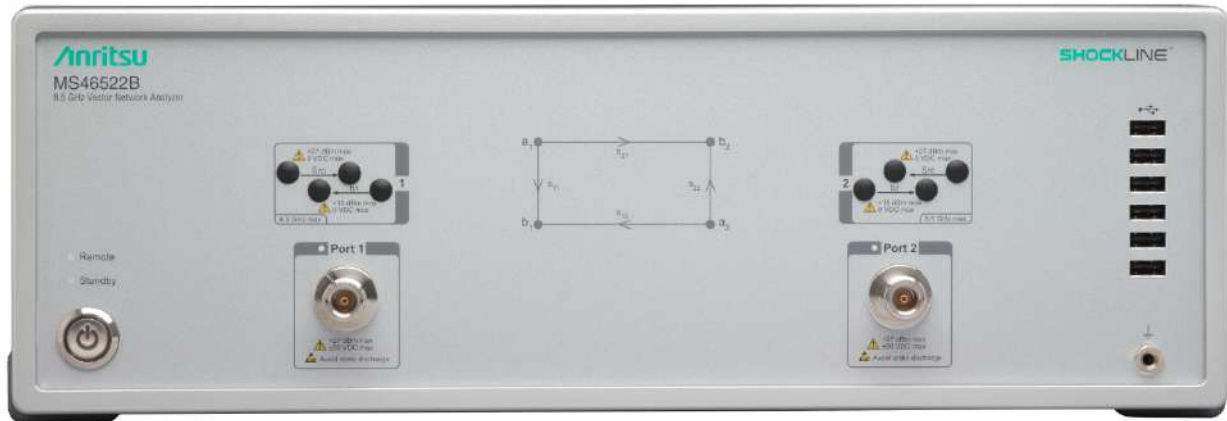

MS46522B Front Panel (8.5 GHz model shown)

Test Ports 1 and 2

| | |
|---------------------|---------------------------------|
| MS46522B-010 | N(f) |
| MS46522B-020 | K(m) |
| MS46522B-043 | Extended-K™(m) |
| MS46522B-082 | WR12 Waveguide Flange |
| MS46522B-083 | WR12 Waveguide Flange |
| Damage Input Levels | +27 dBm maximum, 50 VDC maximum |

USB Ports

Six type A USB 2.0 Ports for peripherals such as keyboard, mouse, memory stick, hardware key, and similar devices.

Chassis Grounding Port

Banana(f)

Rear Panel Connections



MS46522B Rear Panel

| | | |
|--|-----------------------|--|
| AC Power Input | | AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 to 63 Hz (power factor controlled) |
| USB and LAN | | |
| | USB Ports | Four type A USB 3.0 for peripherals such as keyboard, mouse, memory stick, USB monitor, and hardware key. |
| | LAN Port | Gigabit Ethernet |
| Media | | |
| | HDMI and Display Port | Video output, touchscreen compatible |
| | Audio | External stereo speaker and microphone (3.5 mm) |
| 10 MHz In | | |
| | Connector Type | BNC(f) |
| | Signal | +0 dBm, typical; 50 Ω, nominal |
| 10 MHz Out | | |
| | Connector Type | BNC(f) |
| | Signal | +8 dBm, typical; 50 Ω, nominal |
| External Trigger Input | | |
| | Connector Type | BNC(f) |
| | Voltage Input | 0 to 3.3 V input (5 V tolerant) |
| | Impedance | High impedance (> 100 kΩ) |
| | Pulse Width | 50 ns minimum input pulse width |
| | Trigger Delay | 6 μs typical |
| External Trigger Output | | |
| | Connector type | BNC(f) |
| | Voltage Output | 0 to 3.3 V (HCMOS logic) |
| | Drive Current | 24 mA maximum |
| | Pulse Width | 1 μs, typical |
| Bias Inputs (Only available with Option 10) | | |
| | Connector | BNC(f) (one input per port); 50 VDC maximum, 0.5 A maximum |
| | Required | Frequency Option 10 |

CPU, Memory, and Security Features

| | |
|-------------------|---|
| CPU | Intel Core™ i5 |
| Storage | Serial-ATA (SATA) Solid State Drive for OS, Programs, and Data (> 30 GB). |
| Security Features | If the VNA is attached to a network, best practices recommend installing anti-virus software. |

Mechanical

| | |
|-------------------|--|
| Dimensions | Dimensions listed are for the instrument body only, without rack mount option attached. |
| H x W x D | 152 mm (5.98 in.) x 445 mm (17.52 in.) x 442 mm (17.4 in.) |
| Weight | <ul style="list-style-type: none"> < 11 kg (< 25 lb), typical weight for a fully-loaded MS46522B-010 VNA < 13 kg (< 28 lb), typical weight for a fully-loaded MS46522B-020 or MS46522B-043 VNA < 14 kg (< 31 lb), typical weight for a fully loaded MS46522B-082 including tethers < 15 kg (< 33 lb), typical weight for a fully loaded MS46522B-083 including tethers |

Regulatory Compliance

| | |
|---------------------------|--|
| European Union | EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU applies to instruments with CE marking placed on the market after July 22, 2017 |
| Australia and New Zealand | RCM AS/NZS 4417:2012 |
| South Korea | KCC-REM-A21-0004 |

Environmental

| | |
|--|--|
| MIL-PRF-28800F Class 3 (vibration and shock do not apply to Option 82 and Option 83 instruments) | |
| Operating Temperature Range | 0 °C to 50 °C |
| Storage Temperature Range | -40 °C to 71 °C |
| Maximum Relative Humidity | 95 % RH at 30 °C, non-condensing |
| Vibration, Sinusoidal | 5 Hz to 55 Hz |
| Vibration, Random | 10 Hz to 500 Hz |
| Half Sine Shock | 30 g _n |
| Altitude | 4600 meters, operating and non-operating |

Warranty

| | |
|---------------------------------|---|
| Instrument and Built-In Options | 3 years from the date of shipment (standard warranty) |
| Calibration Kits | Typically 1 year from the date of shipment |
| Test Port Cables | Typically 1 year from the date of shipment |
| Warranty Options | Additional warranty available |

Ordering Information

| | | |
|---|---|--|
| Instrument Models | | |
| MS46522B | ShockLine 2-Port Vector Network Analyzer (base model) | |
| Requires One Frequency Option | | |
| MS46522B-010 | 50 kHz to 8.5 GHz, type N(f) ports | |
| MS46522B-020 | 50 kHz to 20 GHz, type K(m) Ruggedized ports (compatible with 3.5 mm and SMA connectors) | |
| MS46522B-043 | 50 kHz to 43.5 GHz, type Extended-K™(m) Ruggedized ports (compatible with standard K (2.92 mm), 3.5 mm, and SMA connectors) | |
| MS46522B-082 | 55 GHz to 92 GHz, WR12 waveguide flange, one meter tethers | |
| MS46522B-083 | 55 GHz to 92 GHz, WR12 waveguide flange, five meter tethers | |
| Included Accessories | | |
| Each VNA comes with a power cord and instructions on where to download software and related literature. | | |
| Main VNA Options | | |
| MS46522B-001 | Rack Mount, adds handles and removes feet for shelf-mounting into a 19 inch universal rack | |
| MS46522B-002 | Time Domain with Time Gating | |
| MS46522B-022 | Advanced Time Domain | |
| MS46522B-024 | Universal Fixture Extraction | |
| MS46522B-061 | Bias Tee (Only available with Option 10) | |
| Calibration Options (not available for the MS46522B-082 and MS46522B-083) | | |
| MS46522B-097 | Accredited Calibration, with data | |
| MS46522B-098 | Standard Calibration, ISO 17025 compliant, without data | |
| MS46522B-099 | Premium Calibration, ISO 17025 compliant, with data | |
| O/E Calibration Module | | |
| MN4765B-0040 | Configured for 70 kHz to 40 GHz range, with 850 nm wavelength coverage | |
| MN4765B-0042 | Configured for 70 kHz to 40 GHz range, with 850 and 1060 nm wavelength coverage | |
| MN4765B-0043 | Configured for 70 kHz to 40 GHz range, with 850/1060/1310/1550 nm wavelength coverage | |
| MN4765B-0070 | Configured for 70 kHz to 70 GHz range, with 1550 nm wavelength coverage | |
| MN4765B-0071 | Configured for 70 kHz to 70 GHz range, with 1310 nm wavelength coverage | |
| MN4765B-0072 | Configured for 70 kHz to 70 GHz range, with 1310 and 1550 nm wavelength coverage | |
| MN4765B-0110 | Configured for 70 kHz to 110 GHz range, with 1550 nm wavelength coverage | |
| E/O Converter | | |
| MN4775A-0040 | 40 GHz modulation bandwidth and internal 850 nm laser | |
| MN4775A-0070 | 70 GHz modulation bandwidth and internal C-band laser set to 1550 nm | |
| MN4775A-0071 | 70 GHz modulation bandwidth and internal 1310 fixed lase | |
| Precision Automatic Calibrator Modules | | |
| MN25208A | 2-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with connector Options -001 N(f), -002 K(f), -003 3.5 mm(f)) | |
| MN25408A | 4-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with connector Options -001 N(f), -002 K(f), -003 3.5 mm(f)) | |
| MN25218A ¹ | 2-port USB SmartCal Module, 300 kHz to 20 GHz (available with connector Option -002 K(f)) | |
| MN25418A | 4-port USB SmartCal Module, 300 kHz to 20 GHz (available with connector Option -002 K(f)) | |
| 36585K-2M | K Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m) | |
| 36585K-2F | K Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f) | |
| 36585K-2MF | K Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f) | |
| 2000-1809-R | Serial to USB Adapter (required for use with 36585 AutoCal module) | |

1. Applies to Rev 2 SmartCal Modules. MN25218A with serial numbers <1817999 operate from 1 MHz to 20 GHz.

Mechanical Calibration Kits

| | |
|----------------|--|
| 3650A | SMA/3.5 mm Calibration Kit, Without Sliding Loads, DC to 26.5 GHz, 50 Ω |
| 3650A-1 | SMA/3.5 mm Calibration Kit, With Sliding Loads, DC to 26.5 GHz, 50 Ω |
| 3652A | K Connector Calibration Kit, Without Sliding Loads, DC to 40 GHz, 50 Ω |
| 3652A-1 | K Connector Calibration Kit, With Sliding Loads, DC to 40 GHz, 50 Ω |
| 3653A | N Connector Calibration Kit, Without Sliding Loads, DC to 18 GHz, 50 Ω |
| 3655E | Waveguide Calibration Kit (WR12) |
| OSLN50A-8 | Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| OSLNF50A-8 | Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| TOSLN50A-8 | Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| TOSLNF50A-8 | Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| OSLN50A-18 | Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| OSLNF50A-18 | Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| TOSLN50A-18 | Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| TOSLNF50A-18 | Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| TOSLK50A-20 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω |
| TOSLKF50A-20 | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω |
| TOSLK50A-40 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω |
| TOSLKF50A-40 | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω |
| TOSLK50A-43.5 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 43.5 GHz, 50 Ω Includes .s1p files for data-based calibration support |
| TOSLKF50A-43.5 | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 43.5 GHz, 50 Ω Includes .s1p files for data-based calibration support |

Verification Kit

| | |
|--------|------------------------------|
| 3663-3 | N Connector Verification Kit |
| 3668-4 | K Connector Verification Kit |

USB Power Sensors

| | |
|----------|---|
| MA24106A | True-RMS USB Power Sensor, 50 MHz to 6 GHz |
| MA24108A | True-RMS USB Power Sensor, 10 MHz to 8 GHz |
| MA24118A | True-RMS USB Power Sensor, 10 MHz to 18 GHz |
| MA24126A | True-RMS USB Power Sensor, 10 MHz to 26 GHz |
| MA24330A | Microwave CW USB Power Sensor, 10 MHz to 33 GHz |
| MA24340A | Microwave CW USB Power Sensor, 10 MHz to 40 GHz |
| MA24350A | Microwave CW USB Power Sensor, 10 MHz to 50 GHz |

Cables and Adapters

| | |
|-------------|---|
| N120-6 | RF Cables, Semi-Rigid, N(m) to N(m), 1 each, 0.01 to 18 GHz, 50 Ω , 15 cm (5.9 in) |
| NS120MF-6 | RF Cables, Semi-Rigid, N(f) to N(f), 1 each, 0.01 to 18 GHz, 50 Ω , 15 cm (5.9 in) |
| 1091-26-R | Adapter, SMA(m) to N(m), DC to 18 GHz, 50 Ω |
| 1091-27-R | Adapter, SMA(f) to N(m), DC to 18 GHz, 50 Ω |
| 1091-80-R | Adapter, SMA(m) to N(f), DC to 18 GHz, 50 Ω |
| 1091-81-R | Adapter, SMA(f) to N(f), DC to 18 GHz, 50 Ω |
| 33KK50C | Calibration Grade Adapter, DC to 43.5 GHz, K(m) to K(m), 50 Ω |
| 33KKF50C | Calibration Grade Adapter, DC to 43.5 GHz, K(m) to K(f), 50 Ω |
| 33KFKF50C | Calibration Grade Adapter, DC to 43.5 GHz, K(f) to K(f), 50 Ω |
| 34NN50A | Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω |
| 34NFN50 | Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω |
| 34NK50 | Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω |
| 34NKF50 | Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω |
| 34NFK50 | Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω |
| 34NFKF50 | Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω |
| 34VFK50A | Precision Adapter, DC to 43.5 GHz, V(f) - K(m), 50 Ω |
| 34VFKF50A | Precision Adapter, DC to 43.5 GHz, V(f) - K(f), 50 Ω |
| 34VK50A | Precision Adapter, DC to 43.5 GHz, V(m) - K(m), 50 Ω |
| 34VKF50A | Precision Adapter, DC to 43.5 GHz, V(m) - K(f), 50 Ω |
| K220B | Precision Adapter, K(m) to K(m), DC to 40 GHz, 50 Ω |
| K222B | Precision Adapter, K(f) to K(f), DC to 40 GHz, 50 Ω |
| K224B | Precision Adapter, K(m) to K(f), DC to 40 GHz, 50 Ω |
| SC7260 | WR12 to W1(m) Adapter, W1 (1 mm) to WR12 Waveguide |
| SC7442 | WR12 to W1(f) Adapter, W1 (1 mm) to WR12 Waveguide |
| 35WR12WF-EE | Precision Waveguide to Coax Adapter Kit, 56 GHz to 94 GHz, WR-12 to 1.0 mm(f) |

Test Port Cables, Flexible, Ruggedized, Phase Stable



15 Series Cable Example

| | |
|--------------|---|
| 15NNF50-1.0B | Test Port Cable, Flexible, Phase Stable, 1.0 m (39"), DC to 18 GHz, N(f) to N(m), 50 Ω |
| 15NNF50-1.5B | Test Port Cable, Flexible, Phase Stable, 1.5 m (59"), DC to 18 GHz, N(f) to N(m), 50 Ω |
| 15NN50-1.0B | Test Port Cable, Flexible, Phase Stable, 1.0 m (39"), DC to 18 GHz, N(m) to N(m), 50 Ω |
| 15LL50-1.0A | Test Port Cable, Armored, Phase Stable, 1.0 m (39"), DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 50 Ω |
| 15LLF50-1.0A | Test Port Cable, Armored, Phase Stable, 1.0 m (39"), DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 50 Ω |
| 15KK50-1.0A | Test Port Cable, Armored, Phase Stable, 1.0 m (39"), DC to 20 GHz, K(m) to K(m), 50 Ω |
| 15KKF50-1.0A | Test Port Cable, Armored, Phase Stable, 1.0 m (39"), DC to 20 GHz, K(m) to K(f), 50 Ω |

Phase-Stable 18 GHz and 43.5 GHz Semi-Rigid Cables (Armored)



3670 Series Cable Example

| | |
|------------|---|
| 3670N50-1 | 0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω |
| 3670NN50-1 | 0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω |
| 3670N50-2 | 0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω |
| 3670NN50-2 | 0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω |
| 3670K50A-1 | 0.3 m (12"), DC to 43.5 GHz, K(f) to K(m), 50 Ω |
| 3670K50A-2 | 0.6 m (24"), DC to 43.5 GHz, K(f) to K(m), 50 Ω |

Phase-Stable 20, 40 and 70 GHz Test Port Cables (Flexible)



3671 Series Cable Example

| | |
|---------------|--|
| 3671KFS50-60 | 60 cm (23.6 in), DC to 20 GHz, K (f) to 3.5 mm (m), 50 Ω |
| 3671KFSF50-60 | 60 cm (23.6 in), DC to 20 GHz, K (f) to 3.5 mm (f), 50 Ω |
| 3671KFKF50-60 | 60 cm (23.6 in), DC to 40 GHz, K (f) to K (f), 50 Ω |
| 3671KFK50-100 | 100 cm (39.4 in), DC to 40 GHz, K (f) to K (m), 50 Ω |
| 3671VVF50-60 | 60 cm (23.6 in), DC to 70 GHz, V (f) to V (m), 50 Ω |
| 3671VVF50-60 | 60 cm (23.6 in), DC to 70 GHz, V (f) to V (f), 50 Ω |
| 3671VVF50-100 | 100 cm (39.4 in), DC to 70 GHz, V (f) to V (m), 50 Ω |

Tools

| | |
|------------------|---|
| 01-200 | Calibrated Torque End Wrench, GPC-7 and Type N |
| 01-201 | Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in) (for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors) |
| 01-204 | End Wrench, 5/16 in, Universal, Circular, Open-ended (for SMA, 3.5 mm, 2.4 mm, K, and V connectors) |
| More Information | Refer to our Precision RF & Microwave Components Catalog for descriptions of adapters and other components. |

Documentation

| | |
|--------------------|---|
| User Documentation | Soft copies of the manuals as Adobe Acrobat PDF files are available for download from the instrument model web page at www.anritsu.com . For more information and product support, please contact ShockLineVNA.support@Anritsu.com . |
| 10100-00067 | ShockLine Product Information, Compliance, and Safety |
| 10410-00743 | MS46522B/524B VNA Operation Manual |
| 10410-00744 | MS46522B/524B VNA User Interface Reference Manual |
| 10410-00746 | ShockLine Programming Manual |
| 10410-00753 | MS46522B/524B VNA Calibration and Measurement Guide |

Notes

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Americas Sales Company
450 Century Parkway, Suite 190
Allen, TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.
700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA L td.
200 Capability Green
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

List Revision Date: 20191126

• Sweden

Anritsu AB
Isafjordsgatan 32C
164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S
c/o Regus Fairway, Arne Jacobsens Allé 7, 5th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Russia

Anritsu EMEA Ltd.
Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Moscow 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.
Representation Office in Spain
Paseo de la Castellana, 141.
Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• United Arab Emirates

Anritsu EMEA Ltd.
Dubai Liaison Office
902 Aurora Tower
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited
6th Floor, Indiqube ETA, No.38/4
Adjacent to EMC2, Doddanekundi, Outer Ring Road
Bengaluru 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.
11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.
Room 2701-2705, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.
Unit 1006-7, 10/F.
Greenfield Tower, Concordia Plaza
No. 1 Science Museum Road
Tsim Sha Tsui East, Kowloon
Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Ltd.
5FL, 235 Pangyoeyeok-ro
Bundang-gu, Seongnam-si
Gyeonggi-do 13494, South Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.
Unit 20, 21-35 Ricketts Road
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.
7F, No. 316, Sec. 1, NeiHu Rd. Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817