



PHABRIX®
broadcast excellence

PHABRIX® SxE
Generator/Analyzer/Monitor
EYE AND JITTER + AES



Introducing the next generation from PHABRIX®, representing a huge leap of technology for hand held test and measurement: The new eye and jitter PHABRIX® SxE

The PHABRIX SxE is a revolutionary new product designed to meet the specific demands of both broadcast and manufacturing industries who require eye and jitter measurement. With all the toolsets available in the award winning PHABRIX SxA, the new SxE is a technological marvel.


The ability of the SxE to produce eye patterns from a 3G signal is particularly significant for those users requiring a solution for testing high end products in the 3G arena. The SxE's 3G-SDI, HD-SDI and SD-SDI eye display allow highly detailed measurements to be made. Jitter measurements are among the more important requirements in the design and operation of high-speed serial links and these can be obtained using the SxE's thermometer display for 'go' or 'no-go' SMPTE compliance testing. These comprehensive features propel the SxE into the domain of much more expensive bench bound products.

The SxE's intuitive interface and logical workflow allow the professional engineer to quickly select from the numerous on-board toolsets. Feedback is smooth and interactive clearly displaying eye and jitter waveforms with optional filter selection for timing and alignment measurements on its clear 4.3" 16:9 colour TFT screen.

FEATURE HIGHLIGHTS

- 3 IN 1, GENERATOR / ANALYZER / MONITOR
- EYE MEASUREMENTS
- JITTER MEASUREMENTS
- 3G-SDI, HD-SDI, SD-SDI, AES
- HIGH QUALITY 16:9 PICTURE MONITOR
- SUPERIOR EASE OF USE
- 32+ VIDEO TEST SIGNALS STANDARD
- MOVING ZONE PLATE STANDARD
- TEXT AND LOGO IDENT
- 16 CHANNEL EMBEDDED AUDIO
- AUTO GENLOCK BI/TRI/SDI CROSS LOCK
- 16 CHANNEL AUDIO METERING
- WAVEFORM MONITOR
- VECTORSCOPE
- RUGGED RELIABILITY
- ETHERNET BASED REMOTE OPERATION
- BATTERY + AC POWER SUPPLY



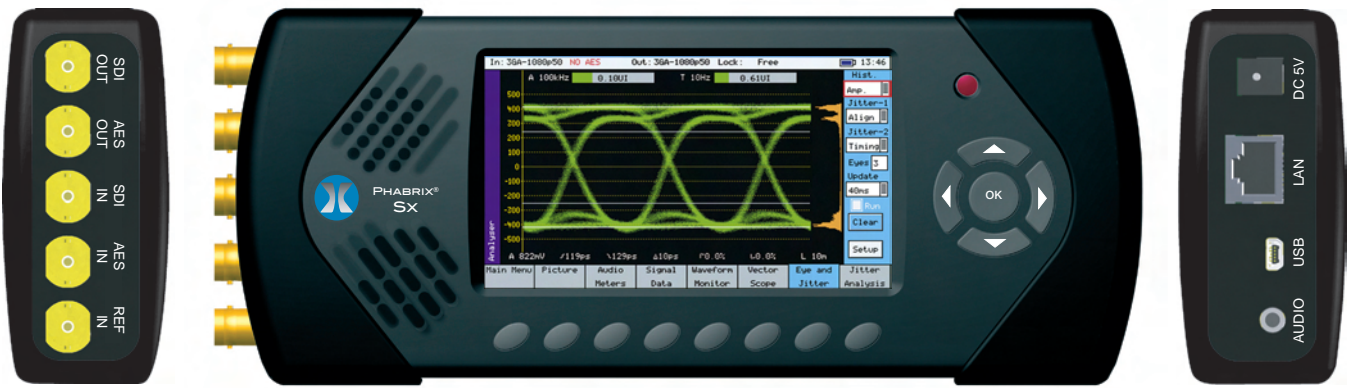

Eye Display with Jitter Thermometers

MONITOR

| | |
|--------------------|---|
| Display resolution | 480 x 272 pixels auto scaling 16:9 24 bit color TFT |
| Display type | 95 x 54 mm |
| Display size | All digital |
| Processing | |

VIDEO

| | |
|-------------------|----------------------------------|
| SDI | 3G-SDI, HD-SDI, SD-SDI |
| Outputs | 1 x 75 Ohm BNC |
| Inputs | 1 x 75 Ohm BNC |
| Genlock | Bi/Tri/SDI with cross lock |
| Adjustable timing | 0 to 1 Frame |
| Text Ident | Yes with font, color, point size |
| Logo ident | Yes |
| EDH | Yes (SD-SDI) |

VIDEO TEST SIGNALS

| | |
|----------------------|--------------------------|
| Resolution | 10 bits |
| Static Test patterns | 32+ including full frame |
| User defined | DPX, YUV, TGA, BMP |
| Zone plate | Yes |

VIDEO INPUT/OUTPUTS

| | |
|-------------------------|--|
| SMPTE formats supported | See www.phabrix.com |
| Eye bit rates | 3Gbps, 1.485Gbps, 270 Mbps |
| Jitter | SMPTE specification filters |
| Jitter thermometers | Alignment, Timing |

AUDIO

| | |
|---------------------------|--|
| Internal speaker | 0.5 watts |
| Audio DAC | 24 bit stereo |
| Headphone socket | 3.5 mm with auto line out |
| Generator/Monitor | 48 kHz 20-bit (SD-SDI) 24-bit (HD-SDI) |
| 16 channel embedded audio | Yes |
| AES output | 1 x 75 Ohm BNC |
| AES onput | 1 x 75 Ohm BNC |

AUDIO TEST SIGNAL


| | |
|------------------------|--------------------------|
| Fixed tones | 17 |
| Variable tones | 1Hz-24Khz in 1Hz steps |
| Intermittent Tone | Yes |
| White noise generation | Yes |
| Audio levels variable | 0 to -100dB in 1dB steps |
| Audio phase invert | Yes |

GENERAL

| | |
|-------------------------|------------------------------|
| Navigation panel | 5 menu keys, 8 custom select |
| Integral battery supply | 3 hours lithium polymer |
| Internal Storage | 1GB (upgradable) |
| Remote control | Web Browser Interface |
| Ethernet/USB | Yes |
| Carry case | Included |
| AC power supply | Included (universal) |
| Security | Kensington™ lock fitting |
| Size | H: 92mm W: 225mm D: 42mm |

PHABRIX® SXE

3 in1 Generator/Analyzer/Monitor with Eye and Jitter

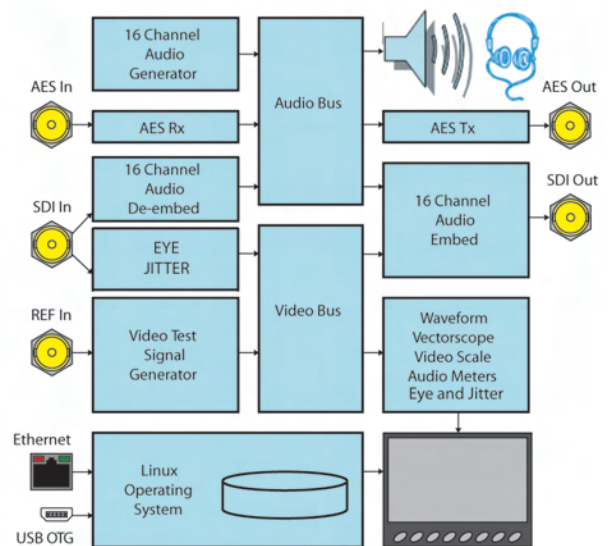

Schematic of the PHABRIX SxE (EYE & JITTER version)



AC Power Supply and Carrying Case as standard

Represented in the Americas by

LEADER

LEADER INSTRUMENTS CORPORATION

Email: Sales@LeaderAmerica.com

Phone: (714) 527-9300

Toll Free: (800) 645-5104

www.LeaderAmerica.com