



Cell Master™

Compact Handheld Base Station Analyzer

MT8213E

2 MHz to 6 GHz

9 kHz to 6 GHz

10 MHz to 6 GHz

Cable & Antenna Analyzer

Spectrum Analyzer

Power Meter



Introduction

Anritsu introduces its latest generation compact handheld Base Station Analyzer for installation and maintenance of wireless networks. Designed as a lightweight base station analyzer meeting virtually all the testing needs of an RF technician, the Cell Master features Signal Analyzer options for 2G, 3G, and 4G cellular networks including LTE, WiMAX, and digital broadcast.

Cable and Antenna Analyzer Highlights

- Measurements: RL, VSWR, Cable Loss, DTF, Phase
- 2-port Transmission Measurement: High/Low Power
- Sweep Speed: 1 ms/data point, typical
- Display: Single or Dual Measurement Touchscreen
- Calibration: OSL, InstaCal™, and FlexCal™
- Bias Tee: 32 V internal

Spectrum and Interference Analyzer Highlights

- Measurements: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI, Interference Mapping
- Dynamic Range: > 102 dB in 1 Hz RBW
- DANL: -162 dBm in 1 Hz RBW
- Phase Noise: -100 dBc/Hz max @ 10 kHz offset at 1 GHz
- Frequency Accuracy: ± 50 ppb with GPS On

Capabilities and Functional Highlights

- CPRI LTE RF measurements
- OBSAI LTE RF measurements
- LTE/LTE-A FDD/TDD; MIMO (2x2, 4x4)
- NB-IoT measurements
- GSM/EDGE
- W-CDMA/HSPA+
- TD-SCDMA/HSPA+
- CDMA, EV-DO
- Fixed, Mobile WiMAX
- EMF Test
- USB Power Sensors up to 50 GHz
- Coverage Mapping
- 3 hour battery operation time
- USB or Ethernet data transfer
- PIM Alert Application
- PIM Hunting
- ISDB-T, ISDB-T SFN
- DVB-T/H, DVB-T/H SFN
- Interference Analyzer
- GPS information on stored traces
- Built-in Bias Tee
- Internal Power Meter
- High Accuracy Power Meter
- Master Software Tools™
- Line Sweep Tools™
- easyTest Tools™
- Web Remote Control with Ethernet

Table of Contents

Definitions	3
Cable and Antenna Analyzer	4
2-Port Transmission Measurement (Option 21)	5
Bias-Tee (Option 10)	5
Spectrum Analyzer	6
Coverage Mapping (Option 431)	8
Electromagnetic Field Test (Option 444)	8
Ethernet Connectivity (formerly Option 413)	8
Interference Analyzer (Option 25)	9
GPS Receiver (Option 31)	9
Channel Scanner (Option 27)	9
CW Signal Generator (Option 28)	9
Gated Sweep (Option 90)	9
Power Meter	10
High Accuracy Power Meter (Option 19)	10
RF over Fiber Hardware (Option 759)	10
CPRI LTE RF Signal Analyzer (Option 752)	11
OBSAI LTE RF Signal Analyzer (Option 753)	13
LTE/LTE-A Signal Analyzers (Options 883 and 886)	14
NB-IoT Analyzer (Option 887)	15
GSM/EDGE Signal Analyzer (Option 880)	15
W-CDMA/HSPA+ Signal Analyzer (Option 881)	16
CDMA Signal Analyzer (Option 884)	17
EV-DO Signal Analyzer (Option 884)	18
Fixed WiMAX Signal Analyzer (Option 885)	19
Mobile WiMAX Signal Analyzer (Option 885)	20
TD-SCDMA/HSPA+ Signal Analyzer (Option 882)	21
ISDB-T Signal Analyzer (Options 30, 79, 32)	22
DVB-T/H Signal Analyzer (Options 64, 57, 78)	23
General Specifications	24
Line Sweep Tools	25
easyTest Tools™	25
easyMap Tools™	25
Master Software Tools	26
Web Remote Control	27
Programmable Remote Control	27
Ordering Information - Options	28
Standard Accessories	29
Manuals	29
Troubleshooting Guides	29
Power Sensors	29
Optional Accessories	30

Definitions

Specifications	All specifications and characteristics apply to Revision 2 ¹ instruments under the following conditions, unless otherwise stated: <ul style="list-style-type: none"> • After 5 minutes of warm-up time, where the instrument is left in the ON state • Sweep Mode set to Performance • When using the internal reference signal
Typical Specifications	Typical specifications are not tested and not warranted. They are generally representative of characteristic performance.
Nominal Calibration Cycle	Design parameters are not tested and not warranted. Recommended calibration cycle is 12 months.
Time Base Error	Input Frequency × Frequency Reference Error

All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com

¹Applies to instruments with serial number ≥ 1609XXX.

 **Cable and Antenna Analyzer**
Measurements

Measurements	VSWR Return Loss Cable Loss Distance-to-Fault (DTF) Return Loss Distance-to-Fault (DTF) VSWR 1-Port Phase Smith Chart (50/75 Ω selectable)
--------------	--

Setup Parameters

Measurement Display	Single/Dual Measurement Display with independent markers
Frequency	Start/Stop, Signal Standard, Start Cal
DTF	Start/Stop, DTF Aid, Units (m/ft), Cable Loss, Propagation Velocity, Cable, Windowing
Windowing	Rectangular, Normal Side Lobe, Low Side Lobe, Minimum Side Lobe
Amplitude	Top, Bottom Auto Scale, Full Scale
Sweep	Run/Hold, Single/Continuous, RF Immunity (High/Low), Data Points, Averaging/Smoothing, Output Power (High/Low), RF Pwr When Hold (On/Off)
Data Points	137, 275, 551, 1102, 2204
Markers	Markers 1-6 (On/Off), Delta Makers 1-6 (On/Off), Marker to Peak/Valley, Peak/Valley Auto, Marker Table (On/Off), All Markers Off
Traces	Recall, Copy to Display Memory, No Trace Math, Trace ± Memory, (Trace + Memory)/2, and Trace Overlay (On/Off)
Limit Line	On/Off, Single Limit, Multi-segment Edit, Limit Alarm (On/Off), Pass Fail Message (On/Off), Pass/Fail (Unbounded/Bounded), Warning Limit Offset, Clear Limit
Calibration	Start Cal, Cal Type (Standard/FlexCal™), Disp Valid Cal Temp Range
Save/Recall	Setups, Measurements, Screen Shots (.jpg) (save only)

Frequency

Frequency Range	2 MHz to 6 GHz
Frequency Accuracy	≤ ± 2.5 ppm @ 25 °C
Frequency Resolution	1 kHz (RF immunity low), 100 kHz (RF immunity high)

Output Power

High	0 dBm, typical
Low	2 MHz to 1.5 GHz: -40 dBm, typical
	>1.5 GHz to 6 GHz: -30 dBm, typical

Interference Immunity

On-Channel	+17 dBm @ > 1.0 MHz from carrier frequency
On-Frequency	0 dBm within ± 10 kHz of the carrier frequency

Measurement Speed

Return Loss	≤ 1.00 ms/data point, RF immunity low, typical
Distance-to-Fault	≤ 1.25 ms/data point, RF immunity low, typical

Return Loss

Measurement Range	0 dB to 60 dB
Resolution	0.01 dB

VSWR

Measurement Range	1:1 to 65:1
Resolution	0.01

Cable Loss

Measurement Range	0 dB to 30 dB
Resolution	0.01 dB

Distance-to-Fault

Vertical Range Return Loss	0 dB to 60 dB
Vertical Range VSWR	1:1 to 65:1
Fault Resolution (meters)	(1.5 × 10 ⁸ × vp) / ΔF (vp = velocity propagation constant, ΔF is F2-F1 in Hz)
Horizontal Range (meters)	0 to (Data Points-1) × Fault Resolution, to a maximum of 1500 m (4921 ft)

1-Port Phase

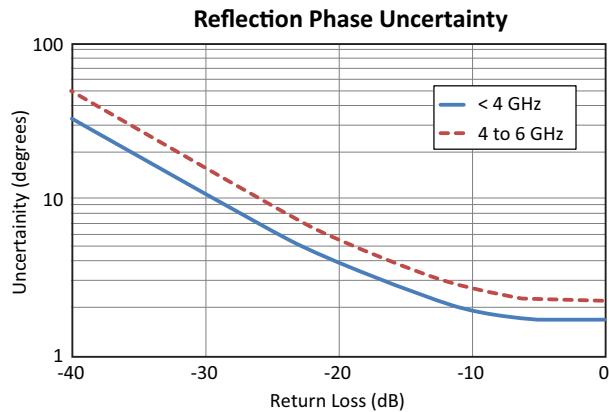
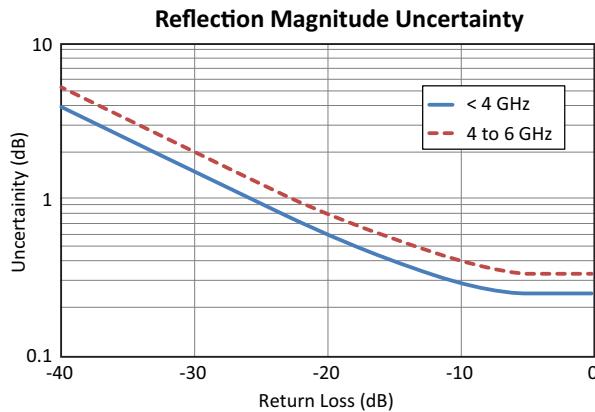
Measurement Range	-180° to +180°
Resolution	0.01°

Smith Chart

Resolution 0.01 50/75 ohm selectable

**Cable and Antenna Analyzer** (continued)**Measurement Accuracy** Corrected

Directivity > 42 dB, OSL Calibration
> 38 dB, InstaCal™ Calibration

Measurement Uncertainty**2-Port Transmission Measurement (Option 21)****Frequency**

Frequency Range 2 MHz to 6 GHz
Frequency Resolution 10 Hz

Output Power

High 0 dBm, typical
Low 2 MHz to 1.5 GHz: -40 dBm, typical
>1.5 GHz to 4/6 GHz: -30 dBm, typical

High Dynamic Range (On)

2 MHz to 4 GHz 80 dB, 95 dB, typical
4 GHz to 6 GHz 70 dB, 85 dB, typical
Application Options Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

Bias-Tee (Option 10)

Setup On/Off, Voltage, Current (Low/High)
Voltage Range +12 V to +32 V
Current (Low/High) 250 mA/450 mA, 1 A surge for 100 ms
Resolution 0.1 V



Spectrum Analyzer

Measurements

Smart Measurements	Field Strength (uses antenna calibration tables to measure dBm/m ² , dBmV/m, dBV/m, dB μ V/m, Volt/m, Watt/m ² , dBW/m ² , A/m, dBA/m and Watt/cm ²) Occupied Bandwidth (measures 99 % to 1 % power channel of a signal) Channel Power (measures the total power in a specified bandwidth) ACPR (adjacent channel power ratio) AM/FM/SSB Demodulation (wide/narrow FM, USB and LSB), (audio out only) C/I (carrier-to-interference ratio) Emission Mask Coverage Mapping (requires Option 431) PIM Alert Application (available for download) PIM Hunting
--------------------	---

Setup Parameters

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Save-on-Event, Recall, Copy, Delete
Save	Setups, Measurements, Screen Shots (JPEG), Limit Lines, Spurious Emission Mask
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Recall	Setups, Measurements, Limit Lines, Spurious Emission Mask
Copy	Selected file or files to internal/external memory (USB)
Delete	Selected file or files from internal/external memory (USB)
Application Options	Bias-Tee (On/Off), Impedance (50 Ω , 75 Ω , Other)

Sweep Functions

Sweep	Single/Continuous, Sweep Mode (Fast, Performance, No FFT), Reset, Detection, Minimum Sweep Time, Trigger Type, Gated Sweep (see Option 90)
Detection	Peak, RMS, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Change Position, Manual

Trace Functions

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A \rightarrow B, B \leftrightarrow C, Max Hold, Min Hold
Trace C Operations	A \rightarrow C, B \leftrightarrow C, Max Hold, Min Hold, A - B \rightarrow C, B - A \rightarrow C, Relative Reference (dB), Scale

Marker Functions

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude plus delta markers frequency amplitude and offset

Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Points (41 max), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

Frequency

Frequency Range	9 kHz to 6 GHz
Tuning Resolution	1 Hz
Frequency Reference	Aging: ± 1.0 ppm/year Accuracy: ± 1.5 ppm ($25^{\circ}\text{C} \pm 25^{\circ}\text{C}$) + aging, $< \pm 50$ ppb with GPS On
Frequency Span	10 Hz to 6 GHz including zero span
Sweep Time	Minimum 100 ms, 7 μ s to 3600 s in zero span
Sweep Time Accuracy	± 2 % in zero span

Bandwidth

Resolution Bandwidth (RBW)	1 Hz to 3 MHz in 1-3 sequence $\pm 10\%$ (1 MHz max in zero-span) (-3 dB bandwidth)
Video Bandwidth (VBW)	1 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth)
RBW with Quasi-Peak Detection	200 Hz, 9 kHz, 120 kHz (-6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1

 **Spectrum Analyzer** (continued)
Spectral Purity

SSB Phase Noise @ 1 GHz	-100 dBc/Hz, -110 dBc/Hz typical @ 10 kHz offset -105 dBc/Hz, -112 dBc/Hz typical @ 100 kHz offset -115 dBc/Hz, -121 dBc/Hz typical @ 1 MHz offset
-------------------------	--

Amplitude Ranges

Dynamic Range	> 102 dB (2.4 GHz), 2/3 (TOI-DANL) in 1 Hz RBW
Measurement Range	DANL to +26 dBm (\geq 50 MHz) DANL to 0 dBm ($<$ 50 MHz)
Display Range	1 dB to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-150 dBm to +30 dBm
Maximum Continuous Input Power	+30 dBm
Attenuator Range	0 dB to 55 dB in 5 dB steps
Amplitude Units	Log Scale Modes: dBW, dBm, dB μ W, dBV, dBmV, dB μ V, dBA, dBmA, dB μ A Linear Scale Modes: nV, μ V, mV, V, kV, nW, μ W, mW, W, kW, nA, μ A, mA, A

Amplitude Accuracy

9 kHz to 100 kHz	\pm 2.00 dB typical (Preamp Off)
100 kHz to 4.0 GHz	\pm 1.25 dB, \pm 0.5 dB typical
> 4.0 GHz to 6 GHz	\pm 1.50 dB, \pm 0.5 dB typical

Displayed Average Noise Level (DANL)

(RBW = 1 Hz, 0 dB attenuation)	Preamp Off (Reference Level -20 dBm)		Preamp On (Reference Level -50 dBm)	
	Maximum	Typical	Maximum	Typical
10 MHz to 2.4 GHz	-141 dBm	-146 dBm	-157 dBm	-162 dBm
> 2.4 GHz to 4 GHz	-137 dBm	-141 dBm	-154 dBm	-159 dBm
> 4 GHz to 5 GHz	-134 dBm	-138 dBm	-150 dBm	-155 dBm
> 5 GHz to 6 GHz	-126 dBm	-131 dBm	-143 dBm	-150 dBm

Spurs

Residual Spurious	< -90 dBm (RF input terminated, 0 dB input attenuation, > 10 MHz)
Input-Related Spurious	< -75 dBc (0 dB attenuation, -30 dBm input, span < 1.7 GHz, carrier offset > 4.5 MHz)
Exceptions, typical	< -70 dBc @ < 2.5 GHz, with 2072.5 MHz Input < -68 dBc @ F1 - 280 MHz with F1 Input < -70 dBc @ F1 + 190.5 MHz with F1 Input < -52 dBc @ 7349 - (2F2) MHz, with F2 Input, where F2 < 2437.5 MHz < -55 dBc @ 190.5 ± (F1/2) MHz, where F1 < 1 GHz

Third-Order Intercept (TOI)

800 MHz	Preamp Off (-20 dBm tones 100 kHz apart, 10 dB attenuation) +16 dBm
2400 MHz	+20 dBm
200 MHz to 2200 MHz	+25 dBm, typical
> 2.2 GHz to 5.0 GHz	+28 dBm, typical
> 5.0 GHz to 6.0 GHz	+33 dBm, typical

Second Harmonic Distortion

50 MHz	Preamp Off, 0 dB input attenuation, -30 dBm input -56 dBc
> 50 MHz to 200 MHz	-60 dBc, typical
> 200 MHz to 3000 MHz	-70 dBc, typical

VSWR

2:1, typical

 **Coverage Mapping (Option 431)** (requires Option 31 GPS)
Measurements

Indoor Mapping	RSSI, ACPR
Outdoor Mapping	RSSI, ACPR

Setup Parameters

Frequency	Center/Start/Stop, Span, Freq Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
BW	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/VBW
Measurement Setup	ACPR, RSSI
Point Distance / Time Setup	Repeat Type Time Distance
Save Points Map	Save KML, JPEG, Tab Delimited
Recall Points Map	Recall Map, Recall KML Points only, Recall KML Points with Map, Recall Default Grid

**Electromagnetic Field Test (Option 444)****Measurements**

Setup	Limit lines, axis dwell time, measurement time, auto-logging, measurement units, trace display
Spectrum Analyzer	Field strength is measured
LTE OTA, TD-LTE OTA	P-SS, S-SS, and RS are measured and displayed based on each Cell ID received
W-CDMA OTA	P-CPICH signals are measured and displayed for each Scrambling Code measured
Units	Spectrum Analyzer: dBm/m ² , dBV/m, dBmV/m, dBuV/m, V/m, W/m ² , dBW/m ² , A/m, dBA/m, W/cm ² LTE OTA, TD-LTE OTA: dBm/m ² , V/m, W/m ² W-CDMA OTA: dBm/m ² , V/m, W/m ² , % of Limit (V/m), % of Limit (W/m ²)
Results	Maximum, minimum, and average of all measurements conducted
Display	Measurement status, number of measurements taken, pass/fail indicators

Frequency Range**Supported Antenna**

2000-1800-R	9 kHz to 300 MHz
2000-1792-R	30 MHz to 3 GHz
2000-1791-R	700 MHz to 6 GHz

Modes where EMF Measurements Available

- Spectrum Analyzer
- LTE OTA (Option 883)
- TD-LTE OTA (Option 883)
- W-CDMA OTA (Option 881)

Ethernet Connectivity (formerly Option 413)

Connector	RJ45
LAN Speed	10 Mbps
Mode	Static, DHCP
Static IP settings	IP address Subnet Mask IP Gateway
Remote Control	Remote capability provided with Web Remote Control and SCPI programming
Data Upload	With Line Sweep Tools through Ethernet connection

 **Interference Analyzer (Option 25)**
Measurements

Spectrum	Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power Ratio (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I)
Spectrogram	Collect data up to 72 hours
Received Signal Strength Indicator (RSSI)	Gives visual and aural indication of signal strength Collect data up to 168 hours (one week)
Signal ID	Up to 12 signals Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi) Closest Channel Number Number of Carriers Signal-to-Noise Ratio (SNR) > 10 dB
Interference Mapping	Draw multiple bearings of signal strength from GPS location on on-screen map Pan and Zoom on-screen maps Support for MA2700A Handheld Interference Hunter (see Optional Accessories)
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

 **GPS Receiver (Option 31)** (antenna sold separately)
General

Setup	On/Off, Antenna Voltage 3.3/5.0 V, GPS Info
GPS Time/Location Indicator	Time, Latitude, Longitude and Altitude on display Time, Latitude, Longitude and Altitude with trace storage
High Frequency Accuracy	Spectrum Analyzer, Interference Analyzer, CW Signal Analyzers < ± 50 ppb with GPS On, GPS antenna connected, 3 minutes after satellite lock in selected mode
Connector	SMA, Female

 **Channel Scanner (Option 27)**
General

Number of Channels	1 to 20 Channels
Measurements	Graph/Table, Max Hold (On/5 sec/Off), Frequency/Channel, Current/Maximum, Single/Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Customer List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Frequency Range	9 kHz to 6 GHz
Frequency Accuracy	± 10 Hz + Time base error
Measurement Range	-110 dBm to +26 dBm
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

 **CW Signal Generator (Option 28)** (requires CW Signal Generator Kit, P/N 69793)
Setup Parameters

Frequency	Frequency, Signal Standard, Channel Number, Display Setup Help
Amplitude	Power Level (Low/High), Offset (dB)
Frequency Range	2 MHz to 2 GHz
Frequency Reference	Accuracy: ± 1.5 ppm (25 °C ± 25 °C) + aging, < ± 50 ppb with GPS On
Output Power	High 0 dBm typical, Low -30 dBm typical Attenuator (included in kit 69793): 0 to 90 dB in 1 dB steps

Gated Sweep (Option 90)**General**

Mode	Spectrum Analyzer, Sweep
Trigger	External TTL
Setup	Gated Sweep (On/Off) Gate Polarity (Rising, Falling) Gate Delay (0 ms to 65 ms typical) Gate Length (1 µs to 65 ms typical) Zero Span Time

 Power Meter
General

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Full Band
Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	Acquisition Fast/Med/Slow, # of Running Averages
Limits	Limit On/Off, Limit Upper/Lower
Frequency Range	10 MHz to 6 GHz
Span	1 kHz to 100 MHz
Display Range	-140 dBm to +30 dBm, ≤ 40 dB span
Measurement Range	-120 dBm to +26 dBm
Offset Range	0 dB to +100 dB (External Gain or Loss)
VSWR	2:1 typical
Maximum Continuous Input Power	+30 dBm
Accuracy	Same as Spectrum Analyzer
Application Options	Impedance (50 Ω, 75 Ω, Other)

 High Accuracy Power Meter (Option 19) (requires external USB Power Sensor)

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale				
Average	# of Running Averages, Max Hold				
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)				
Limits	Limit On/Off, Limit Upper/Lower				
Power Sensor Model	MA24105A	MA24106A	MA24108A/18A/26A	MA24208A/18A	MA24330A/40A/50A
Description	Inline High Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor	Microwave Universal USB Power Sensor	Microwave CW USB Power Sensor
Frequency Range	350 MHz to 4 GHz	50 MHz to 6 GHz	10 MHz to 8/18/26 GHz	10 MHz to 8/18 GHz	10 MHz to 33/40/50 GHz
Connector	Type N(f), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω (8/18 GHz)	Type N(m), 50 Ω	Type K(m), 50 Ω (33/40 GHz)
			Type K(m), 50 Ω (26 GHz)		Type V(m), 50 Ω (50 GHz)
Dynamic Range	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)	-60 dBm to +20 dBm (1 nW to 100 mW)	-70 dBm to +20 dBm (0.1 nW to 100 mW)
Measurand	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power	True-RMS, Slot Power, Burst Average Power	Average Power
Measurement Uncertainty	± 0.17 dB ^a	± 0.16 dB ^b	± 0.18 dB ^c	± 0.17 dB ^d	± 0.17 dB ^e
Data sheet (for complete specifications)	11410-00621	11410-00424	11410-00504	11410-00841	11410-00906
Notes:	<p>a. Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.</p> <p>b. Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.</p> <p>c. Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.</p> <p>d. Power uncertainty expressed with two sigma confidence level for CW measurement after zero operation. Includes calibration factor and linearity over temperature uncertainties, but not the effects of mismatch, zero set and drift, or noise.</p> <p>e. Includes linearity over temperature uncertainties, but not the effects of calibration factor, mismatch, zero set and drift, and noise.</p>				

RF over Fiber Hardware (Option 759)

Must be ordered with either

Option 752: CPRI LTE RF measurements, or
Option 753: OBSAI LTE RF measurements**Operating Temperature**

Range -10 °C to +45 °C

RF over Fiber Interface

Connector Port Small form factor pluggable (SFP) optical transceiver port

**CPRI LTE RF Signal Analyzer (Option 752)** (requires Option 759)**Measurements** (CPRI RF measurements support LTE technology)

Spectrum	Uplink or Downlink Spectrum
Spectrogram	Collects data up to one week
CPRI Alarms	Signal Level (Tx Power, Rx Power), Signal Loss, LOS, LOF, LSS, Remote LOS, Remote LOF, RAI, SDI, Reset
SFP Data	Reads device information
CPRI IQ Data Capture	Quick Save IQ Data, Playback IQ Data

Setup Parameters

Frequency	Center, Span (Span, Full Span), Signal Standard, Channel #, CF Reference (On/Off) ¹
Amplitude	Reference Level (RL), Scale, RL Offset
Bandwidth	RBW, Auto RBW, VBW, Auto VBW
Measurements	CPRI Configure, CPRI Spectrum, Spectrogram, CPRI Alarms, SFP Data (SFP Info/Compliance Info)
CPRI Configure	SFP Port Configure, Display Configure, AxC Trace Configure
SFP Port Configure	Line Rate, Radio Presets, Auto Detect
Display Configure	Display 1 and 2 CPRI BW, Display Mode (Single, Dual), Active Display
AxC Trace Configure	AxC 1, 2, 3, and 4 (Display, SFP Port, AxC Group, Sampling Rate (Default, Compress))
Radio Presets	Ericsson (Uplink/Downlink), Nokia/ALU (Uplink/Downlink), Huawei (Uplink/Downlink), Samsung (Uplink/Downlink), No Preset, Custom
Custom	IQ Bit Width, IQ Mapping (Method1, Method3), No. of Reserve Bits, Aggregation (On/Off)
Auto Detect	Radio Preset, IQ Bit Width, Reserve Bit, Aggregation, Start Auto Detect

Sweep Functions

Sweep	Single/Continuous, Sweep Once, Sweep 10 Averages
-------	--

Trace Functions (AxC Trace 1 only)

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ← → C, Max Hold, Min Hold
Trace C Operations	A → C, B ← → C, Max Hold, Min Hold, A – B → C, B – A → C, Relative Reference (dB), Scale

Marker Functions (AxC Traces 1 through 4)

Markers	Markers 1-6 On/Off, Delta Marker On/Off, Marker Frequency to Center, Marker Table (On, Large, Off), All Markers Off
Marker Table	Markers 1-6 for frequency and amplitude, plus delta markers frequency offset and amplitude

Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Move, Save/Recall Limit, Limit Alarm On/Off, Default Limit
Limit Line Move	Move Up/Down, to Amplitude

Display Functions

Active Display	Display 1 or 2 (Single Display or Dual Display)
Display Spectrum	Single or Dual
Single Spectrum Display	One, two, three, or four AxC traces displayed (color coded), same CPRI BW for AxC traces
Dual Spectrum Display	Any combination of the four available AxC traces, same CPRI BW per display and AxC trace
Display Spectrogram	Single or Dual
Single Spectrogram Display	One active AxC trace per waterfall display
Dual Spectrogram Display	Any combination of the four available AxC traces may be configured per display
AxC Trace (1, 2, 3, 4)	One active AxC trace per waterfall display
	Display 1, 2, or off
	AxC Group
	Sampling Rate (Default, Compress)

1. CF Reference is available only when Display 1 is active.

**CPRI LTE RF Signal Analyzer (Option 752) (continued)****Bandwidth**

Resolution Bandwidth (RBW)	300 Hz to 1 MHz in 1-3-10 sequence $\pm 10\%$ (-3 dB bandwidth point) typical
Video Bandwidth (VBW)	30 Hz to 1 MHz in 1-3-10 sequence $\pm 10\%$ (-3 dB bandwidth) typical
Line Bit Rate	Line bit rate 1: 614.4 Mbit/s Line bit rate 2: 1228.8 Mbit/s Line bit rate 3: 2457.6 Mbit/s Line bit rate 4: 3072.0 Mbit/s Line bit rate 5: 4915.2 Mbit/s Line bit rate 6: 6144.0 Mbit/s Line bit rate 7: 9830.4 Mbit/s Line bit rate 8: 10137.6 Mbit/s

CPRI Parameters

IQ Sample Width	10 bits, 12 bits, 15 bits, 16 bits
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz
Aggregation	On/Off

**OBSAI LTE RF Signal Analyzer (Option 753)** (requires Option 759)**Measurements** (OBSAI RF measurements support LTE technology)

Spectrum	Uplink or Downlink Spectrum
Spectrogram	Collects data up to one week
OBSAI Alarms	Signal Level (Tx Power, Rx Power), Signal Loss, LOS, LOF
SFP Data	Reads device information

Setup Parameters

Frequency	Center, Span (Span, Full Span), Signal Standard, Channel #, CF Reference (On/Off) ¹
Amplitude	Reference Level (RL), Scale, RL Offset
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, LTE Bandwidth
Measurements	Start OBSAI, OBSAI Configure, OBSAI Spectrum, Spectrogram, OBSAI Alarms, SFP Data (SFP Info/Compliance Info)
Start OBSAI	Scans OBSAI link for active RP3 addresses; detects and sets link rate; configures first RP3 address and displays a Spectrum view.
OBSAI Configure	Link Rate, Display Configure, Carrier Trace Configure
Display Configure	Display 1 and 2 LTE BW, Display Mode (Single, Dual), Active Display
Carrier Trace Configure	Carrier Trace 1 (Display 1, 2, or off; RP3 Address) Carrier Trace 2 (Display 1, 2, or off; RP3 Address) Carrier Trace 3 (Display 1, 2, or off; RP3 Address) Carrier Trace 4 (Display 1, 2, or off; RP3 Address)
RP3 Address	RP3 list populated with Start OBSAI or plug-in of an active link Addresses removed from list upon fiber plug-out or Loss of Signal Address list is empty following power cycle or if no OBSAI carriers are found

Sweep Functions

Sweep	Single/Continuous, Sweep Once, Sweep 10 Averages
-------	--

Trace Functions (Carrier Trace 1 only)

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ← → C, Max Hold, Min Hold
Trace C Operations	A → C, B ← → C, Max Hold, Min Hold, A – B → C, B – A → C, Relative Reference (dB), Scale

Marker Functions (Carrier Traces 1 through 4)

Markers	Markers 1-6 On/Off, Delta On/Off, Marker Freq to Center, Marker Table (On, Large, Off), All Markers Off
Marker Table	Markers 1-6 for frequency and amplitude, plus delta markers frequency offset and amplitude

Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Move, Save/Recall Limit, Limit Alarm On/Off, Default Limit
Limit Line Move	Move Up/Down, to Amplitude

Display Functions

Active Display	Display 1 or 2 (Single Display or Dual Display)
Display Spectrum	Single or Dual
Single Spectrum Display	One, two, three, or four carrier traces displayed (color coded) Trace LTE BW must match display LTE BW to be visible
Dual Spectrum Display	Any combination of the four available carrier traces, same LTE BW per display and carrier trace
Display Spectrogram	Single or Dual
Single Spectrogram Display	One active carrier trace per waterfall display
Dual Spectrogram Display	Any combination of the four available carrier traces may be configured per display One active carrier trace per waterfall display
Carrier Trace (1, 2, 3, 4)	Display 1, 2, or off

Bandwidth

Resolution Bandwidth (RBW)	300 Hz to 1 MHz in 1-3-10 sequence ±10 % (-3 dB bandwidth point) typical
Video Bandwidth (VBW)	30 Hz to 1 MHz in 1-3-10 sequence ±10 % (-3 dB bandwidth) typical
Link Rate	1x: 768.0 Mbit/s 2x: 1536.0 Mbit/s 4x: 3072.0 Mbit/s 8x: 6144.0 Mbit/s
LTE Bandwidth	5 MHz, 10 MHz, 15 MHz ² , 20 MHz

1. CF Reference is available only when Display 1 is active.

2. Only supports Dual Bit Map algorithm for 15 MHz bandwidth signals.

 **LTE/LTE-A Signal Analyzers (Options 883 and 886)¹**
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Power vs. Resource Block (RB)	Scanner	View Pass/Fail Limits
Channel Power	RB Power (PDSCH)	Cell ID (Group, Sector)	All, RF, Modulation
Occupied Bandwidth	Active RBs, Utilization %,	S-SS Power, RSRP, RSRQ, SINR	
Power vs. Time (TDD only)	Channel Power, Cell ID	Dominance	Available Measurements
Frame View	OSTP, Frame EVM by modulation	Modulation Results – On/Off	Channel Power
Sub-Frame View	Constellation	Auto Save - On/Off	Occupied Bandwidth
Total Frame Power	QPSK, 16QAM, 64QAM	Tx Test	ACLR
DwPTS Power	256QAM Demod (Option 886)	Scanner	Frequency Error
Transmit Off Power	Modulation Results	RS Power of MIMO antennas (FDD: 2x2, 4x4) (TDD: 2x2, 4x4)	Carrier Frequency
Cell ID	Ref Signal Power (RS)	Cell ID, Average Power	Dominance
Timing Error	Sync Signal Power (SS)	Delta Power (Max-Min)	EVM peak, rms
ACLR	EVM – rms, peak, max hold	Graph of Antenna Power	Frame EVM, rms
Spectral Emission Mask	Frequency Error – Hz, ppm	Modulation Results – On/Off	Frame EVM by mod type
Category A or B (Opt 1)	Carrier Frequency	Mapping	RS, SS Power
RF Summary	Cell ID	On-screen	RS EVM
	Control Channel Power	S-SS Power, RSRP, RSRQ, or SINR	P-SS, S-SS, Power, EVM
	Bar Graph or Table View	Scanner	PBCH, PCFICH, PHICH, PDCCH Power, EVM
	RS, P-SS, S-SS	Modulation Results – Off	Cell, Group, Sector ID
	PBCH, PCFICH, PHICH, PDCCH	Carrier Aggregation	OSTP
	Total Power (Table View)	Up to 5 component carriers (CC1 to CC5)	Tx Time Alignment
	EVM per Control Channel	CP, MIMO status, RS & SS Power, EVM, Frequency Error, Time Alignment Error, Cell ID	Frame Power (TDD only)
	Tx Time Alignment		DwPTS Power (TDD only)
	Modulation Summary		Transmit Off Power (TDD only)
	Includes EVM by modulation		Timing Error (TDD only)
	Antenna Icons		
	Detects active antennas (1/2)		

Setup Parameters	Frequency	E-UTRA FDD bands 1 – 14, 17 – 21, 23 – 32, 66A (tunable 10 MHz to 4.0 GHz) E-UTRA TDD bands 33 – 44 (tunable 10 MHz to 4.0 GHz) Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
	Bandwidth (MHz)	1.4, 3, 5, 10, 15, 20
	Span (MHz)	Auto, 1.4, 3, 5, 10, 15, 20, 30
	Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
	Sweep	Single/Continuous, Trigger Sweep
	Cyclic Prefix (CP)	Auto, Normal, Extended
	EVM Mode	Auto, PBCH only, Max Hold
	Sync Type	Normal (SS), RS/Cell ID
	Trigger	No Trigger/Ext Trigger, Rising/Falling (TDD Only)
Uplink/Downlink Configuration	0 to 6 (TDD Only)	
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory	
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements	

LTE/LTE-A RF Measurements

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input –50 dBm to +10 dBm) ± 1.5 dB, ± 1.0 dB typical, (RF input –30 dBm to +10 dBm)
---------------------------	--

LTE/LTE-A Modulation Measurements

Frequency Error	± 10 Hz + time base error, 99 % confidence level
Residual EVM (rms) (FDD only)	2.0% typical (E-UTRA Test Model 3.1, RF Input –50 dBm to +10 dBm) for BW ≤ 10 MHz 2.5% typical (E-UTRA Test Model 3.1, RF Input –50 dBm to +10 dBm) for BW > 10 MHz
Residual EVM (rms) (TDD only)	2.0% typical (E-UTRA Test Model 3.1, RF Input –30 dBm to +10 dBm) for BW ≤ 10 MHz 2.5% typical (E-UTRA Test Model 3.1, RF Input –30 dBm to +10 dBm) for BW > 10 MHz

LTE/LTE-A Over-the-Air (OTA) Measurements

Scanner	Six strongest signals if present Auto Save — Sync Signal Power and Modulation Results with GPS information
Tx Test	Scanner — three strongest signals if present RS Power — strongest signal
Mapping	Map On-screen S-SS Power, RSRP, RSRQ, or SINR of Cell ID with strongest signal Scanner — three strongest signals if present Save and Export Mapping data: KML, MTD (tab delimited)
Carrier Aggregation	Up to 5 component carriers specified (CC1 to CC5) Automatic detection of CP and MIMO status for each active CC RS Power & RS Delta Power, SS Power, EVM (peak and rms), Freq Error (Hz & ppm), TAE, Cell ID

1. Requires Option 31 for full functionality.

**NB-IoT Analyzer (Option 887)****Measurements**

NB-IoT Mode Guard Band, Standalone

RF Measurements

Summary Screen	Carrier Frequency Channel Power Occupied Bandwidth NPSS Power NSSS Power NPBCH Power NPDCH or NPDSCH Power Cell ID RSRP RSRQ SINR Spectral Emission Mask Pass/Fail
Channel Spectrum	Spans supported: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz
Spectral Emission Mask	Mask Type: NB-IoT Fixed Summary Table Off/On (Mask Segment; Start, Stop, Peak Frequencies; Power; Power Margin; RBW; Status)

Save/Recall Measurement (.iot), Setup (.stp), Screen Shots (.jpg) to Internal or External Memory

**GSM/EDGE Signal Analyzer (Option 880)****Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Phase Error	There are no additional OTA Measurements.	View Pass/Fail Limits
Channel Power	EVM	RF and Demodulation measurements can be made OTA	GSM, EDGE
Occupied Bandwidth	Origin Offset		Available Measurements
Burst Power	C/I		Channel Power
Average Burst Power	Modulation Type		Occupied Bandwidth
Frequency Error	Magnitude Error		Burst Power
Modulation Type	BSIC (NCC, BCC)		Average Burst Power
BSIC (NCC, BCC)			Frequency Error
Multi-channel Spectrum			Phase Error
Power vs. Time (Frame/Slot)			EVM
Channel Power			Origin Offset
Occupied Bandwidth			C/I
Burst Power			Magnitude Error
Average Burst Power			Script Master™
Frequency Error			
Modulation Type			
BSIC (NCC, BCC)			

Setup Parameters

GSM/EDGE Select	Auto, GSM, EDGE
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements

RF Measurements (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99 % confidence level
Occupied Bandwidth	Bandwidth within which lies 99 % of the power transmitted on a single channel
Burst Power Error	± 1.5 dB, ± 1 dB typical, (-50 dBm to +20 dBm)

Demodulation (temperature range 15 °C to 35 °C)

GMSK Modulation Quality (RMS Phase)	± 1 deg
Measurement Accuracy	1 deg
Residual Error (GMSK)	
8 PSK Modulation Quality (EVM)	± 1.5 %
Measurement Accuracy	2.5 %
Residual Error (8 PSK)	

 W-CDMA/HSPA+ Signal Analyzer (Option 881)¹
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Band Spectrum	Code Domain Power Graph	Scrambling Code Scanner (Six)	View Pass/Fail Limits
Channel Spectrum	P-CPICH Power	Scrambling Codes	All, RF, Demod
Channel Power	Channel Power	CPICH	Available Measurements
Occupied Bandwidth	Noise Floor	EC/IO	Max Output Power
Peak-to-Average Power	EVM	EC	Frequency Error
Spectral Emission Mask	Carrier Feed Through	Pilot Dominance	EVM
Single Carrier ACLR	Peak Code Domain Error	OTA Total Power	CPICH
Multi-carrier ACLR	Carrier Frequency	Multipath Scanner (Six)	Occupied Bandwidth
RF Summary	Frequency Error	Six Multipaths	Spectral Mask
	Control Channel Power	Tau	ACLR
	Abs/Rel/Delta Power	Distance	PCDE
	CPICH, P-CCPCH	RSCP	P-CCPCH
	S-CCPCH, PICH	Relative Power	S-CCPCH
	P-SCH, S-SCH	Multipath Power	Code Spread 3
	HSPA+		PICH
	Power vs. Time		Code 128
	Constellation		Script Master™
	Code Domain Power Table		Test Models
	Code, Status		1 (16), (32), (64)
	EVM, Modulation Type		2
	Power, Code Utilization		3 (16), (32)
	Power Amplifier Capacity		4 (+CPICH), (-CPICH)
	Codogram		5 (2 HS), (4 HS), (8 HS)
	Modulation Summary		

Setup Parameters

Scrambling Code, Threshold	Auto, Manual
User Selectable	Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average
Maximum Spreading Factor	256, 512
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Marker	Six Markers, Table On/Off
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

RF Measurements (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy	± 1.25 dB, ± 0.7 dB typical
Occupied Bandwidth Accuracy	± 100 kHz
Adjacent Channel Leakage Ratio (ACLR)	-54 dB/-59 dB ± 0.8 dB @ 5 MHz/10 MHz offset, typical, 824 MHz to 894 MHz, 1710 MHz to 2170 MHz -54 dB/-57 dB ± 1.0 dB @ 5 MHz/10 MHz offset, typical, 2300 MHz to 2700 MHz

Demodulation (temperature range 15 °C to 35 °C)

W-CDMA Modulations	QPSK, QPSK-DTX (Codecs: AMR 4.75, 5.9, 7.4, 12.2 kbps, DTX 7.4, 12.2 kbps)
HSPA+ Modulations	QPSK, 16QAM, 64QAM
Frequency Error	± 10 Hz + time base error, 99% confidence level
EVM Accuracy	± 2.5 %, 6% ≤ EVM ≤ 25%
Residual EVM	3.25% typical
Code Domain Power	± 0.5 dB for code channel power > -25 dB, 16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3)
CPICH (dBm) Accuracy	± 0.8 dB typical

Over-the-Air (OTA) Measurements

Scrambling Code Scanner	Six strongest Scrambling Codes
Multipath Scanner	Multipath power of six signals relative to strongest pilot

1. Option 31 recommended.

 **CDMA Signal Analyzer (Option 884)¹**
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Code Domain Power Graph	Pilot Scanner (Nine)	View Pass/Fail Limits
Channel Power	Pilot Power	PN	All, RF, Modulation
Occupied Bandwidth	Channel Power	EC/IO	Available Measurements
Peak-to-Average Power	Noise Floor	Tau	Channel Power
Spectral Emission Mask	Rho	Pilot Power	Occupied Bandwidth
Single Carrier ACPR	Carrier Feed Through	Channel Power	Peak-to-Average Power
Multi-carrier ACPR	Tau	Pilot Dominance	Spectral Mask Test
RF Summary	RMS Phase Error	Multipath Scanner (Six)	Frequency Error
	Frequency Error	EC/IO	Channel Frequency
	Abs/Rel/ Power	Tau	Pilot Power
	Pilot	Channel Power	Noise Floor
	Page	Multipath Power	Rho
	Sync	Limit Test – 10 Tests Averaged	Carrier Feed Through
	Q Page	Rho	Tau
	Code Domain Power Table	Adjusted Rho	RMS Phase Error
	Code	Multipath	Code Utilization
	Status	Pilot Dominance	Measured PN
	Power	Pilot Power	Pilot Dominance
	Multiple Codes	Pass/Fail Status	Multipath Power
	Code Utilization		
	Modulation Summary		

Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Number of Carriers	1 to 5
Carrier Bandwidth (MHz)	1.23, 1.24, 1.25
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

RF Measurements (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input –50 dBm to +20 dBm)

Demodulation (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99 % confidence level (in slow mode)
Rho Accuracy	± 0.005, for Rho > 0.9
Residual Rho	> 0.995, typical, > 0.99 maximum, (RF input –50 dBm to +20 dBm)
PN Offset	1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 µs typical, ± 1.0 µs maximum

Over-the-Air (OTA) Measurements

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot
Limit Test	Average of ten tests compared to limit

1. Requires Option 31 for full functionality.

 EV-DO Signal Analyzer (Option 884)¹
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	MAC Code Domain Power Graph	Pilot Scanner (Nine)	View Pass/Fail Limits
Channel Power	Pilot & MAC Power	PN	All, RF, Modulation
Occupied Bandwidth	Channel Power	EC/IO	Available Measurements
Peak-to-Average Power	Frequency Error	Tau	Channel Power
Power vs. Time	Rho Pilot	Pilot Power	Occupied Bandwidth
Pilot & MAC Power	Rho Overall	Channel Power	Peak-to-Average Power
Channel Power	Data Modulation	Pilot Dominance	Carrier Frequency
Frequency Error	Noise Floor	Multipath Scanner (Six)	Frequency Error
Idle Activity	MAC Code Domain Power Table	EC/IO	Spectral Mask
On/Off Ratio	Code	Tau	Noise Floor
Spectral Emission Mask	Status	Channel Power	Pilot Power
Single Carrier ACPR	Power	Multipath Power	RMS Phase Error
Multi-carrier ACPR	Code Utilization		Tau
RF Summary	Data Code Domain Power		Code Utilization
	Active Data Power		Measured PN
	Data Modulation		Pilot Dominance
	Rho Pilot		Multipath Power
	Rho Overall		
	Maximum Data CDP		
	Minimum Data CDP		
	Modulation Summary		

Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Slot Type	Auto, Active, Idle
Number of Carriers	1 to 5
Carrier Bandwidth (MHz)	1.23, 1.24, 1.25
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

RF Measurements (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

Demodulation (temperature range 15 °C to 35 °C)

EV-DO Compatibility	Rev 0 and Rev A
Frequency Error	± 10 Hz + time base error, 99 % confidence level
Rho Accuracy	± 0.01, for Rho > 0.9
Residual Rho	> 0.995 typical, > 0.99, maximum (RF input -50 dBm to +20 dBm)
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 µs typical, ±1.0 µs maximum

Over-the-Air (OTA) Measurements

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot

1. Requires Option 31 for full functionality.

 Fixed WiMAX Signal Analyzer (Option 885)¹
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Constellation	There are no additional OTA Measurements.	View Pass/Fail Limits
Channel Power	RCE (RMS/Peak)	RF and Demodulation measurements can be made OTA	All, RF, Modulation
Occupied Bandwidth	EVM (RMS/Peak)		Available Measurements
Power vs. Time	Frequency Error		Channel Power
Channel Power	Carrier Frequency		Occupied Bandwidth
Preamble Power	Base Station ID		Burst Power
Data Burst Power	Spectral Flatness		Preamble Power
Crest Factor	Adjacent Subcarrier Flatness		Crest Factor
ACPR	EVM vs. Subcarrier/Symbol		Frequency Error
RF Summary	RCE		Carrier Frequency
	EVM		EVM
	Frequency Error		RCE
	Carrier Frequency		Base Station ID
	Base Station ID		
	Modulation Summary		

Setup Parameters

Bandwidth (MHz)	1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00
Cyclic Prefix Ratio (CP)	1/4, 1/8, 1/16, 1/32
Span (MHz)	5, 10, 15, 20
Frame Length (ms)	2.5, 5.0, 10.0
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

RF Measurements (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

Demodulation (temperature range 15 °C to 35 °C)

Frequency Error	0.07 ppm + time base error, 99 % confidence level
Residual EVM (rms)	3 % typical, 3.5 % maximum (RF input -50 dBm to +20 dBm)

1. Requires Option 31 for full functionality.

 **Mobile WiMAX Signal Analyzer (Option 885)¹**
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Constellation	Channel Power Monitor	View Pass/Fail Limits
Channel Power	RCE (RMS/Peak)	Preamble Scanner (Six)	All, RF, Modulation
Occupied Bandwidth	EVM (RMS/Peak)	Preamble	Available Measurements
Power vs. Time	Frequency Error	Relative Power	Channel Power
Channel Power	CINR	Cell ID	Occupied Bandwidth
Preamble Power	Base Station ID	Sector ID	Downlink Burst Power
Downlink Burst Power	Sector ID	PCINR	Uplink Burst Power
Uplink Burst Power	Spectral Flatness	Dominant Preamble	Preamble Power
ACPR	Adjacent Subcarrier Flatness	Base Station ID	Crest Factor
Spectral Emission Mask	EVM vs. Subcarrier/Symbol	Auto Save - On/Off	Frequency Error
RF Summary	RCE (RMS/Peak)		Carrier Frequency
	EVM (RMS/Peak)		EVM
	Frequency Error		RCE
	CINR		Sector ID
	Base Station ID		
	Sector ID		
	DL-MAP (Tree View)		
	Modulation Summary		

Setup Parameters

Zone Type	PUSC
DL-MAP Auto Decoding	Convolutional Coding (CC), Convolutional Turbo Coding (CTC)
Bandwidth (MHz)	3.50, 5.00, 7.00, 8.75, 10.00
Cyclic Prefix Ratio (CP)	1/8
Span (MHz)	5, 10, 20, 30
Frame Length (ms)	5, 10
Demodulation	Auto, Manual, FCH
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

RF Measurements (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

Demodulation (temperature range 15 °C to 35 °C)

Frequency Error	0.02 ppm + time base error, 99 % confidence level
Residual EVM (rms)	2.5 % typical, 3.0 % maximum, (RF Input -50 dBm to +20 dBm)

Over-the-Air (OTA) Measurements

Channel Power Monitor	Over time (one week), measurement time interval 1 to 60 s
Preamble Scanner	Six Strongest Preambles
Auto Save	Yes
GPS Logging	Yes

1. Requires Option 31 for full functionality.

Mobile WiMAX conforms to IEEE Std. 802.16e-2005, WiMAX Forum® Air Interface - Mobile System Profile - Release 1.0 Certified, System Profiles according to WMF-T24-001-R010v07.

 TD-SCDMA/HSPA+ Signal Analyzer (Option 882)¹
Measurements

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Code Domain Power/Error (QPSK/8 PSK/16QAM/64QAM)	Code Scan (32)	View Pass/Fail Limits
Channel Power	Scrambling Code Group	Scrambling Code Group	All, RF, Demod
Occupied Bandwidth	Tau	Tau	Available Measurements
Left Channel Power	EC/IO	EC/IO	Occupied Bandwidth
Left Channel Occ B/W	DwPTS Power	DwPTS Power	Channel Power
Right Channel Power	Noise Floor	Pilot Dominance	Channel Power RCC
Right Channel Occ B/W	Frequency Error	Tau Scan (Six)	On/Off Ratio
Power vs. Time	Tau	Sync-DL#	Peak-to-Average Ratio
Six Slot Powers	Scrambling Code	Tau	Frequency Error
Channel Power (RRC)	EVM	EC/IO	EVM
DL-UL Delta Power	Peak EVM	DwPTS Power	Peak EVM
UpPTS Power	Peak Code Domain Error	Pilot Dominance	Peak Code Domain Error
DwPTS Power	CDP Marker	Record	Tau
On/Off Ratio	Modulation Summary	Run/Hold	Noise Floor
Slot Peak-to-Average Power			
Spectral Emission			
RF Summary			

Setup Parameters

Slot Selection	Auto, 0-6
Trigger	Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset
SYNC-DL Code	Auto, 0 - 31
Scrambling/Midamble Code	Auto, 0 - 127
Maximum Users	Auto, 2, 4, 6, 8, 10, 12, 14, 16
Measurement Speed	Fast, Normal, Slow
User Selectable	Uplink Switch Point, Number of Carriers (1, 3), Tau Offset
Demodulation Type	Auto, QPSK, 8PSK, 16QAM, 64QAM
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Hold/Run, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

RF Measurements (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy (RRC)	± 1.5 dB, ±1.0 dB typical, (slot power -40 dBm to +10 dBm)
Frequency Error	±10 Hz + time base error, in the presence of a downlink slot

Demodulation (temperature range 15 °C to 35 °C)

Supported Demodulation	QPSK, 8PSK, 16QAM, 64QAM
Residual EVM (rms)	3 % typical, P-CCPH slot power > -50 dBm
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical
Timing Error (Tau) for Dominant SYNC-DL	± 0.2 µs (external trigger)
Spreading Factor	1, 16

Over-the-Air (OTA) Measurements

Code Scanner	32 Sync Codes and associated Scrambling Code Groups
Tau Scanner	Six strongest Sync Codes
Auto Save	Yes
GPS Logging	Yes

1. Requires Option 31 for full functionality.



ISDB-T Signal Analyzer (Options 30, 79, 32)¹

Measurements

ISDB-T RF (Option 30)	ISDB-T Signal Analysis (Option 30)	ISDB-T BER Analysis (Option 79)	ISDB-T SFN Analysis (Option 32)
Signal Power	Constellation (w/zoom)	Layer A, Layer B, Layer C	Impulse Response (w/zoom)
Channel Power	Layer A, B, C, TMCC	BER and Error Count per Layer	In-band Spectrum
Termination Voltage	Sub-carrier MER	Before RS	Measured Data
Open Terminal Voltage	Delay Profile (w/zoom)	Before Viterbi	Channel Power
Field Strength	Frequency Response	PER and Error Count per Layer	Delay
Spectrum Monitor	Measured Data	MPEG Bit Rate per Layer	DU Ratio
Channel Power	Frequency	TMCC Information per Layer	Power
Zone Center Channel	Frequency Offset	Modulation	Field Strength
Zone Center Frequency	MER (Total, Layer A/B/C, TMCC, AC1)	Code Rate	
Spectrum Mask	Modulation (Layer A/B/C)	Interleave	
Mask (Standard A) Japan	Mode, GI	Segments	
Mask (Standard B) Japan	Sub-carrier MER w/marker	Channel Power	
Mask (Critical) Brazil	Delay w/marker	Mode, GI	
Mask (Sub-critical) Brazil	Frequency Response w/marker	Signal Sync Status	
Mask (Non-critical) Brazil		ASI Out	
Phase Noise			
Spurious Emissions			

ISDB-T Measurement Modes

Custom	User specified measurements and setup parameters
Easy	User specified measurements. Some setup parameters are automatically set or detected.
Batch	User specified measurements and channels for automatic measurement, and display and storage of results

Setup Parameters

Channel Map	UHF (Japan), UHF (Brazil), IF (37.15 MHz), None
Channel	13 to 62 (Japan), 14 to 69 (Brazil)
Frequency	35 MHz to 806 MHz
Bandwidths	6 MHz, 8 MHz
Partial Reception	Recognized when layer A segment count is 1
One-Seg	On: synchronizes with single segment transmission (Bandwidth 6 MHz only) Off: synchronizes with normal 13 segment signal
Pre-amp	On, Off
Reference Level Setting	-25 dBm to +20 dBm/5 dB steps (Preamp Off), -50 dBm to -10 dBm/10 dB steps (Preamp On)

ISDB-T Digital Video Measurements (Option 30)

Channel Power Accuracy	± 2 dB, (RF input -84 dBm to -10 dBm)
Frequency Lock Range	± 90 kHz
Frequency Offset Accuracy	± (measurement frequency x reference frequency accuracy) ± 0.3 Hz
Residual MER	≥ 42 dB, typical (Preamp Off, Reference level: -20 dBm) ≥ 37 dB, typical (Preamp On, Reference level: -50 dBm)
Sub-carrier MER Display Range	± 2.785 MHz from center frequency (Bandwidth 6 MHz) ± 3.714 MHz from center frequency (Bandwidth 8 MHz)
Delay Profile Resolution	0.12 µs (Bandwidth 6 MHz) 0.09 µs (Bandwidth 8 MHz)
Frequency Response Resolution	1 kHz, 0.1 dB
Phase Noise Range	-40 dBc/Hz to -140 dBc/Hz
Spurious Emissions Search Range	5 MHz to 5x input signal frequency

ISDB-T BER Measurements (Option 79) (temperature range 0 °C to 40 °C)

BER Measurement Display per Layer	Rate and Error count: Before Viterbi, Before RS
PER Measurement Display per Layer	Rate and Error count
TMCC Information Display per Layer	Modulation, Code Rate, Interleave, Number of segments
ASI Output	BNC-J 75 Ω

ISDB-T SFN Measurements (Option 32)

Delay Profile Display Range	-1008 µs to +1008 µs (Bandwidth 6 MHz)
Delay Wave Estimated Level Accuracy	± 2.5 dB typical (-10 dBm to -79 dBm)
DU Ratio Accuracy	± 1 dB typical (-10 dBm to -70 dBm)
Inband Spectrum Range	± 2.74 MHz (Mode 2), ± 2.76 MHz (Mode 3) (Bandwidth 6 MHz)

1. For full specifications, refer to the Digital Broadcast Analysis Options Technical Data Sheet 11410-00624.

**DVB-T/H Signal Analyzer (Options 64, 57, 78)¹****Measurements**

DVB-T/H RF (Option 64)	DVB-T/H Signal Analysis (Option 64)	DVB-T/H BER Analysis (Option 57)	DVB-T/H SFN Analysis (Option 78)
Signal Power	Composite or Individual Views	BER	Impulse Response (w/zoom)
Channel Power	Constellation	Before RS	Inband Spectrum
Termination Voltage	Impulse Response (w/zoom)	Before Viterbi	Measured Data
Open Terminal Voltage	Carrier MER (w/zoom)	PER (Packet)	Channel Power
Field Strength	Freq Response (composite view only)	Channel Power	Delay
Spectrum Monitor	Measured Data	MER (Quick)	DU Ratio
Channel Power	Mode, GI	Bit Rate	Power
Zone Center Channel	Modulation	TPS Info	Field Strength
Zone Center Frequency	Hierarchy	Length Indicator	
Shoulder Attenuation	Freq Offset	Mode, GI	
Channel Power	Channel Power	Modulation	
Zone Center Channel	MER (Total/Data/TPS)	Hierarchy	
Zone Center Frequency	TPS Warning Message	Interleave Type	
Lower Shoulder Attenuation	TPS Info	Cell ID	
Upper Shoulder Attenuation	Interleave Type	Code Rate	
	Cell ID	Time Slicing	
	Code Rate (HP/LP)	MPE-FEC	
	Time Slicing (HP/LP)	TPS Warning Message	
	MPE-FEC (HP/LP)	ASI Out	

Setup Parameters

Channel Map	UHF (Australia), UHF (Europe), VHF (Europe), None
Channel	28 to 69 (Australia), 21 to 69 (Europe), 5 to 12 (Europe)
Frequency Offset	± 166.666 kHz, ± 333.333 kHz, ± 499.999 kHz, None
Frequency	30 MHz to 2.8 GHz when Channel Map is None
Bandwidth	5*, 6*, 7, 8 MHz (* Not available for BER measurements)
Pre-amp	On, Off
Reference Level	-25 dBm to +20 dBm/5 dB steps (Preamp Off), -50 dBm to -10 dBm/10 dB steps (Preamp On)

DVB-T/H Digital Video Measurements (Option 64)

Channel Power Accuracy	± 2 dB, (RF input -84 dBm to -10 dBm)
Frequency Lock Range	± 90 kHz
Frequency Offset Accuracy	± (measurement frequency x reference frequency accuracy) ± 0.3 Hz
Residual MER	≥ 42 dB (Preamp Off, Reference Level: -20 dBm)
Impulse Response Resolution	≥ 37 dB (Preamp On, Reference Level: -50 dBm)
Carrier MER Marker	0.11 µs (Bandwidth: 8 MHz), 0.1 dB
Composite View	Carrier Number, Offset Frequency and MER
	Simultaneous display of Constellation (Data and TPS), Impulse Response, Carrier MER and Frequency Response

DVB-T/H BER Measurements (Option 57) (temperature range 0 °C to 40 °C)

Bit Count Setting	Range 1E+6 to 1E+12
Service Type	In Service: BER measurement of normal in-service data traffic Simultaneous BER measurement Before Viterbi and Before RS error correction Out of Service: BER measurement of a PRBS23 data sequence BER measurement point can be selected Before Viterbi, Before RS or After RS
TPS Information	Length indicator, Mode, GI, Modulation, Hierarchy, Inner Interleave, Cell ID, Code Rate, Time Slicing, MPE-FEC
ASI Output	BNC-J 75 Ω

DVB-T/H SFN Measurements (Option 78)

Impulse Response Display Range	-896 µs to +896 µs (Bandwidth 8 MHz)
Resolution	0.11 µs (33 m) (Bandwidth 8 MHz)
Marker	Delay time, relative level (DU ratio), power and field strength or termination voltage
In-band Spectrum Range	± 3.804 MHz (Bandwidth 8 MHz)

1. For full specifications, refer to the Digital Broadcast Analysis Options Technical Data Sheet 11410-00624.

General Specifications

System Parameters		
System	System	Status (Temperature, Battery Info, Serial Number, Firmware Version, Options Installed) Self Test, Application Self Test, GPS (see Option 31)
System Options		Name, Date and Time, Brightness, Volume Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, Russian, Portuguese) Reset (Factory Defaults, Master Reset, Update Firmware)
Internal Trace/Setup Memory		2,000 traces, 2,000 setups
External Trace/Setup Memory		Limited by size of USB Flash drive
Mode Switching		Auto-Stores/Recalls most recently used Setup Parameters in the Mode
File Management		
File Types		Vary with measurement mode
File	Save, Recall, Copy, Delete	
Save	Setups, Measurements, Screen Shots (JPEG)	
Recall	Setups, Measurements	
Copy	Selected file or files to internal/external memory (USB)	
Delete	Selected file or files from internal/external memory (USB)	
File Sort Method		By Name/Date/Type, Ascend/Descend
Connectors		
RF Out		Type N, female, 50 Ω (Reflection In)
RF Out Damage Level		+42 dBm, ± 50 VDC
RF In		Type N, female, 50 Ω
RF Input Damage Level		+30 dBm peak, ± 50 VDC, Maximum Continuous Input (≥ 10 dB attenuation)
ASI Output Connector		BNC-J 75 Ω (with Option 57 or Option 79)
GPS		SMA(f)
External Power		5.5 mm barrel connector, 12.5 VDC to 15 VDC, < 4.0 Amps
USB Interface (2)		Type A (Connect USB Flash Drive and Power Sensor)
USB Interface		5-pin mini-B (Connect to PC for data transfer and/or remote control)
Ethernet Interface		RJ45 connector for Ethernet 10-Base T
Headset Jack		3.5 mm mini-phone plug
External Reference In		BNC, female, Maximum Input +10 dBm, 1 MHz, 5 MHz, 10 MHz, 13 MHz
External Trigger/Clock Recovery		BNC, female, Maximum Input ± 5 VDC
RF over Fiber		SFP/SFP+ compatible socket (available with Option 759)
Display		
Type		Resistive Touchscreen
Size		8.4 inch daylight viewable color LCD
Resolution		800 x 600
Pixel Defects		No more than five defective pixels (99.9989% good pixels)
Battery		
Type		Li-Ion
Battery Operation		3.0 hours, typical
Battery Charging Limits		0 °C to +45 °C, Relative Humidity ≤ 80 %
Regulatory Compliance		
European Union		EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU
Australia and New Zealand		RCM AS/NZS 4417:2012
South Korea		KCC-REM-A21-0004
Environmental		
Operating Temperature Range		MIL-PRF-28800F Class 2
Storage Temperature Range		-10 °C to 55 °C
Maximum Relative Humidity		-51 °C to 71 °C
Vibration, Sinusoidal		95 % RH at 30 °C, non-condensing
Vibration, Random		5 Hz to 55 Hz
Half Sine Shock		10 Hz to 500 Hz
Altitude		30 g _n
Explosive Atmosphere		4600 meters, operating and non-operating
		MIL-PRF-28800F, Section 4.5.6.3
		MIL-STD-810G, Method 511.5, Procedure 1
ESD		
RF Port Center Pin		Withstands up to ± 15 kV
Size and Weight		
Size		273 mm x 199 mm x 91 mm (10.7 in x 7.8 in x 3.6 in)
Weight		3.71 kg (8.2 lb)
Warranty		
Duration		Standard three-year warranty (one-year warranty on battery)

**Line Sweep Tools** (for your PC)**Trace Capture**

Browse to Instrument	View and copy traces from the test equipment to your PC using Windows Explorer
Open Legacy Files	Open DAT files captured with Hand Held Software Tools v6.61
Open Current Files	Open VNA or DAT files
Capture Plots To	The Line Sweep Tools screen, DAT files, Database, or JPEG

Traces

Trace Types	Return Loss, VSWR, DTF-RL, DTF-VSWR, Cable Loss, and Smith Chart
Trace Formats	DAT, VNA, CSV, PNG, BMP, JPG, HTML, Data Base, and PDF

Report Generation

Report Generator	Includes GPS location along with measurements
Report Format	Create reports in HTML or PDF format
Report Setup	Report Title, Company, Prepared for, Location, Date and Time, Filename, Company logo
Trace Setup	1 Trace Portrait Mode, 2 Trace Portrait Mode, 1 Trace Landscape Mode

Trace Validation

Presets	7 presets allow "one click" setting of up to 6 markers and one limit line
Marker Controls	6 regular Markers, Marker Peak, Marker Valley, Marker between, and frequency entry
Delta Markers	6 Delta markers
Limit Line	Enable and drag or value entry. Also works with presets
Next Trace Button	Next Trace and Previous trace arrow keys allow quick switching between traces

Tools

Cable Editor	Allows creation of custom cable parameters
Distance to Fault	Converts a Return Loss trace to a Distance to Fault trace
Measurement Calculator	Converts Real, Imaginary, Magnitude, Phase, RL, VSWR, Rho, and Transmit power
Signal Standard Editor	Creates new band and channel tables
Renaming Grid	36 user definable phrases for creation of file names, trace titles, and trace subtitles

Connectivity

Connections	Ethernet, USB cable, USB memory stick
-------------	---------------------------------------

**easyTest Tools™** (for your PC)**Instrument Modes**

Cable & Antenna Analyzer
Spectrum Analyzer

Commands

Display Image	Allows putting a custom image on the instrument screen
Recall Setup	Places the instrument into a known state; auto-advance to next command available
Prompt	Displays instructional messages on the instrument screen; timed advance to next command available; instrument users can be allowed or disallowed from making setup adjustments
Save	Allows automatic or manual saving of traces; auto-advance to next command available

Connectivity

Connections	Ethernet, USB cable, USB memory stick
-------------	---------------------------------------

**easyMap Tools™** (create instrument-compatible maps on your PC)**Outdoor Maps**

On-Line Sources	Google Maps, Cloud Made Open-Source Maps
Pan & Zoom Mode	AZM map file format allows pan and zoom on-instrument
Legacy Mode	MAP format is compatible with older firmware
Geo-Referenced	Works with instrument based GPS
Map Conversion	Convert scanned maps to geo-referenced

Indoor Maps

Sources	Scanned images in JPG, JPEG, JPE, JFIF, GIF, TIF, TIFF, PNG
---------	---

General

Color Filter	Grayscale, High Contrast
Coverage	Worldwide
Zoom Levels	16 total zoom levels, 7 available in any one map
Map Size	Less than 1 MB to over 1 GB

 **Master Software Tools** (for your PC)
Measurement Viewing

Display	Modify display settings, including scale
Spectrum Traces	Add, delete, and modify limit lines and markers. Overlay traces.
Spectrum Analyzer Measurements	Field Strength, Occupied Bandwidth, Channel Power, ACPR, Emission Mask, C/I ¹
Interference Analyzer Measurements	Spectrograms, Signal Strength Meter, RSSI ²
Non-Spectrum Measurements	Hi Accuracy Power Meter, Channel Scanner, GSM, WCDMA/HSPA, LTE, TD-LTE, TD-SCDMA, CDMA, EV-DO, Fixed WiMAX, Mobile WiMAX, Screen captures (JPEGs)
	1. Spurious Emissions results viewable in a browser 2. Coverage Mapping and Interference Mapping files viewable in spreadsheet, Google Earth, or Google Maps

Database Management

Full Trace Retrieval	Retrieve all traces from instrument into one PC directory (limited to approximately 15,000 files)
Trace Catalog	Index all traces in selected folder & subfolder on PC into one catalog
Trace Rename Utility	Rename measurement traces
Group Edit	Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files

Data Analysis

Trace Math and Smoothing	Compare multiple traces
Measurement Calculator	Translate into other units

Report Generation

Report Generator	Includes GPS, power level, and measurements
Edit Graph	Change scale, limit lines, and markers
Report Format	Create reports in HTML
Export Measurements	Export measurements or entire folders to *.jpg or *.csv format
Notes	Annotate measurements

Mapping (GPS required on instrument)

Spectrum Analyzer Mode	MapInfo, MapPoint
Mobile WiMAX OTA, LTE OTA Options	Google Earth, Google Maps, MapPoint

Spectrogram (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)

Source	Recorded Spectrogram or multiple spectrum traces
Folder Spectrogram	2D View creates a composite file of multiple traces
Available Displays	Spectrogram, Peak Power vs. Time, Variation in Total Power vs. Time, Peak Frequency vs. Time, Number of Traces Saved vs. Time (useful with Save on Limit Exceeded), Maximum/Average/Minimum Power vs. Time File Filter (Violations over limit lines or deviations from averages)
Display Functions per Trace	Playback Markers, GPS location altitude and time (when recorded), instrument time Filename per trace for Folder Spectrogram
Export to Video	Create AVI file of 2D Spectrogram for management review/reports
Export to 3D Spectrogram	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - 2D (Frequency or Time Domain, Signal ID) - Top Down Playback (Frequency and/or Time Domain)

List/Parameter Editors

Antennas, Cables, Signal Standards	Modify instrument's Antenna, Cable, and Signal Standard List
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
Script Master	Create Script Master files for GSM/WCDMA or Channel Scanner
Languages	Modify non-English language menus
Mobile WiMAX	DL-MAP Parameters

Connectivity

Connections	Connect to PC using USB, LAN, or Direct Ethernet connection
Network Search	Find all Anritsu handheld instruments on local network
Download	Download measurements and live traces to PC for storage and analysis
Upload	Upload measurements and other files from PC to instrument
Export	Measurements can be saved in various formats, depending on the measurement type, including JPEG, CSV, and Anritsu DAT format
Printing	Print individual or all measurement screens

Web Remote Control (enabled with Option 413)

Control Connections	Full instrument control through a browser – all instrument functions except power switch and rotary knob RJ45 Ethernet jack Third party Wi-Fi router
Protocol	HTTP/TCP/IP
Physical Layer	Cat 5 Cable, Wi-Fi router compatible
Software Required	HTML 5-compliant browser – Google Chrome, Mozilla Firefox
Operating System	iOS, Windows, Linux, Android operating systems that can host the HTML 5-compliant browser
Remote Hardware Download	PCs, tablets, and smart phones with Ethernet or Wi-Fi connection and an HTML 5-compliant browser Individual instrument files downloaded via browser Multiple instrument files and directories zipped and downloaded via browser File downloads are not supported by iOS
Display Modes	Screen capture capability Normal: All modes and displays supported Fast: Spectrum traces update faster (up to 5 updates per second)
Password	The instrument can be password protected Passwords may be used to manage who is controlling the instrument
Users/Instruments	One user/device can view and control many instruments

Programmable Remote Control

Functionality	Many instrument functions are programmable. See the Programming Manual for details.
Programming Language	Standard Commands for Programmable Instruments (SCPI)
Interfaces	USB, Ethernet
Available Drivers	LabView. Visit NI.com for driver

Ordering Information - Options

	MT8213E	Description
	2 MHz to 6 GHz	Cable and Antenna Analyzer
	9 kHz to 6 GHz	Spectrum Analyzer
	10 MHz to 6 GHz	Power Meter
		Options
	MT8213E-0021	2-Port Transmission Measurement
	MT8213E-0010	Bias-Tee
	MT8213E-0031	GPS Receiver (requires Antenna)
	MT8213E-0019	High-Accuracy Power Meter (requires External Power Sensor)
	MT8213E-0025	Interference Analyzer (Option 31 recommended)
	MT8213E-0027	Channel Scanner
	MT8213E-0431	Coverage Mapping (requires Option 31)
	MT8213E-0444	EMF Measurements (requires Anritsu Isotropic Antenna)
	MT8213E-0090	Gated Sweep
	MT8213E-0028	C/W Signal Generator (requires CW Signal Generator Kit, P/N 69793)
	MT8213E-0752	CPRI LTE RF Measurements (requires Option 759)
	MT8213E-0753	OBSAI LTE RF Measurements (requires Option 759)
	MT8213E-0759	RF over Fiber Hardware (requires Option 752 or 753, cannot be ordered with Option 57, or 79)
	MT8213E-0880	GSM/GPRS/EDGE Measurements
	MT8213E-0881	W-CDMA/HSPA+ Measurements (Option 31 recommended.)
	MT8213E-0882	TD-SCDMA/HSPA+ Measurements (requires Option 31 for full functionality)
	MT8213E-0883	LTE/LTE-A FDD/TDD Measurements (requires Option 31 for full functionality)
	MT8213E-0886	LTE 256QAM Demodulation (requires Option 883)
	MT8213E-0887	NB-IoT Measurements
	MT8213E-0884	CDMA/EV-DO Measurements (requires Option 31 for full functionality)
	MT8213E-0885	WiMAX Fixed/Mobile Measurements (requires Option 31 for full functionality)
	MT8213E-0030	ISDB-T Digital Video Measurements
	MT8213E-0032	ISDB-T SFN Measurements
	MT8213E-0079	ISDB-T BER Measurements (requires Option 30; cannot be ordered with Option 759)
	MT8213E-0064	DVB-T/H Digital Video Measurements
	MT8213E-0078	DVB-T/H SFN Measurements
	MT8213E-0057	DVB-T/H BER Measurements (requires Option 64; cannot be ordered with Option 759)
	MT8213E-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate.
	MT8213E-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate, test report, and uncertainty data.

Standard Accessories (included with instrument)**Part Number Description**

2000-1371-R	Ethernet Cable, 7 ft (213 cm)
2000-1654-R	Soft Carrying Case
2000-1691-R	Stylus with Coiled Tether
2000-1797-R	Touchscreen Protective Film, 8.4 in
633-75	Rechargeable Li-Ion Battery, 7500 mAh
40-187-R	AC-DC Adapter
806-141-R	Automotive Power Adapter, 12 VDC, 60 W
3-2000-1498	USB A/5-pin mini-B Cable, 10 ft/305 cm

Manuals (available at www.anritsu.com)**Part Number Description**

10100-00065	Product Information, Compliance, and Safety
10580-00250	Cell Master User Guide
10580-00241	Cable and Antenna Analyzer Measurement Guide
10580-00242	2-Port Transmission Measurement
10580-00349	Spectrum Analyzer Measurement Guide
10580-00240	Power Meter Measurement Guide
10580-00234	3GPP Signal Analyzer Measurement Guide
10580-00235	3GPP2 Signal Analyzer Measurement Guide
10580-00236	WiMAX Signal Analyzer Measurement Guide
10580-00237	Digital TV Measurement Guide
10580-00238	Backhaul Analyzer Measurement Guide
10580-00415	CPRI LTE RF Analyzer Measurement Guide
10580-00434	OBSAI LTE RF Analyzer Measurement Guide
10580-00455	EMF Measurement Guide
10580-00256	Programming Manual

Troubleshooting Guides (available at www.anritsu.com)**Part Number Description**

11410-00473	Cable, Antenna and Components
11410-00551	Spectrum Analyzers
11410-00472	Interference
11410-00566	LTE eNodeB Testing
11410-00615	TD-LTE eNodeB Testing
11410-00466	GSM/GPRS/EDGE Base Stations
11410-00463	W-CDMA/HSDPA Base Stations
11410-00465	TD-SCDMA/HSDPA Base Stations
11410-00467	cdmaOne/CDMA2000 1X Base Stations
11410-00468	CDMA2000 1xEV-DO Base Stations
11410-00470	Fixed WiMAX Base Stations
11410-00469	Mobile WiMAX Base Stations
11410-00552	T1/DS1 Backhaul Testing
11410-00553	E1 Backhaul Testing

Power Sensors (for complete ordering information, see the respective data sheets of each sensor)**Model Number Description**

MA24105A	Inline Peak Power Sensor, 350 MHz to 4 GHz, +3 dBm to +51.76 dBm
MA24106A	RF USB Power Sensor, 50 MHz to 6 GHz, +23 dBm
MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm
MA24208A	Microwave Universal USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24218A	Microwave Universal USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24330A	Microwave CW USB Power Sensor, 10 MHz to 33 GHz, +20 dBm
MA24340A	Microwave CW USB Power Sensor, 10 MHz to 40 GHz, +20 dBm
MA24350A	Microwave CW USB Power Sensor, 10 MHz to 50 GHz, +20 dBm
MA25100A	RF Power Indicator

Optional Accessories

Calibration Components, 50 Ω



Part Number Description

ICN50B	InstaCal™ Calibration Module, 38 dB, 2 MHz to 6.0 GHz, N(m), 50 Ω
OSLN50A-8	High Performance Type N(m), DC to 8 GHz, 50 Ω
OSLNF50A-8	High Performance Type N(f), DC to 8 GHz, 50 Ω
2000-1914-R	Precision Open/Short/Load, 4.3-10(f), DC to 6 GHz, 50 Ω
2000-1915-R	Precision Open/Short/Load, 4.3-10(m), DC to 6 GHz, 50 Ω
2000-1618-R	Precision Open/Short/Load, 7/16 DIN(m), DC to 6.0 GHz, 50 Ω
2000-1619-R	Precision Open/Short/Load, 7/16 DIN(f), DC to 6.0 GHz, 50 Ω
22N50	Open/Short, N(m), DC to 18 GHz, 50 Ω
22NF50	Open/Short, N(f), DC to 18 GHz, 50 Ω
SM/PL-1	Precision Load, N(m), 42 dB, 6.0 GHz, 50 Ω
SM/PLNF-1	Precision Load, N(f), 42 dB, 6.0 GHz, 50 Ω

Calibration Components, 75 Ω



Part Number Description

22N75	Open/Short, N(m), DC to 3 GHz, 75 Ω
22NF75	Open/Short, N(f), DC to 3 GHz, 75 Ω
26N75A	Precision Termination, N(m), DC to 3 GHz, 75 Ω
26NF75A	Precision Termination, N(f), DC to 3 GHz, 75 Ω
12N50-75B	Matching Pad, DC to 3 GHz, 50 Ω to 75 Ω

Adapters



Part Number Description

1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172-R	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω
1091-417-R	N(m) to QMA(f), DC to 6 GHz, 50 Ω
1091-418-R	N(m) to QMA(m), DC to 18 GHz, 50 Ω
1091-465-R	Adapter, DC to 6 GHz, 4.3-10(f) to N(f), 50 Ω
1091-467-R	Adapter, DC to 6 GHz, 4.3-10(m) to N(f), 50 Ω
510-90-R	7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω
510-91-R	7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω
510-92-R	7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω
510-93-R	7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω
510-96-R	7/16 DIN(m) to 7/16 DIN (m), DC to 7.5 GHz, 50 Ω
510-97-R	7/16 DIN(f) to 7/16 DIN (f), DC to 7.5 GHz, 50 Ω
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle

Precision Adapters



Part Number Description

34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFNF50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

Backpack and Transit Case



Part Number Description

67135	Anritsu Backpack (for Handheld Instrument and PC)
760-243-R	Large Transit Case with Wheels and Handle 56 cm x 45.5 cm x 26.5 cm (22.07" x 17.92" x 10.42")
760-261-R	Large Transit Case with Wheels and Handle 63.1 cm x 50 cm x 30 cm (24.83" x 19.69" x 11.88"), space for MA2700A, antennas, filters, instrument inside soft case, and other interference hunting accessories/tools
760-262-R	Transit Case for MA2700A, several Yagi antennas and filters
760-271-R	Transit Case for Portable Directional Antennas and Port Extender 52.4 cm x 42.8 cm x 20.6 cm (20.62" x 16.87" x 8.12") (for 2000-1777-R, 2000-1778-R, 2000-1779-R, 2000-1798-R)
760-286-R	Compact Transit Case with Wheels and Handle 55.6 cm x 35.5 cm x 22.9 cm (21.89" x 13.98" x 9.01")

Optional Accessories (continued)

Miscellaneous Accessories



Part Number	Description
2000-1374	External Dual Charger for Li-Ion Batteries
633-75	Rechargeable Li-Ion Battery, 7500 mAh
69793	CW Signal Generator Kit
2000-1689-R	EMI Near Field Probe Kit
MA2700A	Handheld Interference Hunter (For full specifications, refer to the MA2700A Technical Data Sheet 11410-00692)
2000-1884-R	PIM Hunter™ Test Probe (For full specifications, refer to the 2000-1884-R Technical Data Sheet 11410-00999)
2000-1691-R	Stylus with Coiled Tether
2000-1797-R	Touchscreen Protective Film, 8.4 in
2000-1798-R	Port Extender, DC to 6 GHz, N(m) to N(f)
MA25401A	Atomic Clock, External, 10 MHz Frequency Reference (see 11410-01134 for details)
66864	Rack Mount Kit, Master Platform

Filters



Part Number	Description
1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω
1030-105-R	890 MHz to 915 MHz, N(m) to N(f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz, N(m) to N(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz, N(m) to N(f), 50 Ω
1030-149-R	High Pass, 150 MHz, N(m) to N(f), 50 Ω
1030-150-R	High Pass, 400 MHz, N(m) to N(f), 50 Ω
1030-151-R	High Pass, 700 MHz, N(m) to N(f), 50 Ω
1030-152-R	Low Pass, 200 MHz, N(m) to N(f), 50 Ω
1030-153-R	Low Pass, 550 MHz, N(m) to N(f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω
1030-178-R	1920 MHz to 1980 MHz, N(m) to N(f), 50 Ω
1030-179-R	777 MHz to 798 MHz, N(m) to N(f), 50 Ω
1030-180-R	2500 MHz to 2570 MHz, N(m) to N(f), 50 Ω
2000-1684-R	791 MHz to 821 MHz, N(m) to N(f), 50 Ω
2000-1734-R	Bandpass Filter, 699 MHz to 715 MHz, N(m) and N(f), 50 Ω
2000-1735-R	Bandpass Filter, 776 MHz to 788 MHz, N(m) and N(f), 50 Ω
2000-1736-R	Bandpass Filter, 815 MHz to 850 MHz, N(m) and N(f), 50 Ω
2000-1737-R	Bandpass Filter, 1711 MHz to 1756 MHz, N(m) and N(f), 50 Ω
2000-1738-R	Bandpass Filter, 1850 MHz to 1910 MHz, N(m) and N(f), 50 Ω
2000-1739-R	Bandpass Filter, 880 MHz to 915 MHz, N(m) and N(f), 50 Ω
2000-1740-R	Bandpass Filter, 1710 MHz to 1785 MHz, N(m) and N(f), 50 Ω
2000-1741-R	Bandpass Filter, 1920 MHz to 1980 MHz, N(m) and N(f), 50 Ω
2000-1742-R	Bandpass Filter, 832 MHz to 862 MHz, N(m) and N(f), 50 Ω
2000-1743-R	Bandpass Filter, 2500 MHz to 2570 MHz, N(m) and N(f), 50 Ω
2000-1799-R	Bandpass Filter, 2305 MHz to 2320 MHz, N(m) and N(f), 50 Ω
2000-1911-R	Bandpass Filter, 703 MHz to 748 MHz, N(m) and N(f), 50 Ω
2000-1912-R	Bandpass Filter, 788 MHz to 798 MHz, N(m) and N(f), 50 Ω
2000-1925-R	Bandpass Filter, 663 MHz to 698 MHz, N(m) and N(f), 50 Ω
2000-1926-R	Bandpass Filter, 776 MHz to 806 MHz, N(m) and N(f), 50 Ω

Attenuators



Part Number	Description
3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 50 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Uni-directional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Uni-directional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

Optional Accessories (continued)

Phase-Stable Test Port Cables, Armored w/Reinforced Grip (recommended for cable & antenna line sweep applications)



Part Number Description

15RNFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15RNFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω

Interchangeable Adaptor Phase Stable Test Port Cables, Armored w/Reinforced Grip (recommended for cable and antenna line sweep applications. It uses the same ruggedized grip as the Reinforced grip series cables. Now you can also change the adaptor interface on the grip to four different connector types.)



Part Number Description

15RCN50-1.5-R	1.5 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω
15RCN50-3.0-R	3.0 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω

Phase-Stable Test Port Cables, Armored (recommended for use with tightly spaced connectors and other general purpose applications)

Part Number Description



15NNF50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NDF50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15ND50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15NNF50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NNF50-5.0C	5.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-5.0C	5.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15N43M50-1.5C	Test Port Extension Cable, Armored, 1.5 meters, DC to 6GHz, N(m) to 4.3-10(m)
15N43F50-1.5C	Test Port Extension Cable, Armored, 1.5 meter, DC to 6GHz, N(m) to 4.3-10(f)
15N43M50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(m) to 4.3-10(m)
15N43F50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(m) to 4.3-10(f)
15NF43M50-1.5C	Test Port Extension Cable, Armored, 1.5 meters, DC to 6 GHz, N(f) to 4.3-10(m)
15NF43F50-1.5C	Test Port Extension Cable, Armored, 1.5 meters, DC to 6 GHz, N(f) to 4.3-10(f)
15NF43M50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(f) to 4.3-10(m)
15NF43F50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(f) to 4.3-10(f)

Optional Accessories (continued)**RF over Fiber Accessories****Part Number Description**

67-12-R	Optical Tap; Single Mode/Multi Mode 80/20 Tap
67-13-R	Optical Tap; Single Mode 80/20 Tap
67-14-R	Optical Tap; Single Mode/Multi Mode 50/50 Tap
67-15-R	Optical Tap; Single Mode 50/50 Tap
68-5-R	SFP (Optical Module), MM (Multi Mode) 4.25 Gbps, 850 nm, 500 m
68-6-R	SFP+ (Optical Module), MM (Multi Mode) 8 Gbps FC/10G SR 850 nm
68-7-R	SFP (Optical Module), SM (Single Mode) 2.7 Gbps, 1310 nm, 15 km
68-8-R	SFP+ (Optical Module), SM (Single Mode) 10 Gbps LR, 1310 nm
68-9-R	SFP (Optical Module), SM (Single Mode) 3.07 Gbps, 1310 nm
68-10-R	SFP (Optical Module), MM (Multi Mode) 3.7 Gbps, 850 nm
68-11-R	SFP+ (Optical Module), SM (Single Mode) 10.5 Gbps, 1310 nm
68-12-R	SFP+ (Optical Module), MM (Multi Mode) 10.5 Gbps, 850 nm
68-16-R	SFP+ (Optical Module), SM (Single Mode) 9.83 Gbps, 1310 nm
808-16-R	Fiber Optic Cable, 3 m, Duplex MM (Multi Mode) 1.6 mm LC/PC LC/PC 50 µm
808-17-R	Fiber Optic Cable, 3 m, Simplex MM (Multi Mode) 1.6 mm LC/UPC LC/UPC 50 µm
808-18-R	Fiber Optic Cable, 3 m, Ruggedized Simplex SM (Single Mode) LC/UPC LC/UPC
808-19-R	Fiber Optic Cable, 3 m, Ruggedized Duplex SM (Single Mode) LC/UPC LC/UPC
2100-29-R	Fiber Optic Cable, 3 m, Simplex SM (Single Mode) LC/UPC
2100-30-R	Fiber Optic Cable, 10 m, Simplex MM (Multi Mode) LC-SC
2100-31-R	Fiber Optic Cable, 3 m, Duplex SM (Single Mode) LC/UPC
971-14-R	Ferrule Cleaner, 2.5 mm SC
971-15-R	Ferrule Cleaner, 1.25 mm LC
971-16	Fiber Ferrule Cleaner
2000-1849-R	SFP 4-slot ESD Box

Directional Antennas**Part Number Description**

2000-1411-R	824 MHz to 896 MHz, N(f), 12.3 dBi, Yagi
2000-1412-R	885 MHz to 975 MHz, N(f), 12.6 dBi, Yagi
2000-1413-R	1710 MHz to 1880 MHz, N(f), 12.3 dBi, Yagi
2000-1414-R	1850 MHz to 1990 MHz, N(f), 11.4 dBi, Yagi
2000-1415-R	2400 MHz to 2500 MHz, N(f), 14.1 dBi, Yagi
2000-1416-R	1920 MHz to 2170 MHz, N(f), 14.3 dBi, Yagi
2000-1659-R	698 MHz to 787 MHz, N(f), 10.1 dBi, Yagi
2000-1660-R	1425 MHz to 1535 MHz, N(f), 14.3 dBi, Yagi
2000-1715-R	Directional Antenna, 698 MHz to 2500 MHz, N(f), gain of 2 dBi to 10 dBi, typical
2000-1726-R	Antenna, 2500 MHz to 2700 MHz, N(f), 14.1 dBi, Yagi
2000-1747-R	Antenna, Log Periodic, 300 MHz to 7000 MHz, N(f), 5.1 dBi, typical
2000-1748-R	Antenna, Log Periodic, 1 GHz to 18 GHz, N(f), 6 dBi, typical
2000-1777-R	Portable Directional Antenna, 9 kHz to 20 MHz, N(f)
2000-1778-R	Portable Directional Antenna, 20 MHz to 200 MHz, N(f)
2000-1779-R	Portable Directional Antenna, 200 MHz to 500 MHz, N(f)
2000-1812-R	Portable Yagi Antenna, 450 MHz to 512 MHz, N(f), 7.1 dBi
2000-1825-R	Portable Yagi Antenna, 380 MHz to 430 MHz, N(f), 7.1 dBi

Isotropic Antennas**Part Number Description**

2000-1791-R	Isotropic Antenna, 700 MHz to 6000 MHz, N(m)
2000-1792-R	Isotropic Antenna, 30 MHz to 3000 MHz, N(m)
2000-1800-R	Isotropic Antenna, 9 kHz to 300 MHz, N(m)

Optional Accessories (continued)**Portable Antennas****Part Number Description**

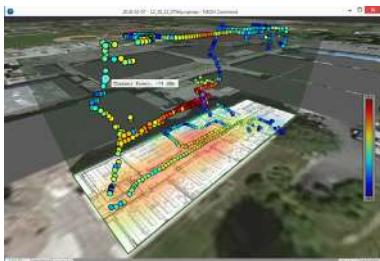
2000-1200-R	806 MHz to 866 MHz, SMA(m), 50 Ω
2000-1473-R	870 MHz to 960 MHz, SMA(m), 50 Ω
2000-1035-R	896 MHz to 941 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1030-R	1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1474-R	1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
2000-1031-R	1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1475-R	1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
2000-1032-R	2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1361-R	2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
2000-1636-R	Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)
2000-1751-R	Dipole, 698-960/1710-2170/2500-2700 MHz, SMA(m), 2 dBi, typical, 50 Ω

GPS Antennas**Part Number Description**

2000-1528-R	GPS Antenna, SMA(m) with 5 m (15 ft) cable, 3 dBi gain, requires 5 VDC
2000-1652-R	GPS Antenna, SMA(m) with 0.3 m (1 ft) cable, 5 dBi gain, requires 3.3 VDC or 5 VDC
2000-1760-R	GPS Antenna, SMA(m), 25 dB gain, 2.5 VDC to 3.7 VDC

Mag Mount and Broadband Antennas**Part Number Description**

2000-1616-R	20 MHz to 21000 MHz, N(f), 50 Ω
2000-1645-R	694 MHz to 894 MHz 3 dBi peak gain, 1700 MHz to 2700 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft
2000-1646-R	750 MHz to 1250 MHz 3 dBi peak gain, 1650 MHz to 2700 MHz 5 dBi peak gain
2000-1647-R	Cable 1: 698 MHz to 1200 MHz, 2 dBi peak gain, 1700 MHz to 2700 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft
2000-1946-R	Cable 1: 617 MHz to 960 MHz, 3 dBi peak gain, 1710 MHz to 3700 MHz, 4 dBi peak gain, N(m), 50 Ω, 10 ft Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft
2000-1648-R	1700 MHz to 6000 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft

NEON® MA8100A Signal Mapper**Model Number Description**

MA8100A-001	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service.
MA8100A-003	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
MA8100A-005	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service.
MA8100A-100	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
2300-606	Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service. Part number can also be used to order a perpetual license after a limited term license has expired.
2300-612	Renewal of 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service.
2300-613	Renewal of 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
2300-614	Renewal of 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service.

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training.



• United States

Anritsu Americas Sales Company

450 Century Parkway, Suite 190
Allen, TX 75013, U.S.A.

Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada

Phone: +1-613-591-2003

Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP
Brazil

Phone: +55-11-3288-2511

Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Bvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada
Mexico, Ciudad de México, 11520, MEXICO

Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA L td.

200 Capability Green
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1-Silic 612,
91140 Villebon-sur-Yvette, France

Phone: +33-1-60-92-15-50

Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

List Revision Date: 20191126

• Sweden

Anritsu AB

Isafjordsgatan 32C
164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB

Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

c/o Regus Fairway, Arne Jacobsens Allé 7, 5th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Moscow 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain
Paseo de la Castellana, 141.
Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office
902 Aurora Tower
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited

6th Floor, Indique ETA, No.38/4
Adjacent to EMC2, Doddanekundi, Outer Ring Road
Bengaluru 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shiro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F.
Greenfield Tower, Concordia Plaza
No. 1 Science Museum Road
Tsim Sha Tsui East, Kowloon
Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoeyeok-ro
Bundang-gu, Seongnam-si
Gyeonggi-do 13494, South Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd. Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817