

---

# NI-9211 and sbRIO-9211 Specifications

---

2024-06-14



# Contents

NI-9211 and sbRIO-9211 Specifications..... 3

# NI-9211 and sbRIO-9211 Specifications

## Terminology & Naming Conventions

In these specifications, the NI-9211 and sbRIO-9211 are referred to inclusively as the NI-9211.

## Definitions

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

**Characteristics** describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

### Related information:

- [Software Support for CompactRIO, CompactDAQ, Single-Board RIO, R Series, and EtherCAT](#)

## Conditions

Specifications are valid for the range -40 °C to 70 °C unless otherwise noted.

Accuracy within typical use can vary based on chassis, mounting parameters, other modules present in the system, and installed accessories.

## Input Characteristics

Number of channels	4 thermocouple channels, 1 internal autozero channel, 1 internal cold-junction compensation channel	
ADC resolution	24 bits	
Type of ADC	Delta-Sigma	
Sampling mode	Scanned	
Voltage measurement range	$\pm 80$ mV	
Temperature measurement ranges	Works over temperature ranges defined by NIST (J, K, T, E, N, B, R, S thermocouple types)	
Conversion time	70 ms per channel; 420 ms total for all channels including the autozero and cold-junction channels	
<b>Common-mode voltage range</b>		
Channel-to-COM	$\pm 1.5$ V	
COM-to-earth ground	$\pm 250$ V	
<b>Common-mode rejection ratio (0 Hz to 60 Hz)</b>		
Channel-to-COM	95 dB	

COM-to-earth ground	>170 dB
Input bandwidth (-3 dB)	15 Hz
Noise rejection (at 50 Hz and 60 Hz)	85 dB minimum
Overtoltage protection	±30 V between any input and COM
Differential input impedance	20 MΩ
Input current	50 nA
Input noise	1 μV RMS
Gain error (at -40 °C to 70 °C)	0.06% typical, 0.1% maximum
Offset error (with autozero channel on)	±15 μV typical, ±20 μV maximum
Gain error from source impedance	Add 0.05 ppm per Ω when source impedance >50 Ω
Offset error from source impedance	Add ±0.05 μV typical, ±0.07 μV maximum per Ω when source impedance >50 Ω

Cold-junction compensation sensor accuracy	
0 °C to 70 °C	±0.6 °C typical, ±1.3 °C maximum
-40 °C to 70 °C	±1.7 °C maximum
MTBF	633,012 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method


## Temperature Measurement Accuracy

Measurement sensitivity <sup>1</sup>	
With autozero channel on	
Types J, K, T, E, N	<0.07 °C
Type B	<0.25 °C
Types R, S	<0.60 °C
With autozero channel off	
Types J, K, T, E, N	<0.05 °C
Type B	<0.20 °C
Types R, S	<0.45 °C


1. Measurement sensitivity represents the smallest change in temperature that a sensor can detect. It is a function of noise. The values assume the full measurement range of the standard thermocouple

The following figures show the typical and maximum errors for each thermocouple type when used with the NI-9211 over the full temperature range and autozero on. The figures account for gain errors, offset errors, differential and integral nonlinearity, quantization errors, noise errors, and isothermal errors. The figures do not account for the accuracy of the thermocouple itself.


**Figure 1. Thermocouple Type J and N Errors**

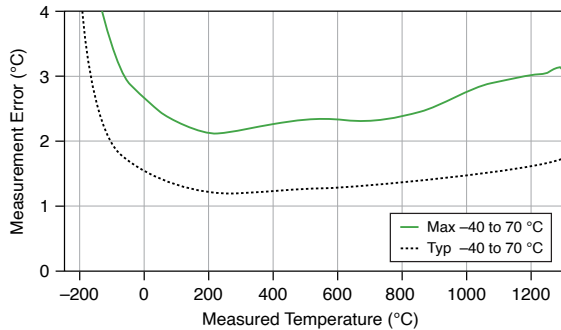

**Figure 2. Thermocouple Type K Errors**

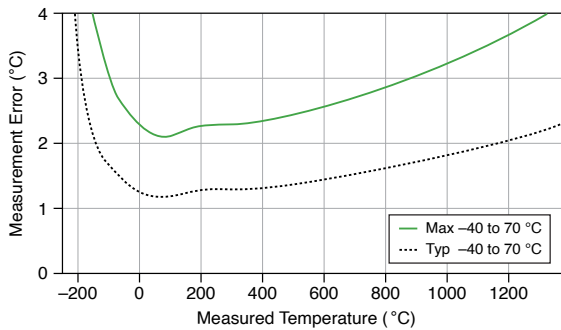


**Figure 3. Thermocouple Type T and E Errors**

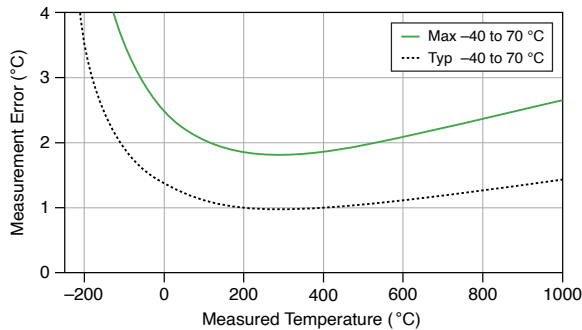


sensor according to ASTM E230-87.

**Figure 4. Thermocouple Type B Errors**

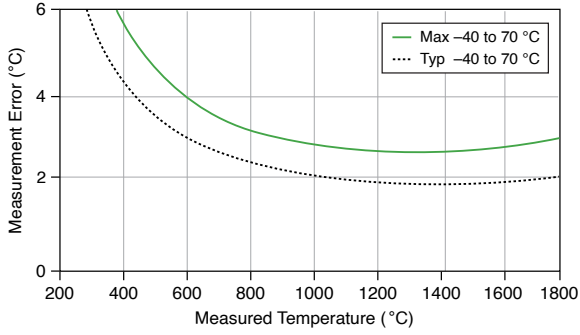

**Figure 5. Thermocouple Type R and S Errors**

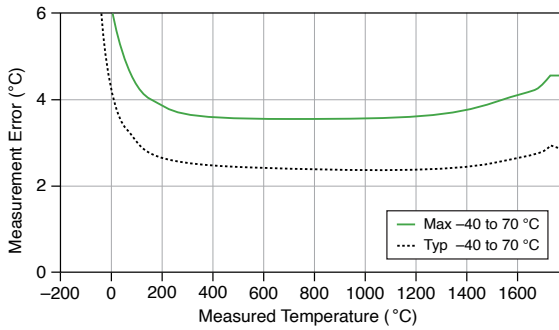

## Safety Voltages

Connect only voltages that are within the following limits.

Channel-to-COM	±30 V maximum	
<b>Isolation</b>		
Channel-to-channel	None	
<b>Channel-to-earth ground</b>		
Continuous	250 V RMS, Measurement Category II	
Withstand	2,300 V RMS, verified by a 5 s dielectric withstand test	



## Measurement Category II



**Caution** Do not connect the product to signals or use for measurements within Measurement Categories III or IV.



**Attention** Ne pas connecter le produit à des signaux dans les catégories de mesure III ou IV et ne pas l'utiliser pour effectuer des mesures dans ces catégories.

Measurement Category II is for measurements performed on circuits directly connected to the electrical distribution system. This category refers to local-level electrical distribution, such as that provided by a standard wall outlet, for example, 115 V for U.S. or 230 V for Europe.

## Environmental Characteristics

Temperature	
Operating	-40 °C to 70 °C
Storage	-40 °C to 85 °C
Humidity	
Operating	10% RH to 90% RH, noncondensing
Storage	5% RH to 95% RH, noncondensing
Ingress protection	IP40
Pollution Degree	2

Maximum altitude	2,000 m
<b>Shock and Vibration</b>	
<b>Operating vibration</b>	
Random	5 g RMS, 10 Hz to 500 Hz
Sinusoidal	5 g, 10 Hz to 500 Hz
Operating shock	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

To meet these shock and vibration specifications, you must panel mount the system.

## Power Requirements

<b>Power consumption from chassis</b>	
Active mode	170 mW maximum
Sleep mode	4 mW maximum
<b>Thermal dissipation (at 70 °C)</b>	
Active mode	170 mW maximum
Sleep mode	4 mW maximum

## Physical Characteristics

Screw-terminal wiring
-----------------------

Gauge	0.25 mm <sup>2</sup> to 2.5 mm <sup>2</sup> (24 AWG to 12 AWG) copper conductor wire	
Wire strip length	7 mm (0.28 in.) of insulation stripped from the end	
Temperature rating	90 °C, minimum	
Torque for screw terminals	0.3 N · m (2.66 lb · in.)	
Wires per screw terminal	One wire per screw terminal	
<b>Connector securement</b>		
Securement type	Screw flanges provided	
Torque for screw flanges	0.2 N · m (1.80 lb · in.)	
Dimensions	Visit <a href="https://ni.com/dimensions">ni.com/dimensions</a> and search by module number.	
Weight	150 g (5.3 oz)	

## Calibration

You can obtain the calibration certificate and information about calibration services for the NI-9211 at [ni.com/calibration](https://ni.com/calibration).

Calibration interval	1 year
----------------------	--------